




### Product Advantages:

- Indirect heating by tubular heating elements, with thermostatic temperature control.
- Integrated appliance switch, control lamp and dry run protection.
- Completely wired internally.
- Easy to clean.
- Body is buckling resistant.
- Visible surfaces with polished and satin finish.
- Feet are adjustable in height.
- Basin equipped for insertion of a 1/1 GN container, 200 mm deep.
- Welded drain valve DN 20 at the front – with key confirmation for safe discharge.

### Installation requirements:

- Electrical supply provided by customer.

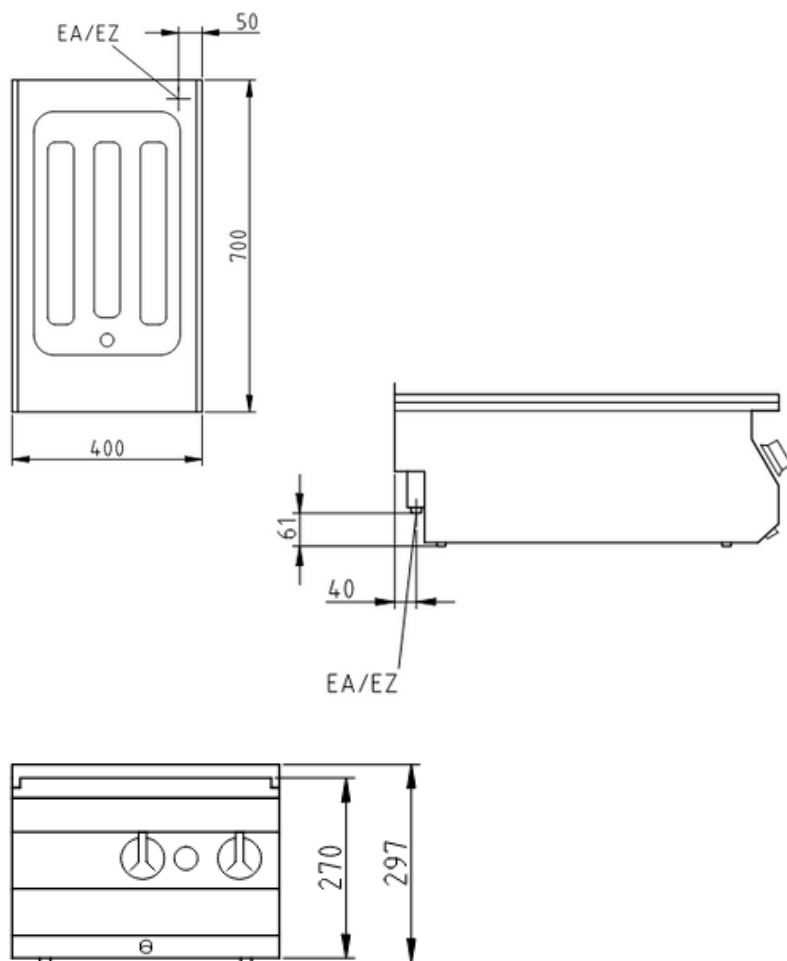

### Technical Data:

Width x Height x Depth (mm)	400 x 270 x 700
Effective area	1
Dim.: effect. Area (mm)	305 x 510 x 215
Connected load (elect.) (kW):	1.5
Voltage (V) / EC:	240 single phase
Recommended fuses (A):	1 x 10
Net weight (kg):	15
Gross weight (kg):	22
Heat emission latent (W):	400
Heat emission sensitive (W):	250
Type of protection:	IPX4

