

ALFA420E1HDS

Product Family	Ovens
Subfamily	Convection oven 4 trays EN 600x400 mm or GN1/1
Oven type	Fan with humidification
Oven controls	Electronic
Tray capacity	4 trays 600x400 mm - GN1/1
Default power supply	400 V 3N~ / 10 A / 6,9 kW / 50-60 Hz
Other electrical connections	230 V~ / 30 A / 6.9 kW / 50-60 Hz
Steam technology	Direct
App for recipe development and upload	Not available
Maximum depth with open door	1145 mm
Adjustable feet	Yes
Net weight (kg)	63.000 kg
Product dimensions WxDxH	798x747x563 mm
EAN code	8017709322939



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's shops; QSR	Suggested for	Bars/Cafes
------------------------	---	----------------------	------------

Aesthetics

Colour	Stainless steel	Digital display colour	White
Door with stainless steel strip	Yes	Front panel	Yes
Display type	Yes	Logo	Smeg printed

Controls


Number of recipes	100	Cooking steps	3 + pre-heating
Adjustable timer	1 min - 99hrs + continuous	HACCP data	Scheduled start H/12

Options

Condense hood	K4610X
----------------------	--------


Construction

Oven material	Stainless steel/glass/plastics	Humidification system on each fan	Yes
Cavity dimensions (WxDxH)	672x437x340mm	Steam assisted levels	5 + manual
Gross volume	670x560x420mm	Exhaust exit	Back
Net volume	670x560x420mm	Cooling system	Yes
Internal net volume	75 lt	Time adjustment	Electronic timer
Cavity material	Stainless steel	Temperature range	50-280°C
No. of shelves	4	End of cooking alarm	Yes
Tray support frame	Chrome	Heating element interruption with open door	Yes
Distance between shelves	77 mm	Manual safety thermostat reset	Yes
Door construction	Yes	Core probe cooking with Δt	Yes
Door opening	Drop down	Removable deflector	Yes
Handle type	Smeg	No. of lights	2 LED lights
Inner glass	Removable	Light power	40 W
Fan type and number	2 contrarotating fans with time direction reversal	USB port	Yes
Fan motor power	200W	Water connection	Yes
Fan speed	Double speed	Power cable length	170 cm
Max motor speed (rpm)	2	Back panel	Galvanized
Low motor speed (rpm)	2	IPX protection	Scheduled start H/12

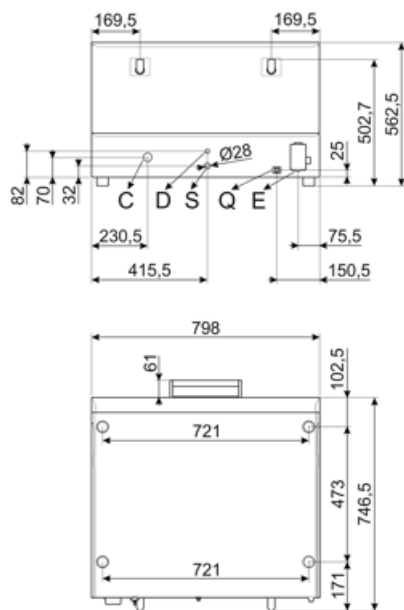

Q	MORSETTO EQUIPOTENZIALE
E	EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA
	ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO
	FILLER HOSE
S	TUBO DI SCARICO (solo su alcuni modelli)
	DRAIN HOSE (on some models only)
D	TUBO DI CARICO PER DOCCETTA LAVAGGIO
	(solo su alcuni modelli)
	WATER SUPPLY MANUAL WASHING SYSTEM
	(on some models only)

Not included accessories



3743

Flat aluminium tray




3751

Flat perforated aluminium tray



3805

Flat chrome-plated wire grid



3810

Corrugated grid for baguettes



3927

Air flow reducer kit



RGN11-420-2

Support kit for grids or flat trays GN1/1 suitable for ALFA420/425/410 models



SVRPP420-625

Connector kit for two stacked ALFA420+420 or ALFA420+625 models and hood



T11TH20

2cm height GN1/1 non-stick tray for Galileo professional



T11TH40

4cm height GN1/1 non-stick tray for Galileo professional




T11XH20

2cm height aluminium GN1/1 tray for Galileo professional




T11XH65

6,5cm height aluminium GN1/1 tray for Galileo professional



TF11XH2

Perforated aluminium GN1/1 tray for Galileo professional



TMF11TH2

GN 1/1 non-sticking microperforated tray

Symbols glossary



Core probe



Core probe + Δt



Double speed fan



Fan forced



Fan with humidification