

Product Name	Drop-in Single Hob Cooktop	Quantity	Item #
--------------	----------------------------	----------	--------



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Drop-in countertop design with stainless steel edging, aluminum housing and control box, heavy duty electronic components, and high impact, thick, glass-ceramic top engineered for use in commercial kitchens
- Control knob for ease of use and automatic power or temperature control
- Temperature control allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Drop-in cooktops and control boxes engineered and manufactured for easy installation
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool
- Available in 2500 and 3500 watts (208-240VAC)
- Three years parts and one year labour warranty
- Made in the USA*

Specifications

Shall be a CookTek drop-in induction cooktop, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed with a stainless steel edging and aluminum control box.


Unit shall be equipped with a built-in microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of induction compatible pans.

Unit shall have an adjustable electronic control with 20 power cook settings and 27 precise temperature settings.

Unit shall have a LED display located underneath the top for precise user feedback.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

*of USA and imported parts

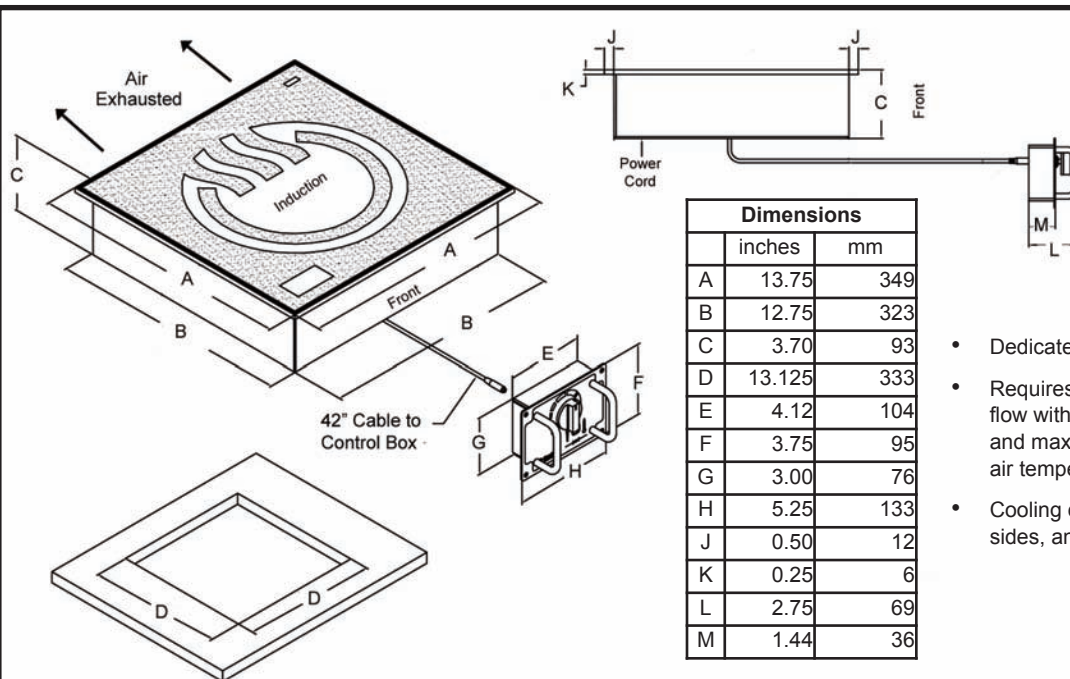

Dimensions		
	inches	mm
A	13.75	349
B	12.75	323
C	3.70	93
D	13.125	333
E	4.12	104
F	3.75	95
G	3.00	76
H	5.25	133
J	0.50	12
K	0.25	6
L	2.75	69
M	1.44	36

- Dedicated circuit required
- Requires 70 CFM (2.0m³/min) free air flow with adequate enclosure venting and maximum (do not exceed) ambient air temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear, 6" (152mm) below



Specifications

	MCD2500		MCD3500	
	Model Number	MCD2500	Model Number	MCD3500
	Power Requirements	208-240VAC, 1 Ph		208-240VAC, 1 Ph
	Power Consumption	2400W (max rating)		3500W (max rating)
	BTU Comparison	22,000 BTU		31,000 BTU
	Voltage	208-240VAC, 50/60 Hz		208-240VAC, 50/60 Hz
	Amperage	10A (max)		17A (max)
	Power Range	100-2400W		100-3500W
	Temperature Range	85-500°F / 30-260°C		85-500°F / 30-260°C
	Dimensions (in)	13.75" x 13.75" x 3.7"		13.75" x 13.75" x 3.7"
	Dimensions (mm)	349 x 349 x 93		349 x 349 x 93
	Cutout Dimensions (in)	13.125" x 13.125"		13.125" x 13.125"
	Cutout Dimensions (mm)	333 x 333		333 x 333
	Weight	15 lbs / 6.8 kg		15 lbs / 6.8 kg
	Packaged Weight	18 lbs / 8.2 kg		18 lbs / 8.2 kg
	Packaged Dimensions (in)	20" x 20" x 9"		20" x 20" x 9"
	Packaged Dimensions (mm)	508 x 508 x 229		508 x 508 x 229
	Power Cord Length	6 ft / 1.8 m		6 ft / 1.8 m
	Plug Type	Country Specific		Country Specific
	Remote Control Box Cord Length	42" / 1.07 m		42" / 1.07 m
	Warranty	3 years parts and one year labour		

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

Phone: 1300 79 1954
Fax: 07 3345 6403
Email: cooktek@stoddart.com.au

Brisbane - Melbourne - Sydney - Perth - Adelaide

Australian distributor:
Stoddart Food Service Equipment
www.stoddart.com.au