



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear door
- Deck forced refrigeration
- Double glazed glass ends
- Two adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Pull down night blind

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)	100 X 100	
BTGOR6	600	750	1380	2+BASE	490X290	490X380	NA	545X515	35	

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents






Refrigerant	Operating Current	Connection	Voltage
R134A	3.3 Amp	10amp 3 pin plug	50/60 Hertz 240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature 25°C @ RH 55

Maximum shelf load weight 15kg
spread evenly

All units rear venting

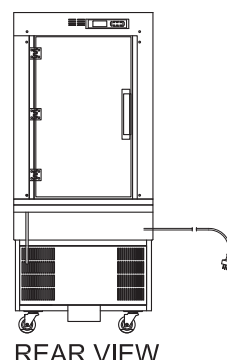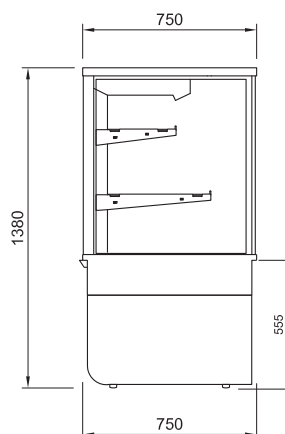

REAR VIEW



Download C.A.D models or contact us on COSSIGA.COM