


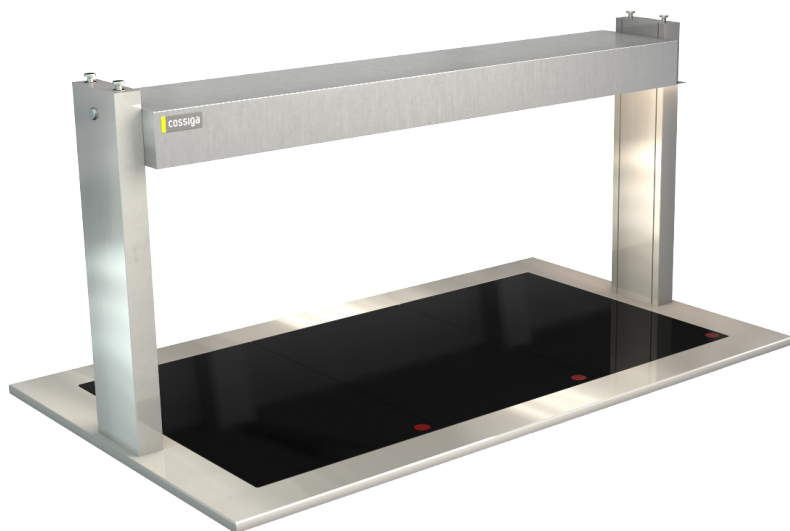

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Thermostatically controlled
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM3	1145	690	555	1085x600	Ceramic Glass	15 Amp	20 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents


* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.


ELECTRICAL POWER

Electrical power cord 3000mm
1 phase connection required.


Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.

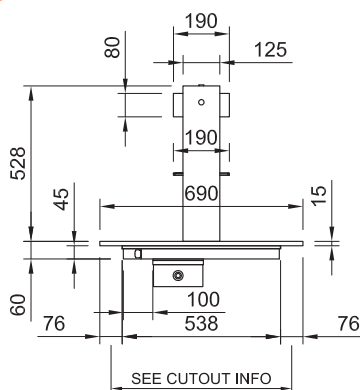


left side

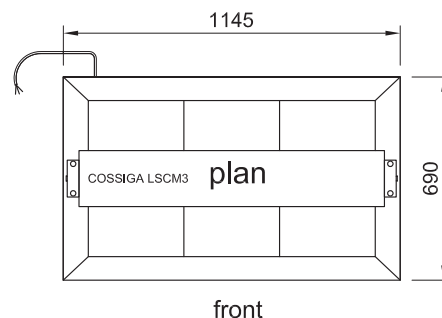

front



front

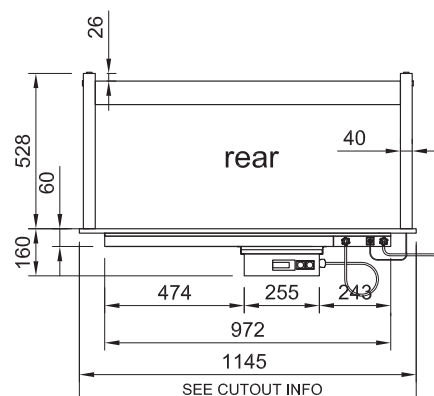

rear

