


## 1800 mm Refrigerated Food Display

**Series:** ActiveView  
**SKOPE ID:** F18Roo  
**Dimensions:** 1800 mm (W) × 750 mm (D) × 1300 mm (H)  
**Capacity:** 732 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

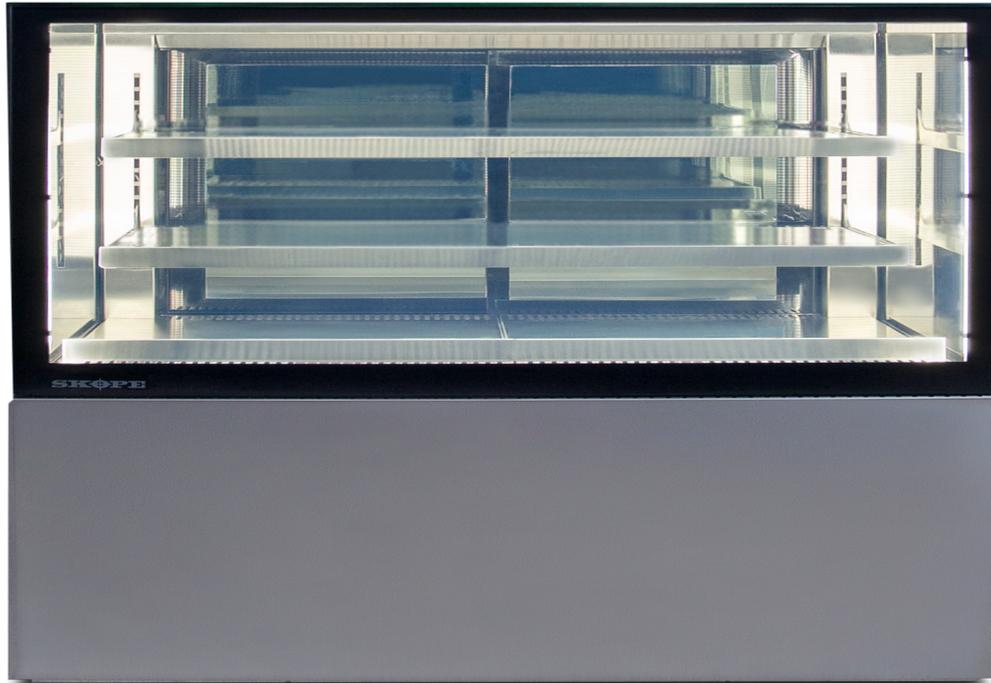

A premium 1800 mm wide refrigerated food display merchandiser designed for hospitality spaces requiring high-impact presentation and temperature control, such as cafés, petrol and convenience, and retail. The fridge is engineered and certified to safely store food from 1°C to 4°C. Temperatures are also adjustable via the SKOPE-connect smartphone app, including a dedicated setting for controlled ambient (15°C to 18°C). The frameless double-glazed glass display is heated to minimise condensation and maximise product visibility. The fridge is supplied with glass shelves on low-profile stainless steel arms as standard, with stainless steel wire shelves as an optional accessory. The shelving is height-adjustable and can be tilted with upstands and ticket holders on the front edge. Each shelf is fitted with LED light strips to highlight the food on display while additional full-height lighting ensures optimum visibility. All lighting can also be dimmed and set to automatically turn on or off to save energy. Access to the fridge is via two fully removable double-glazed sliding doors that stay open over 75 mm, and auto-soft-close at 75 mm and less. At 1300 mm height on castors, the cabinet has a convenient serve-over height. The removable side and front base panels support seamless integration into shopfitting designs. Constructed with an energy-efficient, rear breathing R290 removable refrigeration cartridge, allowing the unit to be fully enclosed on the front and sides, the fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology




Natural Refrigerant



GEMS



SKOPE-connect

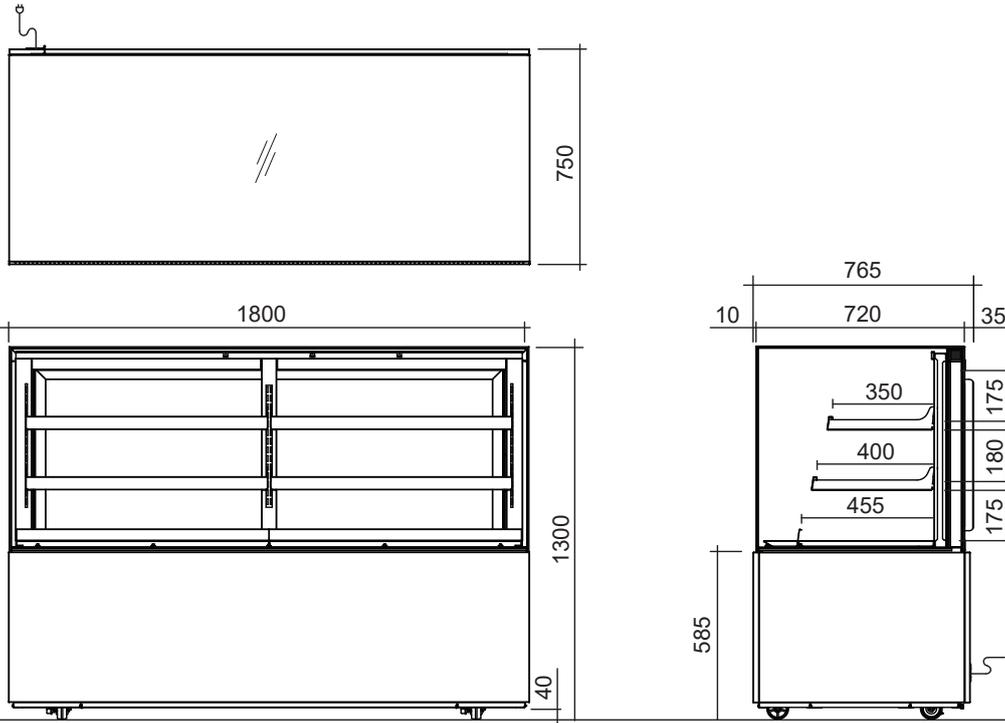

### Cabinet

<b>Type</b>	Refrigerated		
<b>Finish</b>	304 AISI stainless steel and black, screen-printed glass		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	40	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Glass sliding door (double-glazed, argon-filled, low-e, internal side mirrored)	
	Opening Size	Height (mm)	590
		Width (mm)	780
<b>Shelving</b>	2 × adjustable height half width top shelf (830W × 350D), 2 × adjustable height half width middle shelf (830W × 400D), 1 × solid bottom shelf (1760W × 450D)		
<b>Lighting*</b>	Interior	1 × 1600 mm 22.7 W top light, and 2 × 580 mm 8.2 W side lights	
	Shelving	4 × 700 mm 9.9 W undershelf lights	

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	1800	1760	1860
<b>Depth (mm)</b>	750	635	790
<b>Height (mm)</b>	1300 (castors) 1295 to 1380 (legs) 1260 (plinth mount)	655	1600
<b>Weight (kg)</b>	280		TBC
<b>ANSI Volume (L)</b>	732		
<b>Footprint (m<sup>2</sup>)</b>	1.35		

### Ventilation (mm)

<b>Top</b>	Not required	<b>Sides</b>	Not required	<b>Rear</b>	500
------------	--------------	--------------	--------------	-------------	-----

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

### Performance

<b>Product Temperature Range (°C)*</b>	1 to 4
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Power Level (dB(A))</b>	62.7

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	8
<b>Product Temperature Class</b>	M1
<b>Total Energy Consumption</b>	5.80 kWh/24 h
<b>Annual Running Costs</b>	\$635 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220 to 240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2.5 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	7.0

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	28		
<b>Refrigerant/Charge</b>	R290/99 g		
<b>Nominal Capacity (W)</b>	680		
<b>Heat Rejection (W)</b>	Average 240	Peak 310	
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		

\* Controllable via SCS Connect.



FDR.1800  
on the SKOPE website

