

Technical data sheet for

# SINGLE PAN GAS FRYER 400mm

FN8118G



- 400mm wide single pan fryer
- 90MJ multi-jet target burner
- 25kg / hr production rate
- Easy clean stainless steel open pan
- 18L oil capacity
- V-tank with cool zone
- 30mm drain valve
- Stainless steel exterior
- Easy service
- Fully modular

## Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 0.9mm 430 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 30mm drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 baskets and stainless steel lid supplied standard

## Controls

- Mechanical thermostat
- Thermostat range 80-190°C
- Over-temperature safety cut-out
- Millivolt gas valve system (no electrical supply)
- Flame failure protection

## Cleaning and Servicing

- Open stainless steel pan for easy clean
- Easy clean basket support bar
- 30mm drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

# Technical data sheet for SINGLE PAN GAS FRYER 400mm

## Specifications

### Production rate

25kg/hr

### Pan Size

Oil capacity 18L (32lbs shortening)

Width 305mm

Length 380mm

Oil frying depth 95mm

### Baskets

2 nickel plated wire baskets

140mm W x 335mm D x 145mm H

Nickel plated wire basket grid

### Burners

Multi-jet target U-burners

### Gas Power

90MJ/hr, 23.3kW

### Gas connection

R 3/4 (BSP) male

40mm from RH side, 24mm from rear,  
and 223mm from floor

All units incorporate Natural and LP gas regulator

### DIMENSIONS

Width 400mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

### NETT WEIGHT

57kg

### PACKING DATA

0.54m<sup>3</sup>, 97kg

Width 870mm

Depth 495mm

Height 1255mm

### GAS TYPES

Available in Natural gas and LP gas

Please specify when ordering

Other gas types on request

### OPTIONS AT EXTRA COST

Extra baskets

Side splash guards


Joining caps

Castors

Plinth mounting

Gas conversion kits

FN8118G

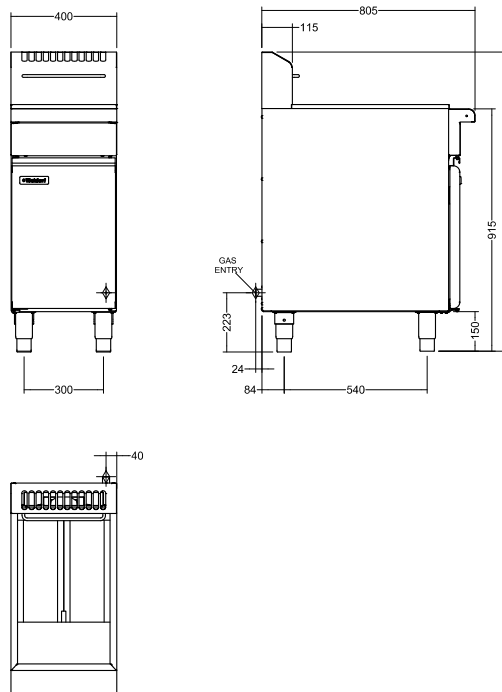

**Waldorf**  
800 SERIES

**MOFFAT**

Australia  
[www.moffat.com.au](http://www.moffat.com.au)  
New Zealand  
[www.moffat.co.nz](http://www.moffat.co.nz)

Australia  
Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales  
Telephone 02-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
Telephone 03-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
Telephone 07-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
Telephone 08-9202 6820  
[bgarcia@moffat.com.au](mailto:bgarcia@moffat.com.au)

New Zealand  
Moffat Limited

Christchurch  
Telephone 03-389 1007  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland  
Telephone 09-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by

**MOFFAT**

ISO9001  
All Waldorf products are designed and  
manufactured by Moffat using the  
internationally recognised ISO9001 quality  
management system, covering design,  
manufacture and final inspection, ensuring  
consistent high quality at all times.



In line with policy to continually develop and  
improve its products, Moffat Limited reserves  
the right to change specifications and design  
without notice.

Printed in New Zealand  
© Copyright Moffat Limited  
Moffat/08.13/1357

