





RF

GOG RF9
GOG RF12
GOG RF15







All glass Heated - fully tropicalized cabinet






- Double glazed, condensation free, glass on glass construction
- Sliding double glazed rear doors argon filled
- Deck forced refrigeration
- Double glazed with painted edges
- Adjustable shelf
- Ticket strips on shelf and deck
- Undershelf and canopy LED lights
- Integral condensor, self evaporating
- Second shelf optional





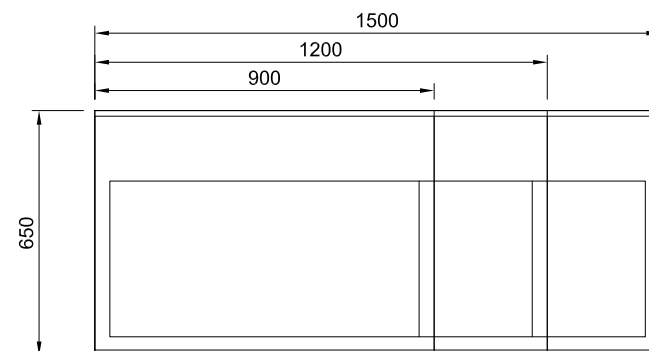
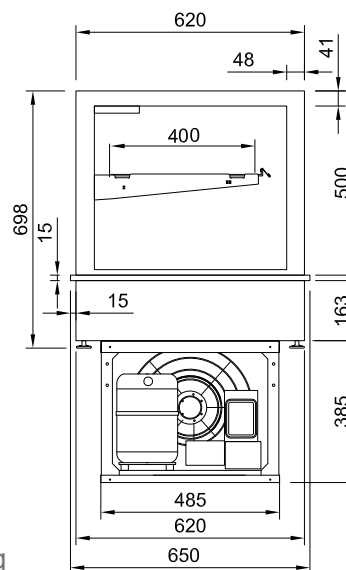



CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET				SHELVING		REFRIGERANT	TOTAL FOOD	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING				
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	CUT OUTS	NO.	SIZE W X D		100MM UNITS				LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUBE
GOGRF9	900	650	698	915x620	1+BASE	790 X 410	134A	72	4.6AMP	10AMP 3 PIN PLUG	220~240V	1000	730	1220	142	0.89
GOGRF12	1200	650	698	1215x620	1+BASE	1090 X 410	134A	99	5.4AMP	10AMP 3 PIN PLUG	220~240V	1300	730	1220	170	1.16
GOGRF15	1500	650	698	1515x620	1+BASE	1390 X 410	134A	126	6.0AMP	10AMP 3 PIN PLUG	220~240V	1600	730	1220	195	1.43

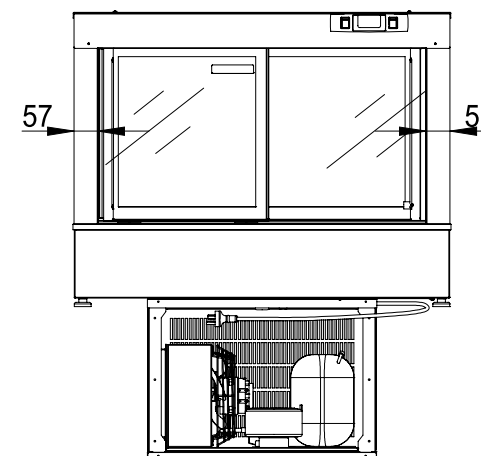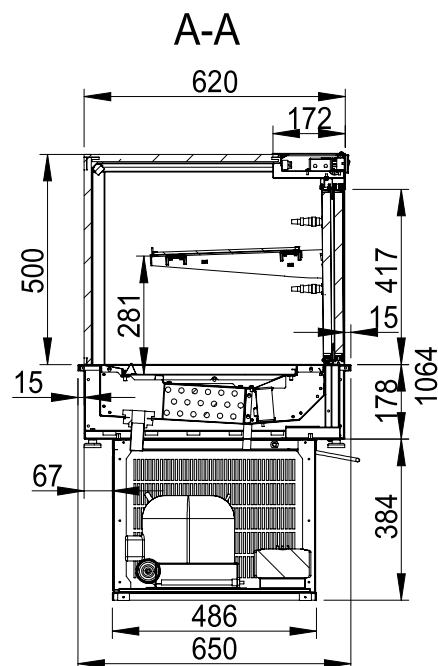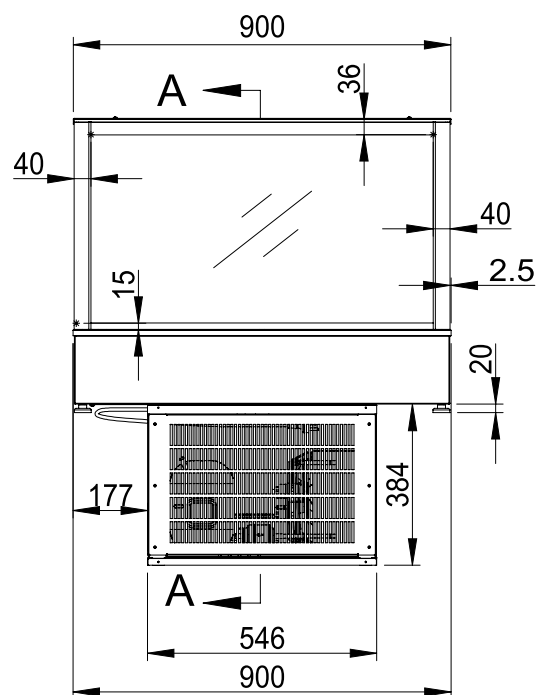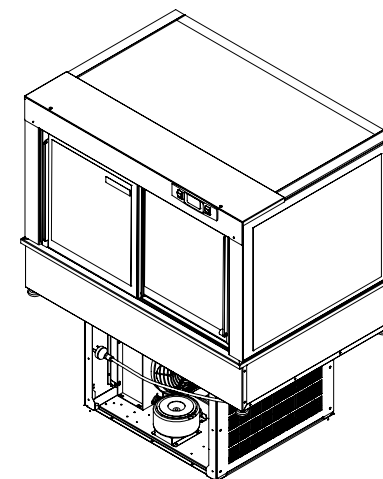
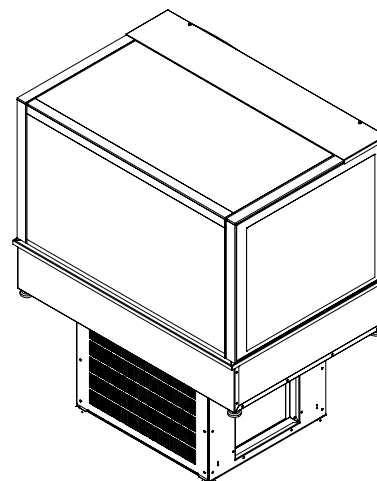
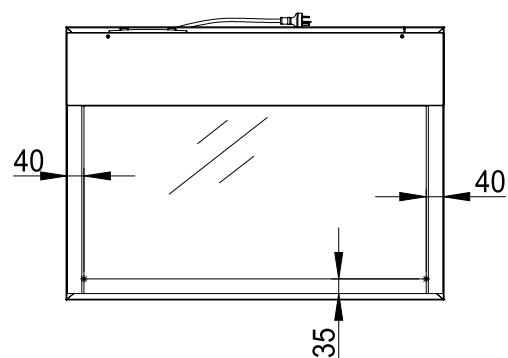


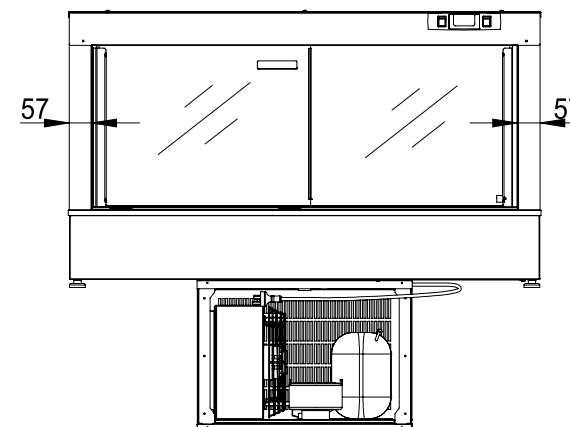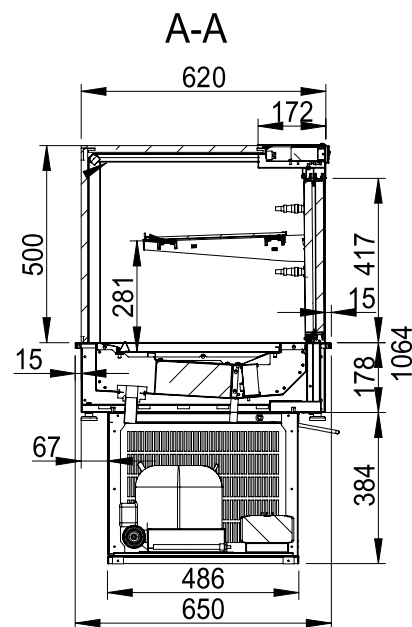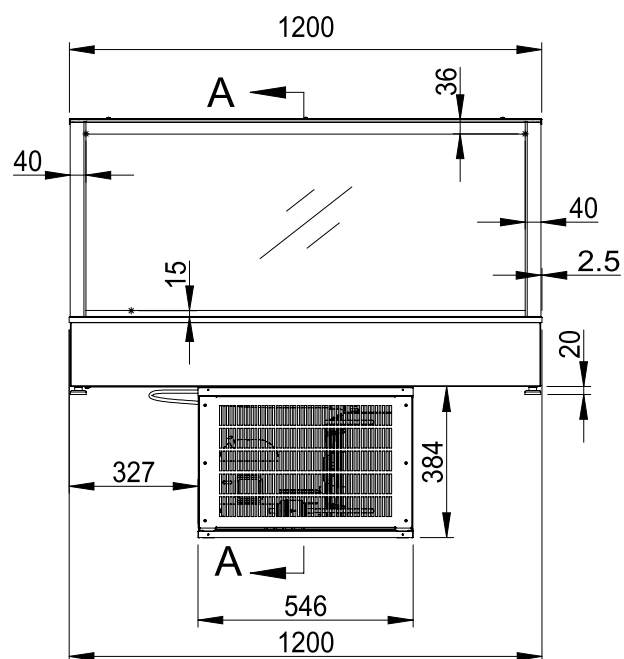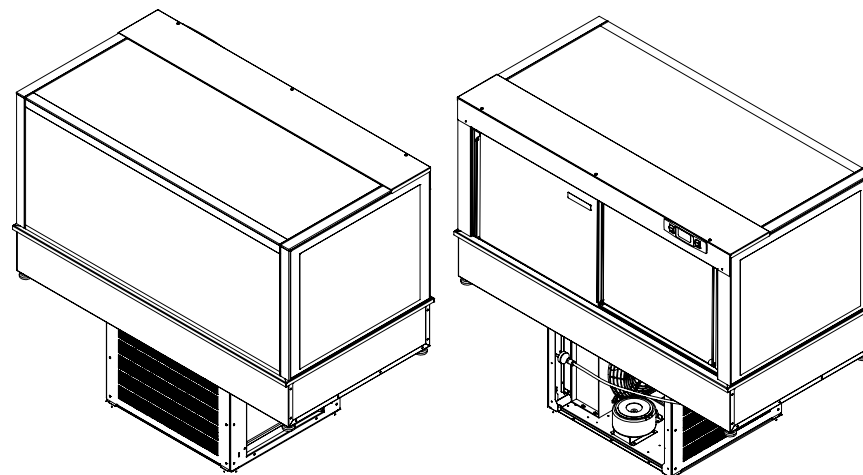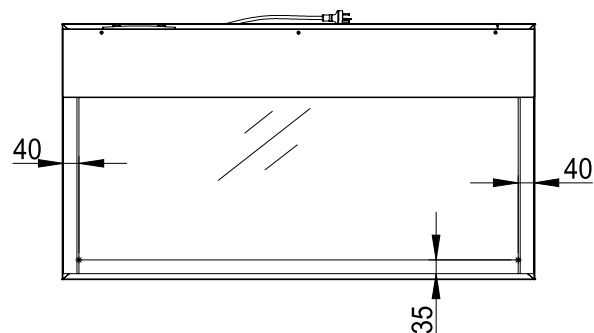

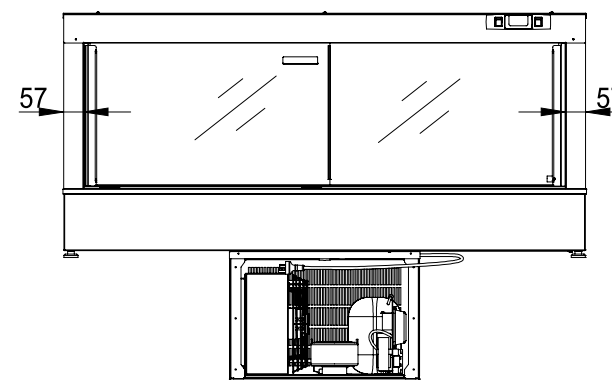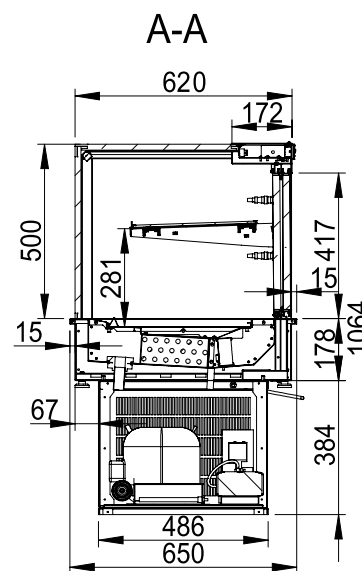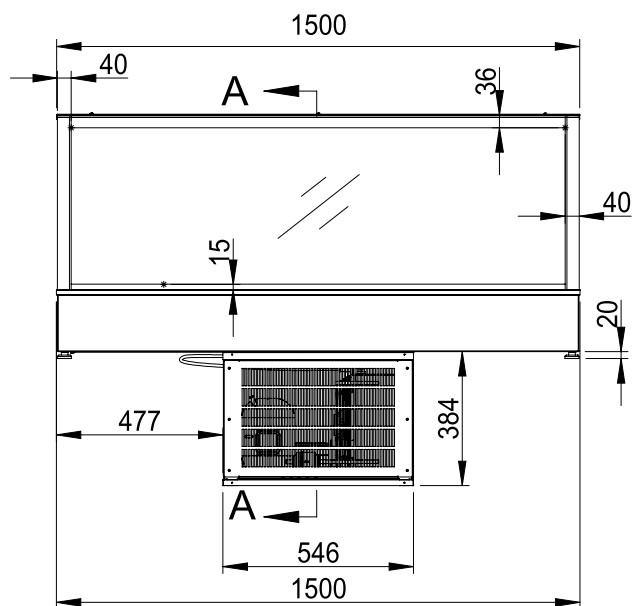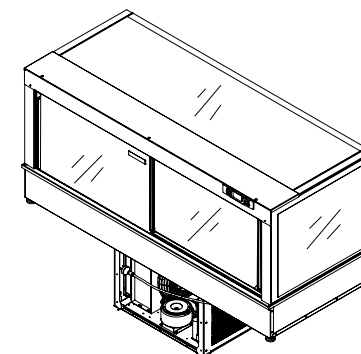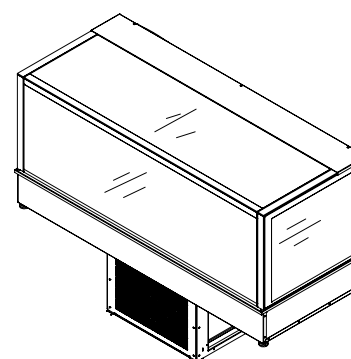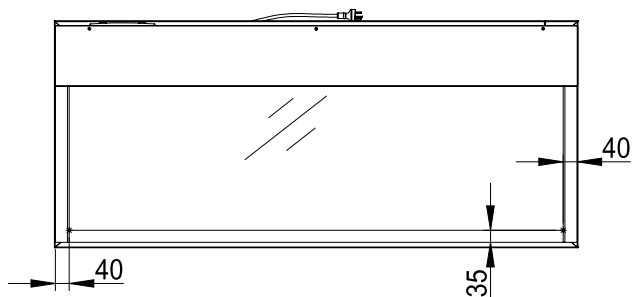

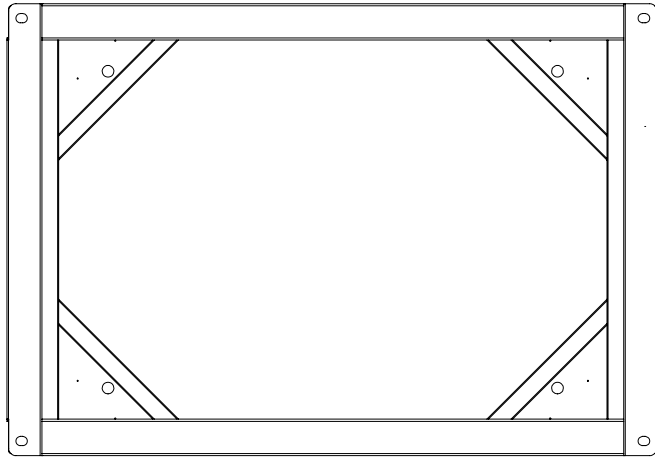


Fixing for side and front panels

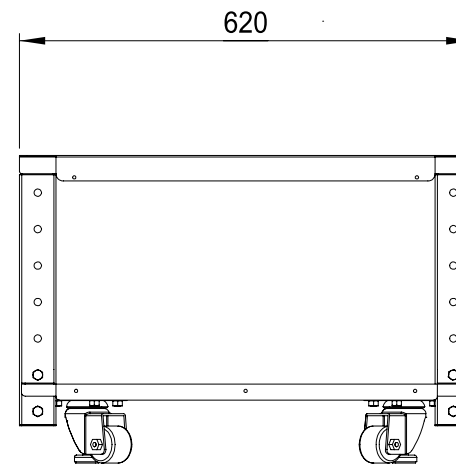
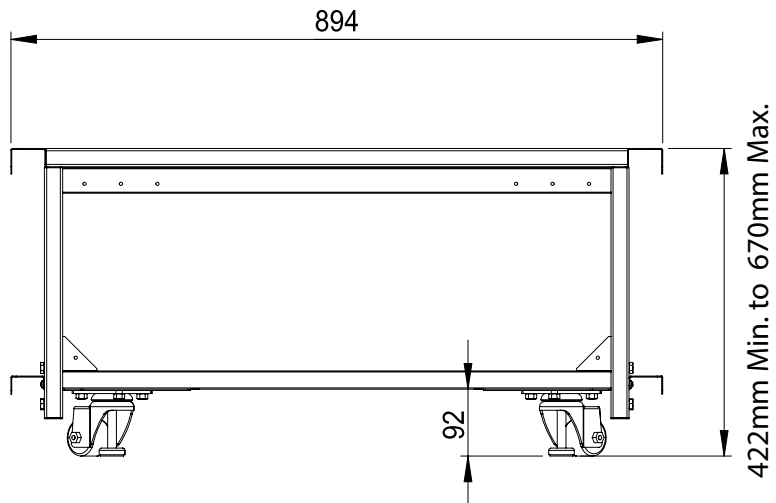
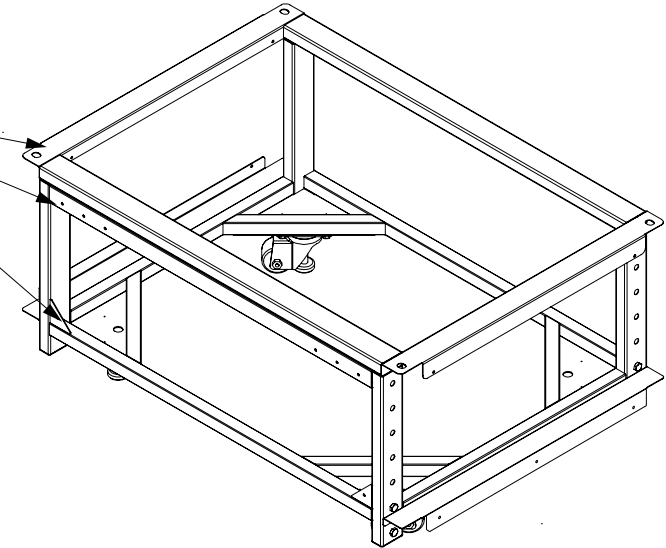


Height adjustable in 50mm increments

Minimum height 422mm
Maximum Height 670mm

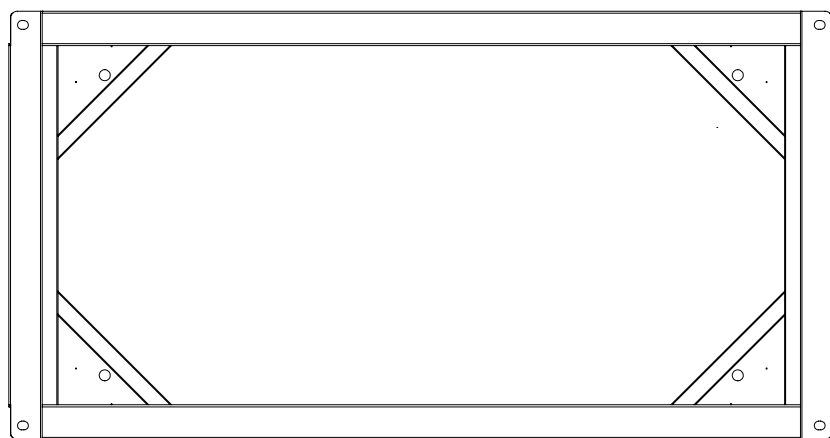


Fixing for side and front panels

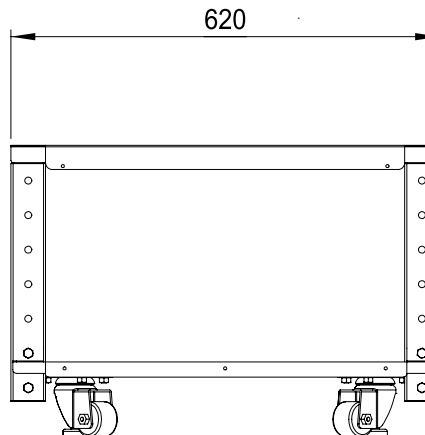
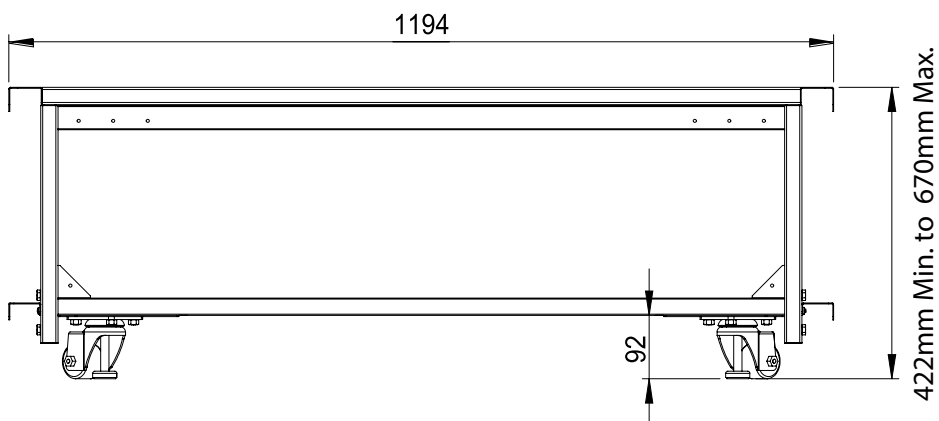
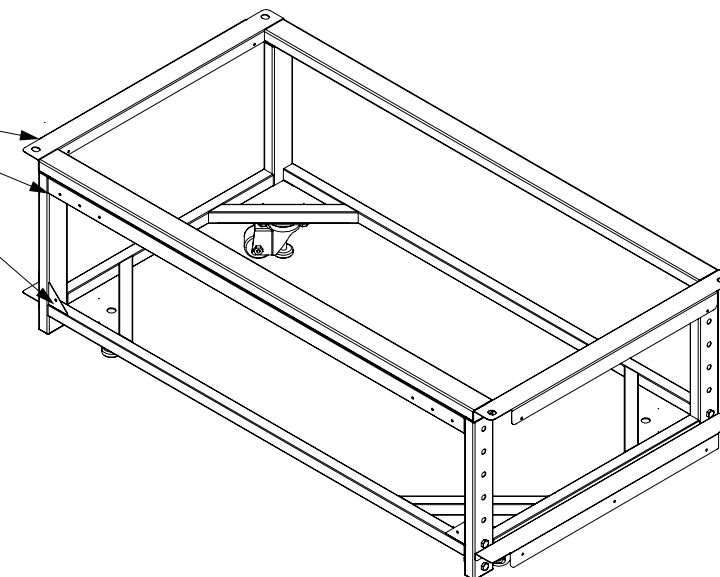


Height adjustable in 50mm increments

Minimum height 422mm
Maximum Height 670mm



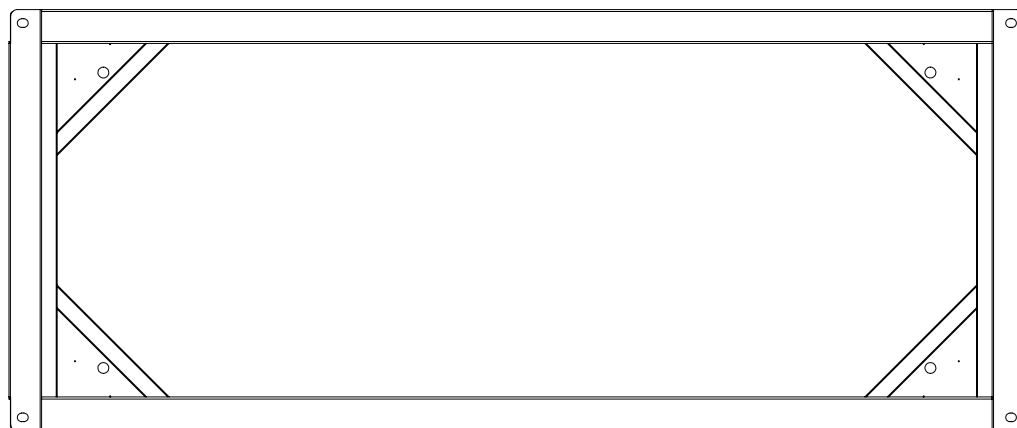


Fixing for side and front panels

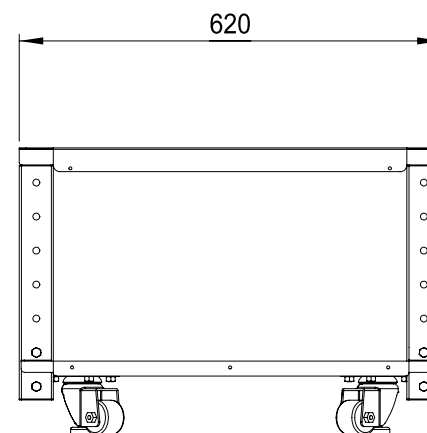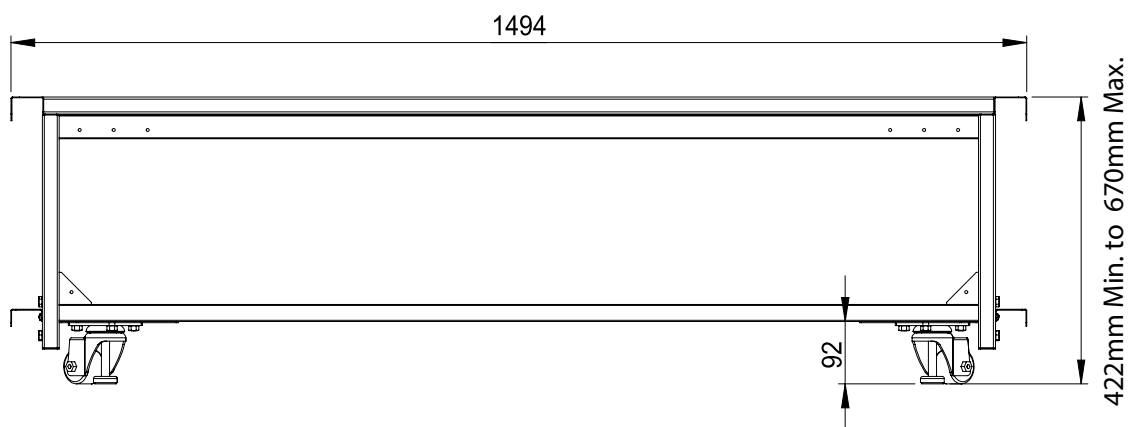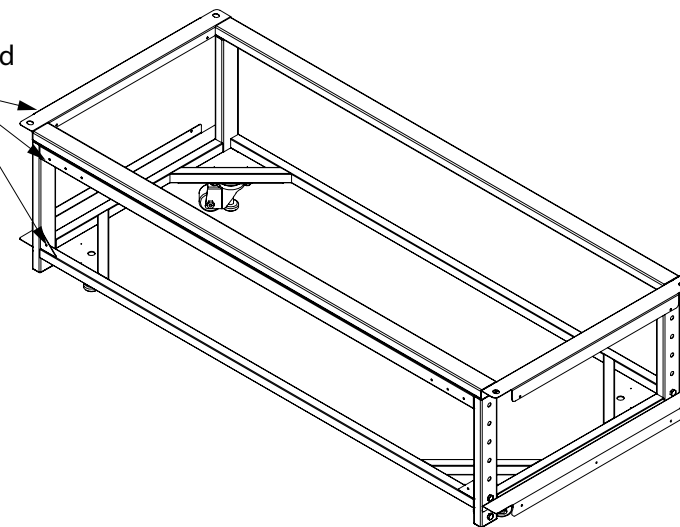


Height adjustable in 50mm increments

Minimum height 422mm
Maximum Height 670mm

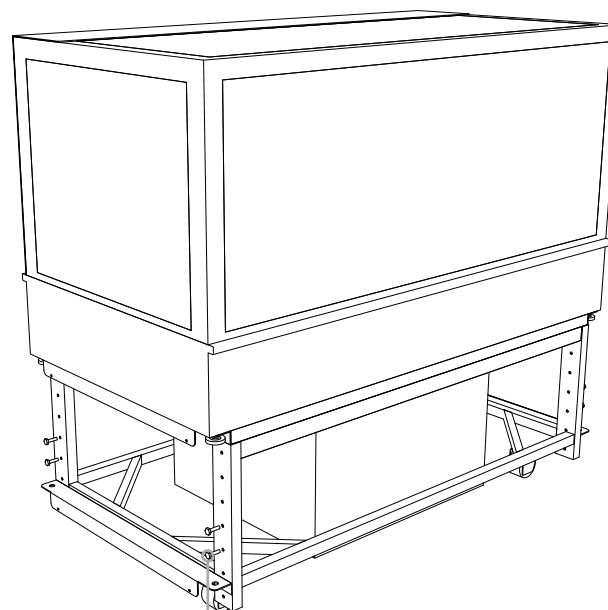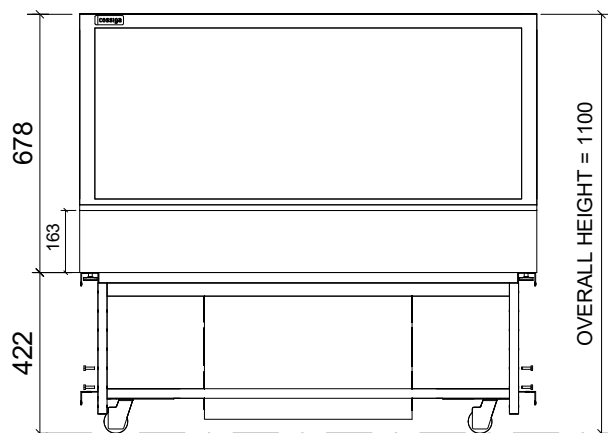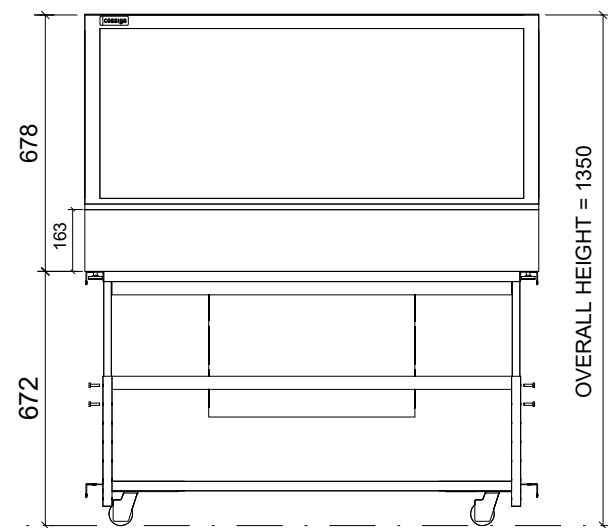

Adjustment
bolts



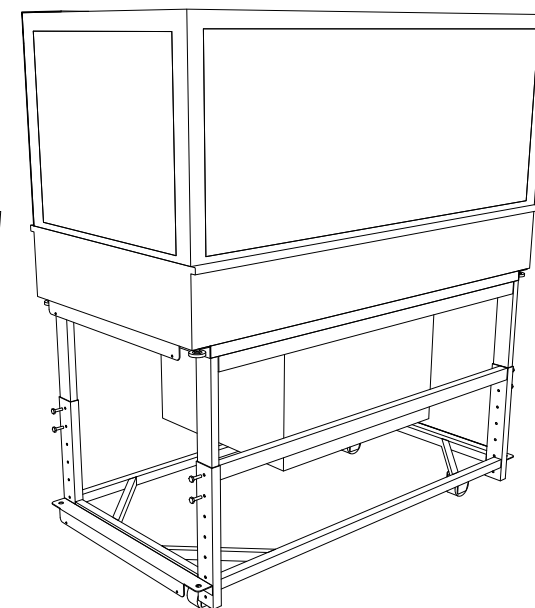


Height adjustments

Height adjustable in 50mm increments

Minimum base height 422mm
Maximum base Height 670mm


Minimum overall height 1100 mm
Maximum overallHeight 1350mm

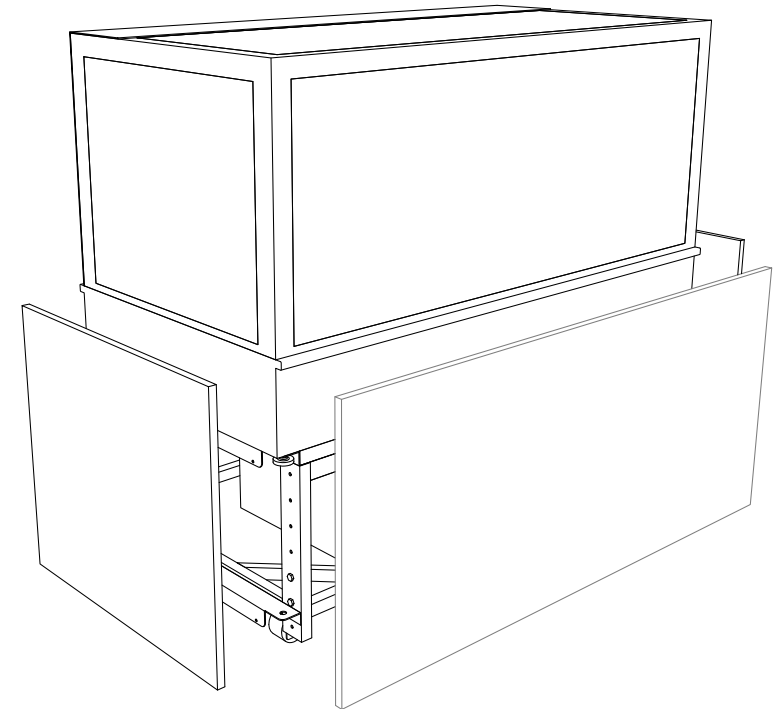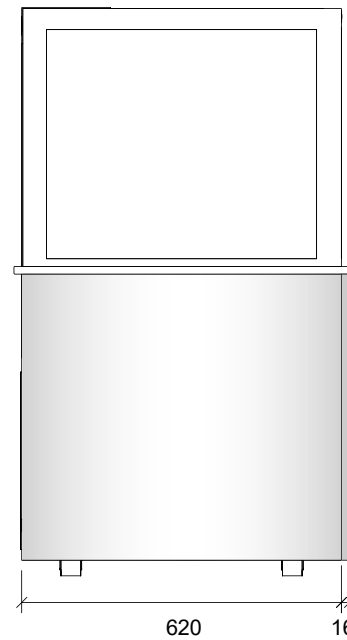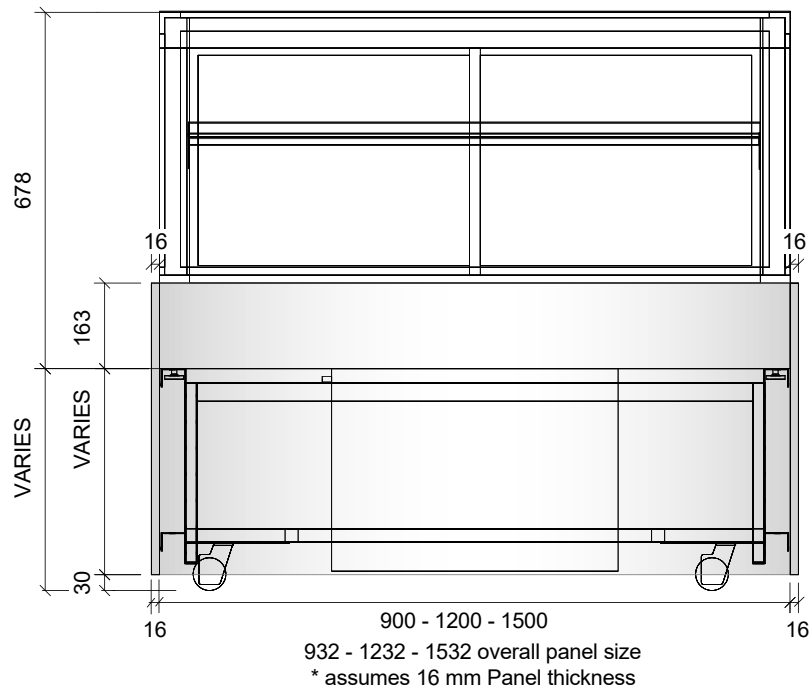


Panels

Front and side panels attached to base trolley frame with rear screw fixing.

Panel height will vary depending on the desired overall height.

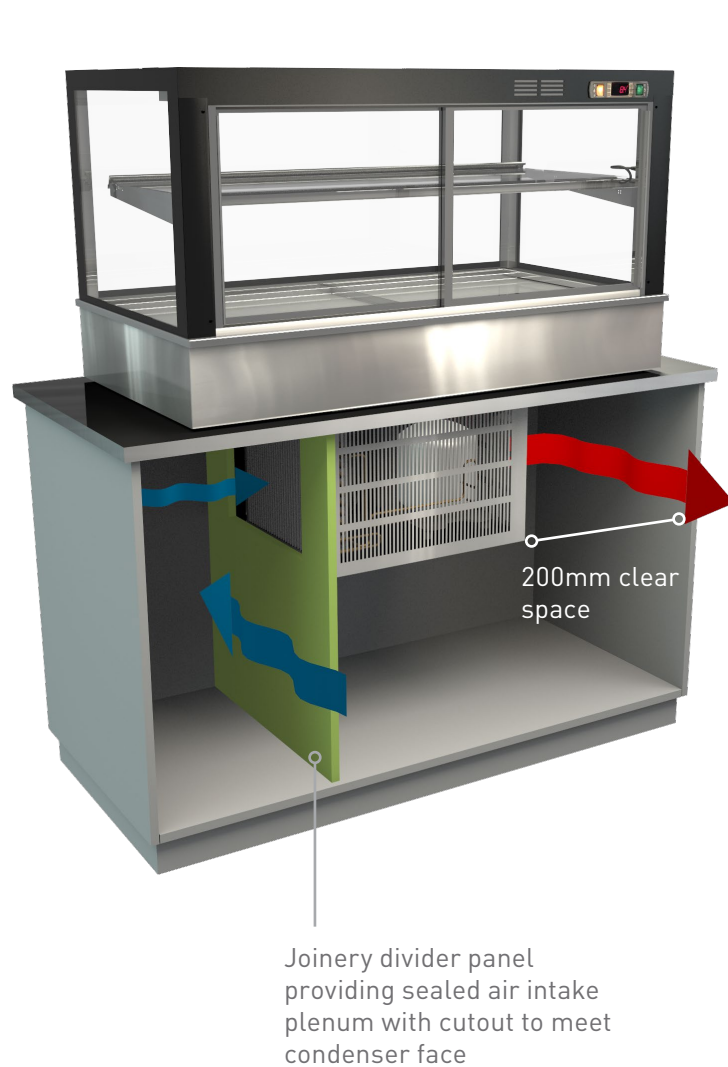




Ideal configuration cabinet open at rear

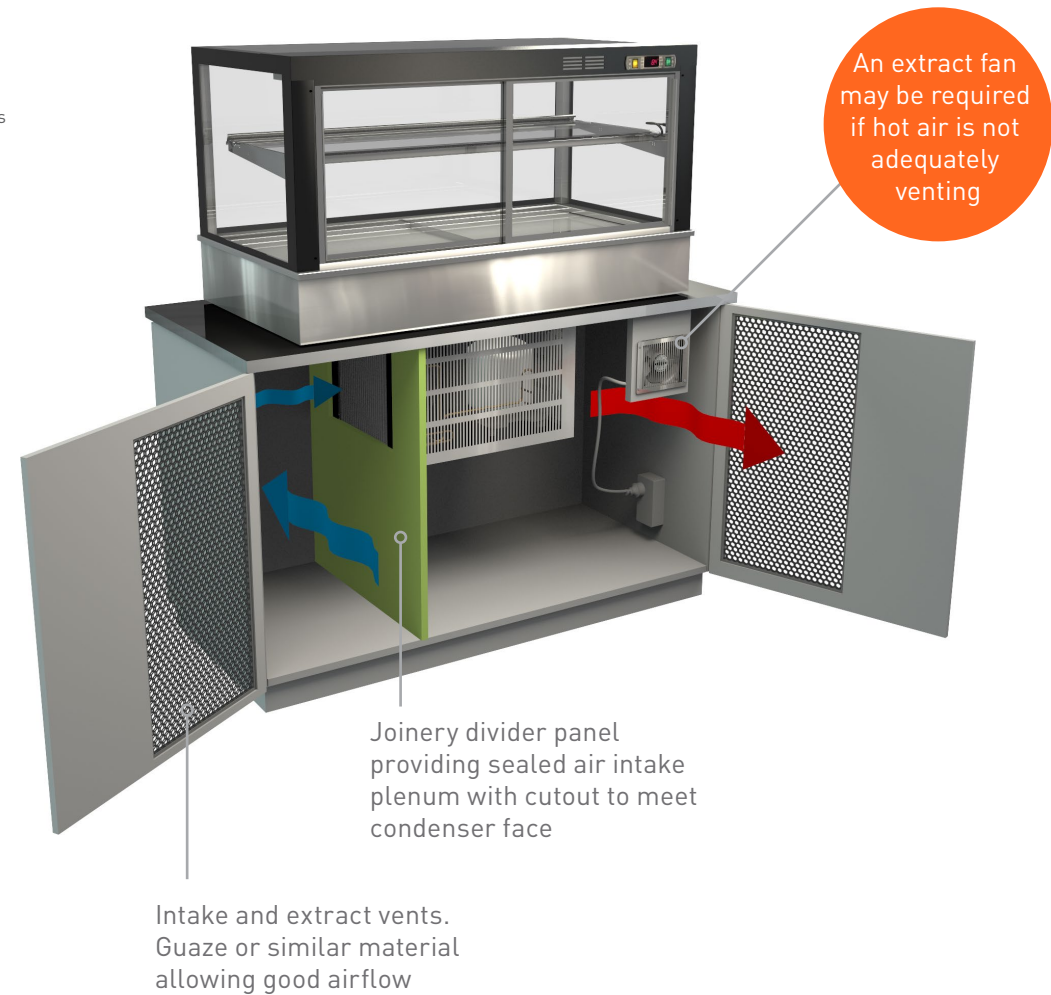


Cabinet with vented rear doors


EXTRACTION FAN

- Extract hot air from box joinery
- Fan and power cable supplied, screw fixed to joinery
- Electrical power cord 2000mm 3 pin 10 amp 1 phase socket required
- Fan 230v ~ 50Hz - 60Hz - 19 Watt in stainless steel case

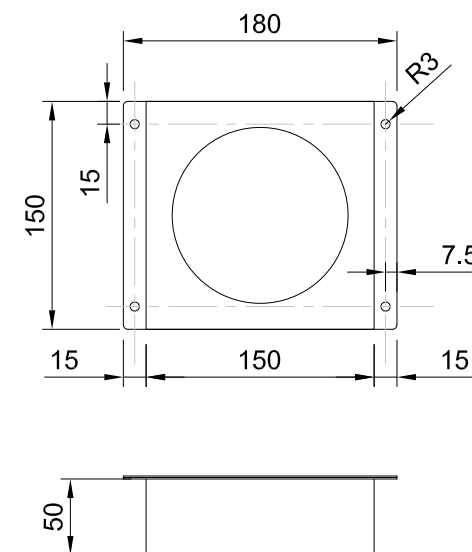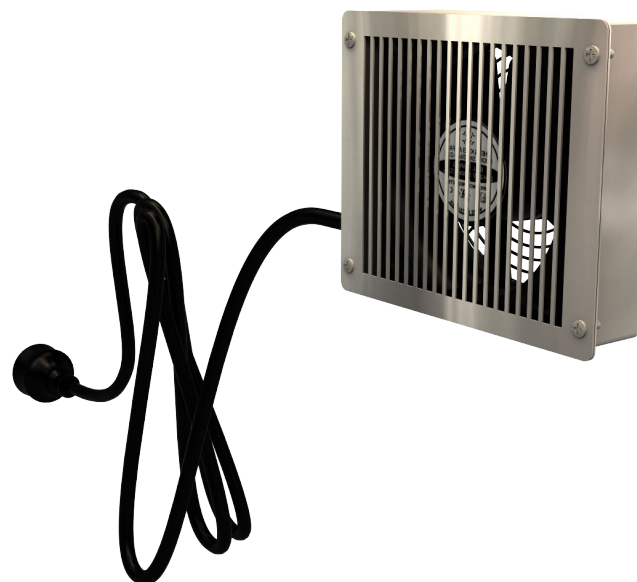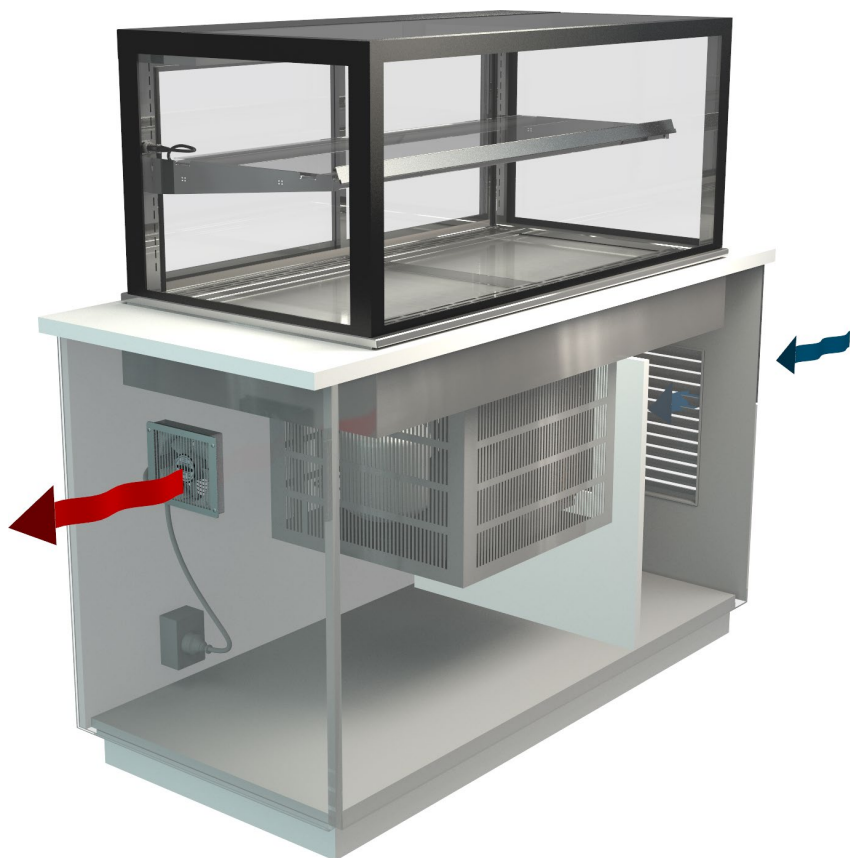


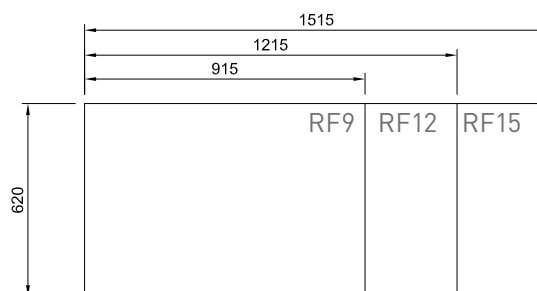


benchtop cut out sizes

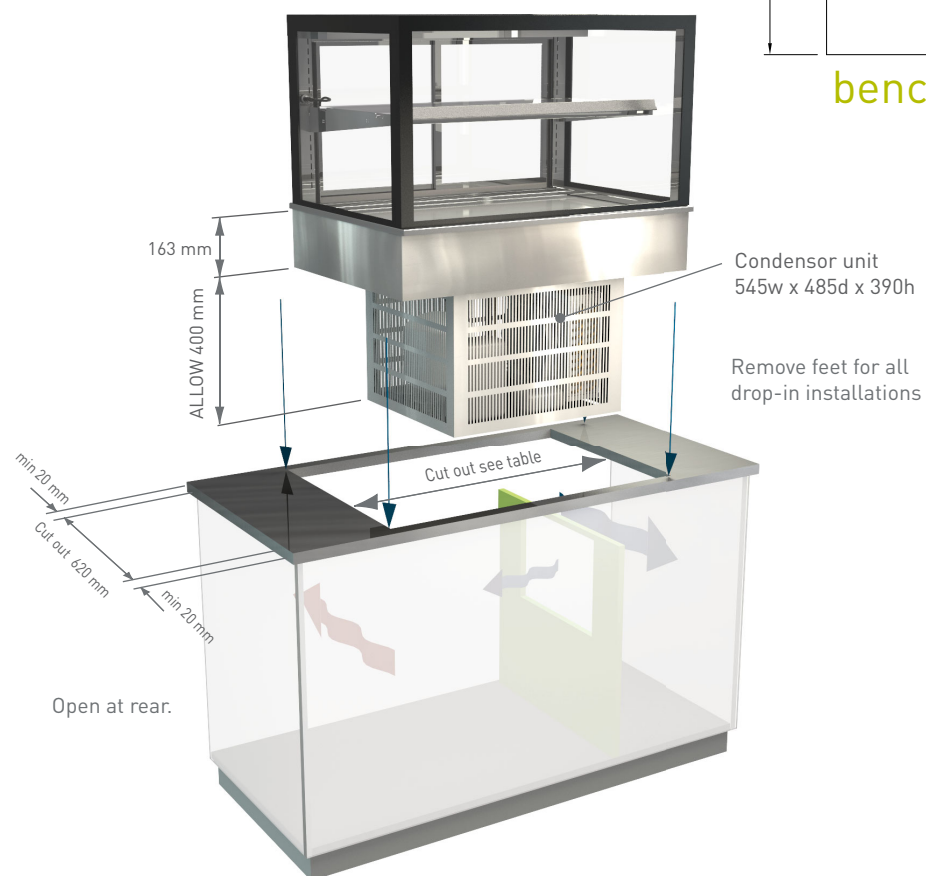

Full bench top drop in

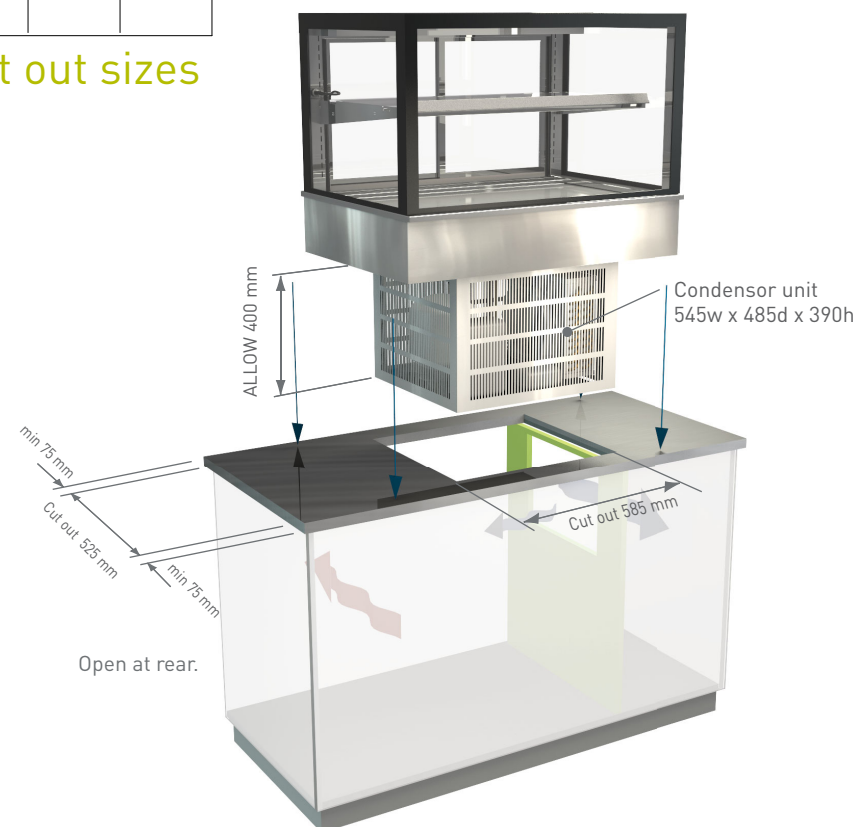


On bench top drop in

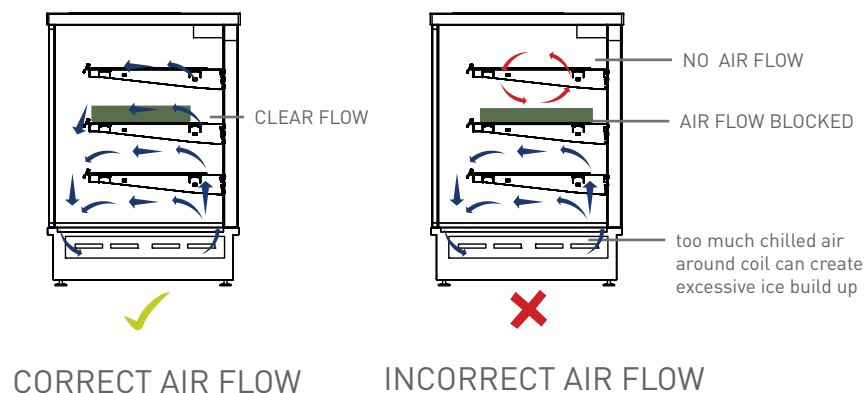

Blocked air flow will retard operation on both HOT and COLD units

Ensure trays or plates are not blocking air flow at rear

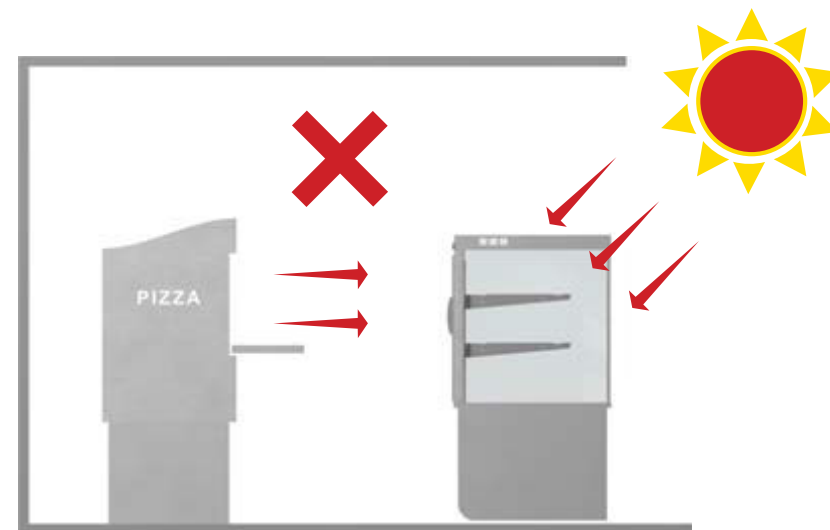

Heat from other equipment and natural conditions can cause cooling failures and overheating of compressors

Locations to avoid are :

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high cross wind area
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas