



HYDROTAP G5 BCSHA100 CELSIUS ALL-IN-ONE ARC CHROME

 **BOILING**

 **CHILLED**

 **SPARKLING**

 **HOT & AMBIENT**

FILTERED

UNFILTERED

Order Code H57763Z00AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder. Easy to install integrated ventilation tray included.



Manufacturing Code	H57763Z00AU
Capacity	Commercial
Number of people	61-100
Boiling Cups per hour	240
Combined Chilled and Sparkling Cups per hour	175

Tap	Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Chrome)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)

Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	2.15kW 220-240V 50Hz
Booster Power Rating	Zip HydroTap Booster 2.2kW 220-240V 50/60Hz
Power Supply	2 x 10 Amp socket outlets
Dimensions	W395mm x D487mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 6.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements


1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail


Ventilation requirements

Contact your local service provider if ventilation is not suitable

Option 1. Cupboard with 40mm min overhang


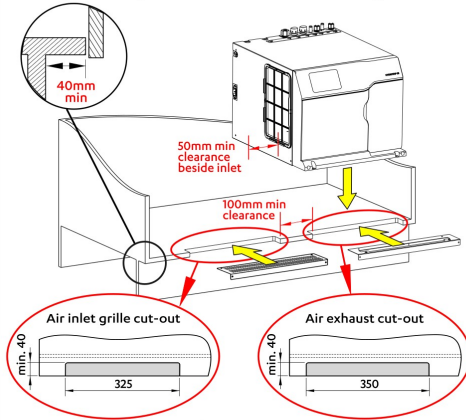


Option 2. Cupboard with less than 40mm overhang

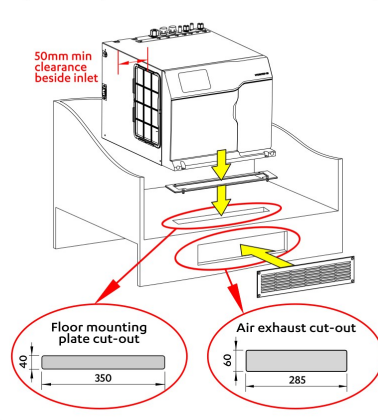

Tap Positioning


Position the Tap to dispense into the sink.

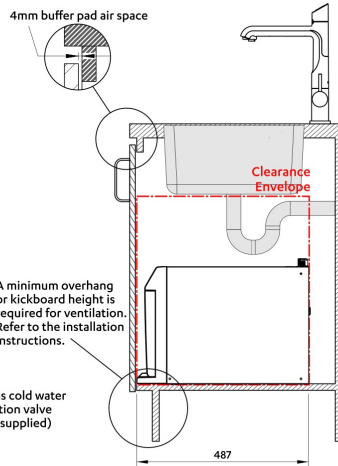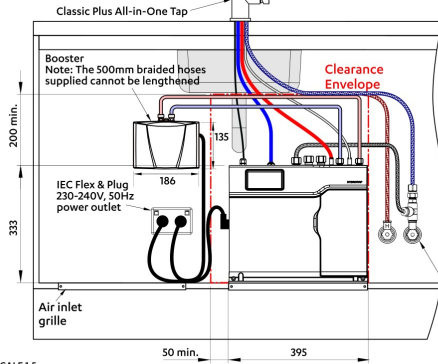


SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap Tap options

Classic All-in-One Tap




Classic Plus All-in-One Tap



Mains hot water supply installation


Hot and cold water supply required

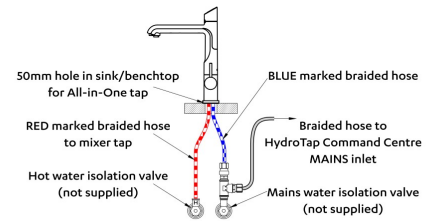


HydroTap G5 BC100

shown with Classic Plus All-in-One Tap


Tap Detail

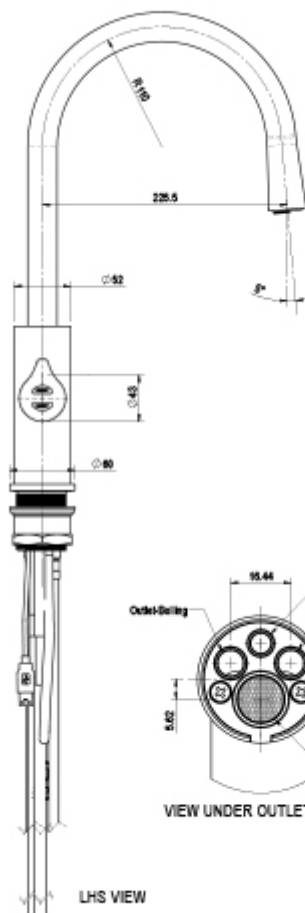


LHS VIEW



VIEW UNDER OUTLET NOZZLE

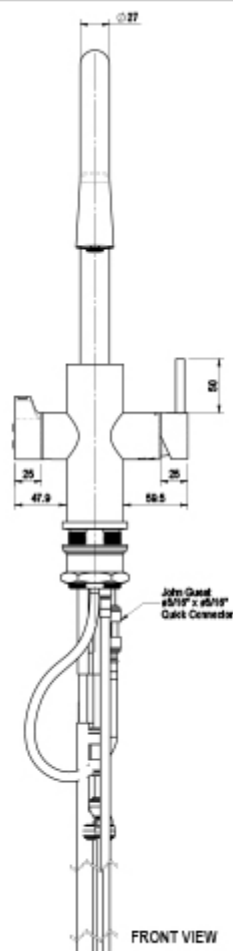

FRONT VIEW

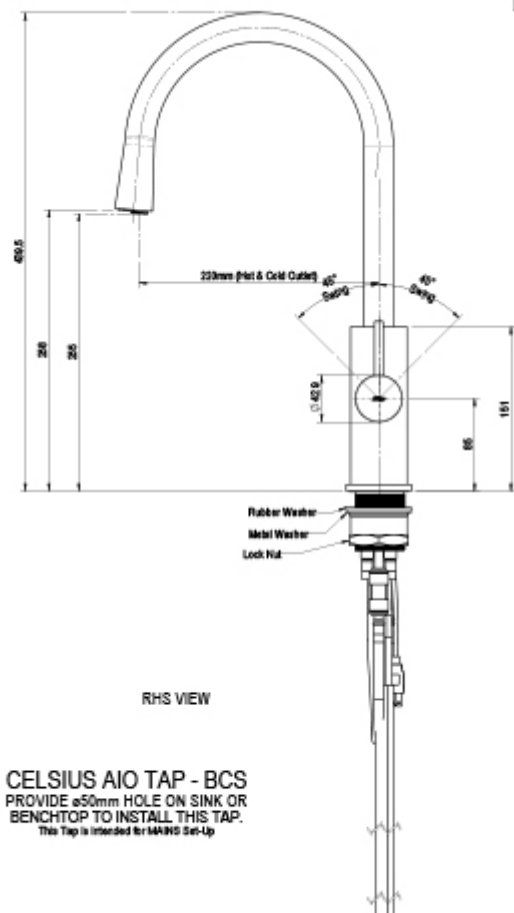

RHS VIEW

CELSIUS AIO TAP - BCS
 PROVIDE ø50mm HOLE ON SINK OR
 BENCHTOP TO INSTALL THIS TAP.
 This Tap is intended for MAINS Set-Up

805105