

Technical data sheet for

# INDUCTION RANGE CONVECTION OVEN 900mm

IN8410ECR3 - GN 2/1 ELECTRIC CONVECTION OVEN WITH 4 X 3.5KW ROUND INDUCTION


IN8410ECR5 - GN 2/1 ELECTRIC CONVECTION OVEN WITH 4 X 5.0KW ROUND INDUCTION

IN8410ECR5F - GN 2/1 ELECTRIC CONVECTION OVEN WITH 2 X 5.0KW ROUND AND 2 X 5.0KW FULL AREA INDUCTION



IN8410ECR3/R5

IN8410ECR5F

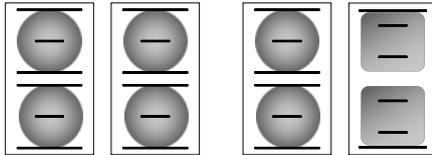

- Heavy-duty construction
- Four Induction zones
- R3 4 x 3.5kW Round Induction zones
- R5 4 x 5.0kW Round Induction zones
- R5F 2 x 5.0kW Round / 2 x 5kW Full Area Induction
- Automatic pan detection
- GN 2/1 6.1kW electric convection oven
- Dual oven circulation fans
- Drop down door
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

## Induction Zone Options

- R3 - 4 x 3.5kW Round Induction
- R5 - 4 x 5kW Round Induction
- R5F - 2 x 5kW Round induction / 2 x 5.0kW Full Area Induction

## Series Options

- IN - Standard splashback models
- INL - Low back models
- INB - Bold vitreous enamel colour front finish on standard splashback models
- INLB - Bold vitreous enamel colour front finish on low back models

## Overall Construction

- Galvanized steel chassis
- Welded hob with 2.0mm 304 stainless steel top
- Splashback and hob sides 1.2mm 304 stainless steel
- Front panels and oven sides 0.9mm 304 stainless steel
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet

### COOKTOP

- Two 6mm thick ceramic glass 375mm x 650mm each
- Induction air cooling with front access air filter
- Fan cooled induction cooktop oven heat protection with front exhaust

### OVEN

- Fully welded and vitreous enamelled oven liner
- GN 2/1 capacity with 5 position racking
- Heavy-duty easy remove heavy wire chrome rack supports
- Vitreous enamelled removable oven spill tray

- 6.0kW heating elements
- 2 fan motors
- Drop down door
- 0.9mm 304 stainless steel door outer
- 1.0mm vitreous enamelled door inner
- 38mm high density fibreglass insulated
- Supplied with two chrome wire oven racks

## Controls

### INDUCTION COOKTOP

- Variable power controls for each induction zone
- Heating ON indicator lights with pan detection indication
- Error mode indicator

### OVEN

- 50-320°C thermostatic control
- Indicator lights for power and heating
- Oven fans and heating automatic off when door open

## Cleaning and Servicing

- All models with easy clean stainless steel external finish
- Fully sealed cooking surface
- Removable for cleaning cooling air filter
- Removable for cleaning exhaust screen
- Removable oven racking and spill tray
- Easy clean vitreous enamel oven and door inner
- Access to all service parts from front of unit

Technical data sheet for

# INDUCTION RANGE CONVECTION OVEN 900mm

**IN8410ECR3 - GN 2/1 ELECTRIC CONVECTION OVEN WITH 4 X 3.5KW ROUND INDUCTION**

**IN8410ECR5 - GN 2/1 ELECTRIC CONVECTION OVEN WITH 4 X 5.0KW ROUND INDUCTION**

**IN8410ECR5F - GN 2/1 ELECTRIC CONVECTION OVEN WITH 2 X 5.0KW ROUND AND 2 X 5.0KW FULL AREA INDUCTION**

## Specifications

### COOKTOP

#### IN8410ECR3

4 x 3.5kW Ø 270mm Round Induction zones

#### IN8410ECR5

4 x 5.0kW Ø 270mm Round Induction zones

#### IN8410ECF

2 x 5.0kW Ø 270mm Round Induction zones (LH)

2 x 5.0kW Full Area Induction zones

### Oven

2 x 2kW oven fan elements

1 x 2kW oven bottom element

2 x oven circulation fan motors

### OVEN DIMENSIONS

Width 665mm

Depth 560mm

Height 350mm

Rack size 665mm x 530mm

Rack positions 5

### ELECTRICAL REQUIREMENTS

#### IN8410ECR3

20.1kW, 400-415V, 50/60Hz, 3P+N+E

28.5A / phase

#### IN8410ECR5

26.1kW, 400-415V, 50/60Hz, 3P+N+E

36.3A / phase

#### IN8410ECR5F

26.1kW, 400-415V, 50/60Hz, 3P+N+E

36.3A / phase

### ELECTRICAL CONNECTION

130mm from RH side, 30mm from rear, and 318mm from floor.

### DIMENSIONS

Width 900mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

Incl. low back 970mm

### NETT WEIGHT

168.5kg

### PACKING DATA

1.03m<sup>3</sup>, 235kg

Width 945mm

Depth 865mm

Height 1255mm



### OPTIONS AT EXTRA COST

Rear rollers (included standard)

Castors

Plinth mounting


IN8410EC



IN8410ECR3,  
IN8410ECR5



IN8410ECR5F



[moffat.com.au](http://moffat.com.au)  
[moffat.co.nz](http://moffat.co.nz)

Australia  
[moffat.com.au](http://moffat.com.au)

### Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales  
Telephone +612-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
Telephone +613-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
Telephone +617-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
Telephone +618-9413 2400  
[wasales@moffat.com.au](mailto:wasales@moffat.com.au)

### New Zealand

[moffat.co.nz](http://moffat.co.nz)

### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland  
Telephone +64 9-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.W8.01/23

an Ali Group Company



The Spirit of Excellence