


CABINET DIMENSIONS & SPECIFICATIONS

| MODEL | CABINET        |               |                | WEIGHT | BENCH TOP<br>CUT OUT<br>HOLE SIZE | TEMP<br>RANGE | DISPLAY<br>AREA | FREQUENCY | CURRENT WITH<br>OVERHEAD HEATING &<br>LEDS | POWER WITH<br>OVERHEAD<br>HEATING & LEDS | CONNECTION<br>ELECTRICAL POWER CORD<br>3000MM | VOLTAGE  | PACKED FOR SHIPPING |               |                |                |
|-------|----------------|---------------|----------------|--------|-----------------------------------|---------------|-----------------|-----------|--------------------------------------------|------------------------------------------|-----------------------------------------------|----------|---------------------|---------------|----------------|----------------|
|       | LENGTH<br>[MM] | DEPTH<br>[MM] | HEIGHT<br>[MM] | KG     |                                   | DEG C         | M2              |           | AMPS                                       | KW<br>230V                               | NZ/AUS/UK                                     |          | LENGTH<br>[MM]      | DEPTH<br>[MM] | HEIGHT<br>[MM] | WEIGHT<br>[KG] |
| LSCM2 | 805            | 690           | 555            | 65     | 775x672                           | 75-95         | 0.33            | 50 HZ     | 7.9                                        | 1.9                                      | 10 AMP 3 PIN PLUG (UK<br>13 AMP)              | 220-240V | 910                 | 770           | 410            | 76             |
| LSCM3 | 1145           | 690           | 555            | 65     | 1115x672                          | 75-95         | 0.51            | 50 HZ     | 11.7                                       | 2.691                                    | 15 AMP LEAD ONLY                              | 220-240V | 1250                | 770           | 410            | 88             |
| LSCM4 | 1485           | 690           | 555            | 85     | 1455x672                          | 75-95         | 0.68            | 50 HZ     | 15.7                                       | 3.611                                    | 20 AMP LEAD ONLY                              | 220-240V | 1590                | 770           | 410            | 107            |
| LSCM5 | 1825           | 690           | 555            | 97     | 1795x672                          | 75-95         | 0.86            | 50 HZ     | 19.6                                       | 4.508                                    | 20 AMP LEAD ONLY                              | 220-240V | 1930                | 770           | 410            | 128            |
| LSCM6 | 2165           | 690           | 555            | 109    | 2135x672                          | 75-95         | 1.04            | 50 HZ     | 23.5                                       | 5.405                                    | 30 AMP LEAD ONLY                              | 220-240V | 2270                | 770           | 410            | 140            |

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Ceramic Heaters and LED Lighting
- Digital thermostatic controller

LSCM LEFT SIDE ELEVATION

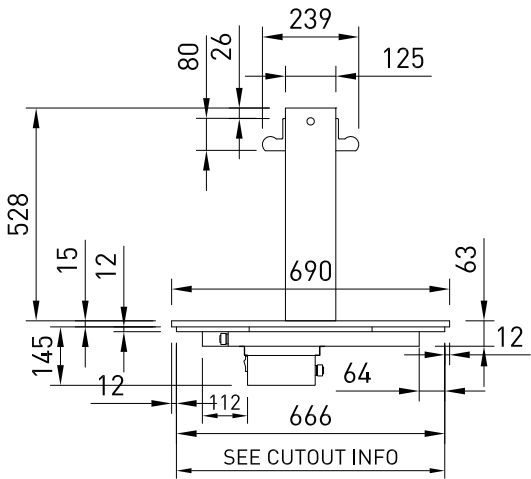




ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.  
Unit must be hard wired on site to isolation switch.




ASSEMBLY REQUIRED

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents




### LSCM2

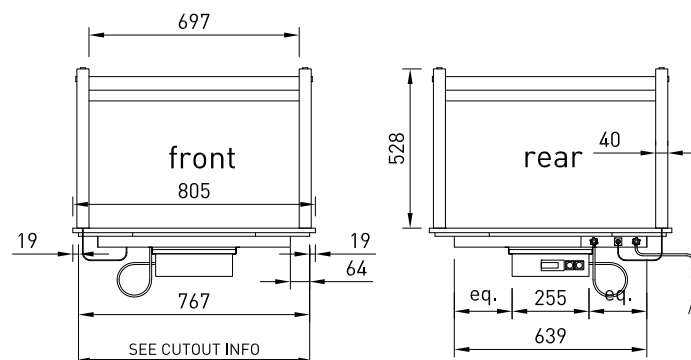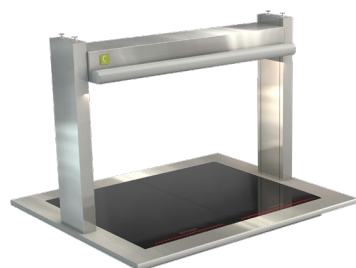

### LSCM3

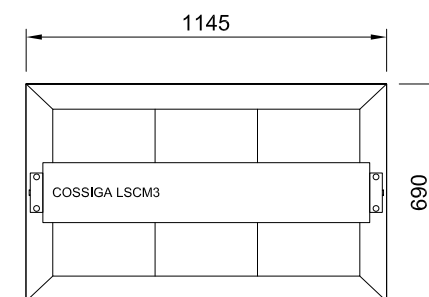
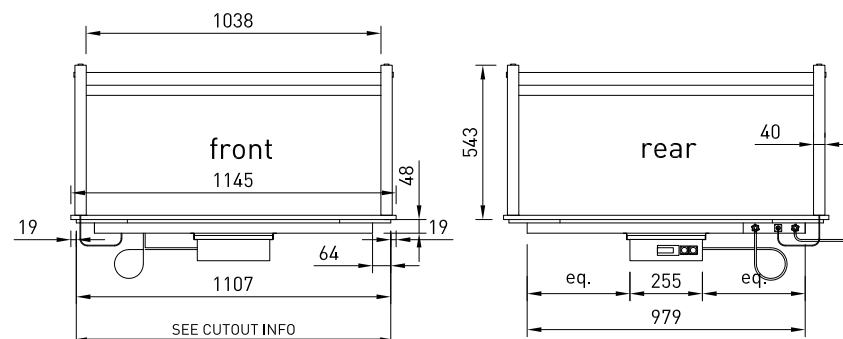
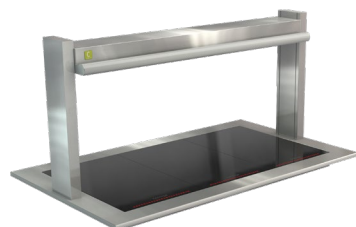


### LSCM4

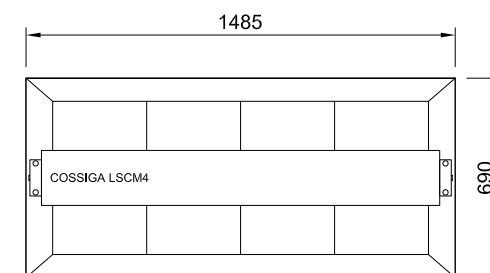
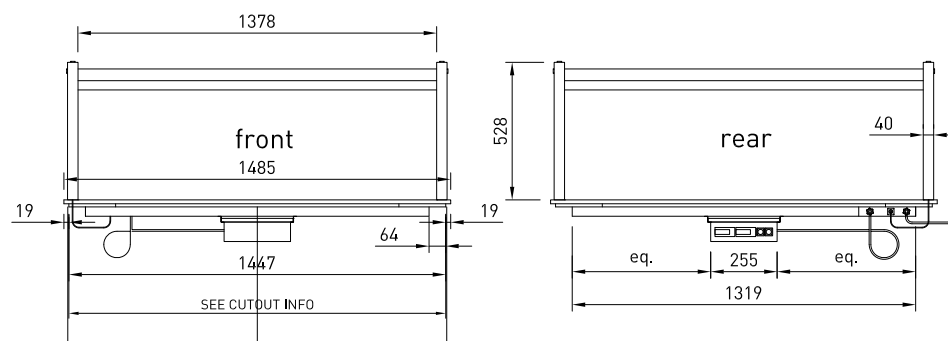
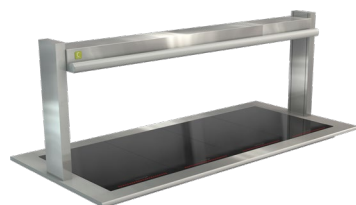


### ASSEMBLY REQUIRED

### LSCM5

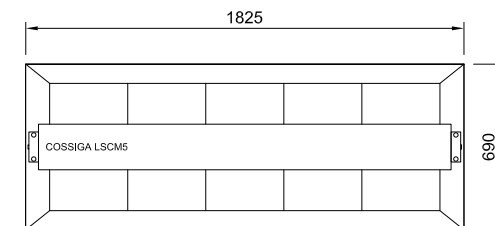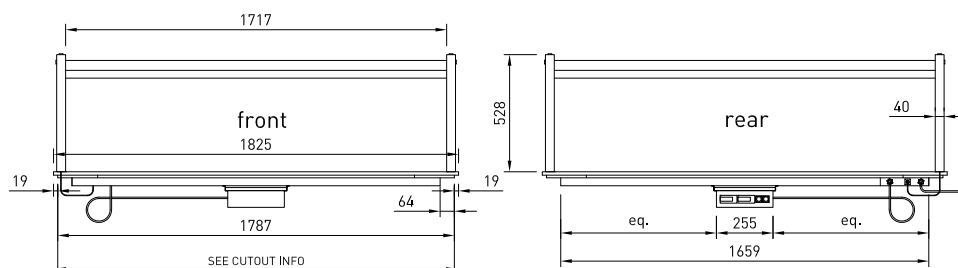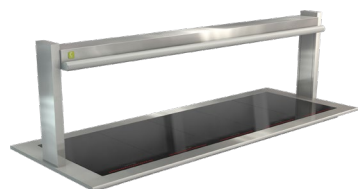

### LSCM6

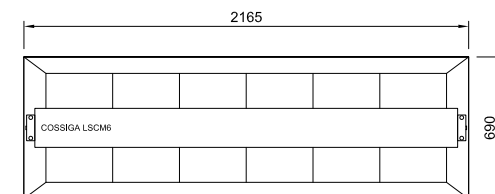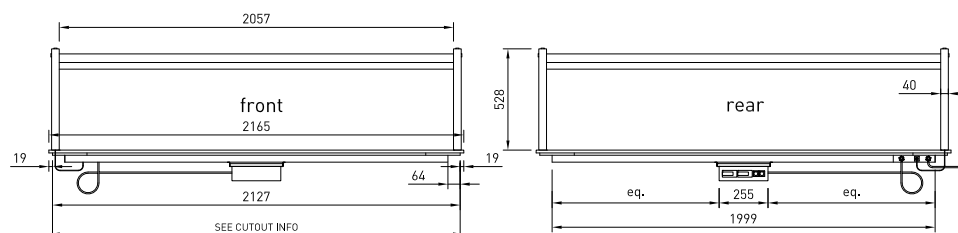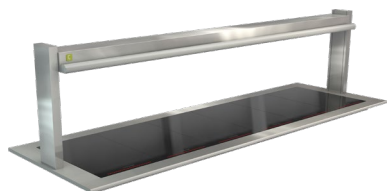

ASSEMBLY REQUIRED


## CABINET DIMENSIONS & SPECIFICATIONS

| MODEL    | CABINET        |               |                | WEIGHT | BENCH TOP<br>CUT OUT<br>HOLE SIZE | TEMP<br>RANGE | DISPLAY<br>AREA | FREQUENCY | OPERATING CURRENT | POWER      | CONNECTION<br>ELECTRICAL POWER CORD<br>3000MM | VOLTAGE  | PACKED FOR SHIPPING |               |                |                |
|----------|----------------|---------------|----------------|--------|-----------------------------------|---------------|-----------------|-----------|-------------------|------------|-----------------------------------------------|----------|---------------------|---------------|----------------|----------------|
|          | LENGTH<br>[MM] | DEPTH<br>[MM] | HEIGHT<br>[MM] | KG     |                                   | DEG C         | M2              |           | AMPS              | KW<br>230V | NZ/AUS/UK                                     |          | LENGTH<br>[MM]      | DEPTH<br>[MM] | HEIGHT<br>[MM] | WEIGHT<br>[KG] |
| LSCM2-NG | 805            | 690           | 555            | 65     | 775x672                           | 75-95         | 0.33            | 50 HZ     | 5.2               | 1.2        | 10 AMP 3 PIN PLUG (UK<br>13 AMP)              | 220-240V | 910                 | 770           | 410            | 76             |
| LSCM3-NG | 1145           | 690           | 555            | 65     | 1115x672                          | 75-95         | 0.51            | 50 HZ     | 7.61              | 1.75       | 15 AMP LEAD ONLY                              | 220-240V | 1250                | 770           | 410            | 88             |
| LSCM4-NG | 1485           | 690           | 555            | 85     | 1455x672                          | 75-95         | 0.68            | 50 HZ     | 10.25             | 2.36       | 20 AMP LEAD ONLY                              | 220-240V | 1590                | 770           | 410            | 107            |
| LSCM5-NG | 1825           | 690           | 555            | 97     | 1795x672                          | 75-95         | 0.86            | 50 HZ     | 12.78             | 2.94       | 20 AMP LEAD ONLY                              | 220-240V | 1930                | 770           | 410            | 128            |
| LSCM6-NG | 2165           | 690           | 555            | 109    | 2135x672                          | 75-95         | 1.04            | 50 HZ     | 15.32             | 3.52       | 30 AMP LEAD ONLY                              | 220-240V | 2270                | 770           | 410            | 140            |

## PRODUCT FEATURES

- Ceramic Heated Glass
- Digital thermostatic controller

## LSCM-NG LEFT SIDE ELEVATION

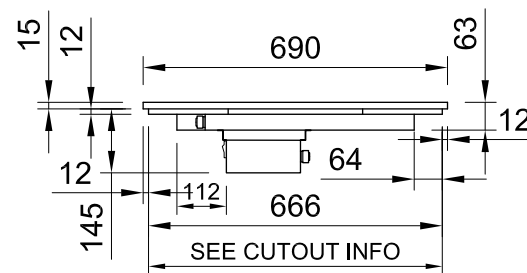





## ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.  
Unit must be hard wired on site to isolation switch.





## ASSEMBLY REQUIRED

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents





## LSCM2-NG

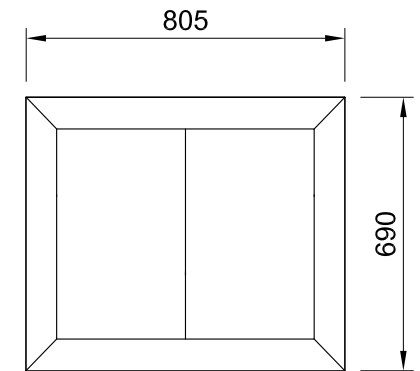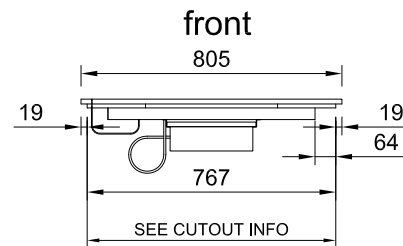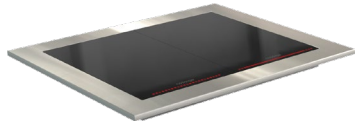

## LSCM3-NG

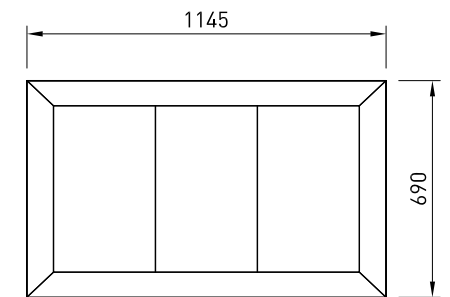
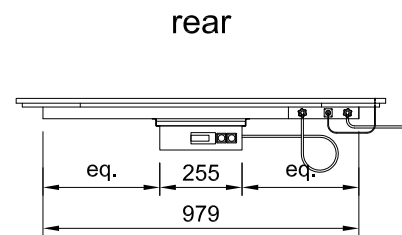
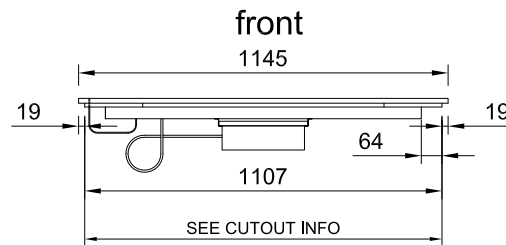



## LSCM4-NG

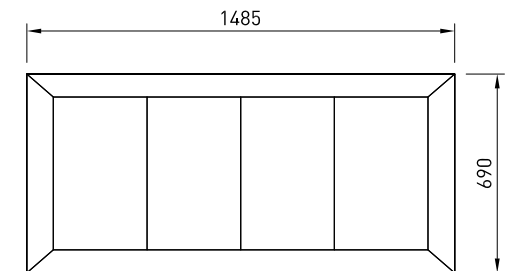
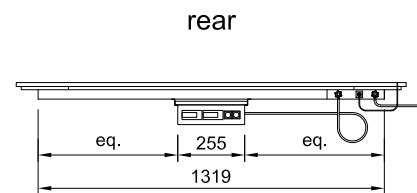
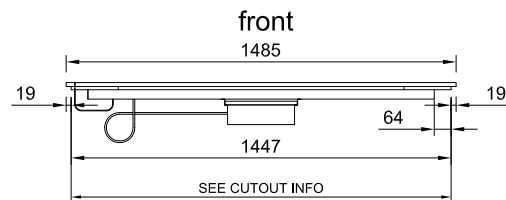



## ASSEMBLY REQUIRED

## LSCM5-NG

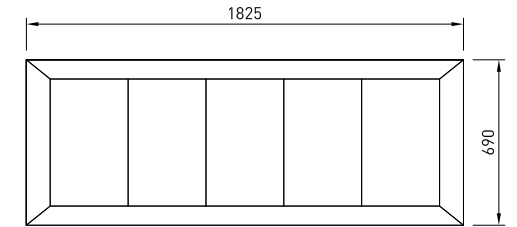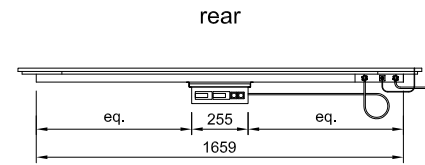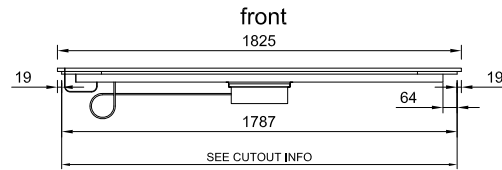

## LSCM6-NG

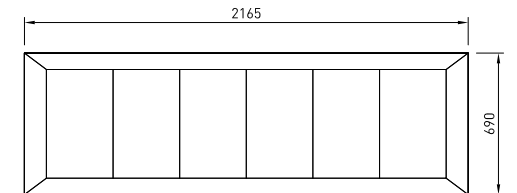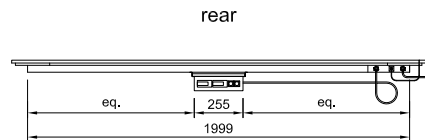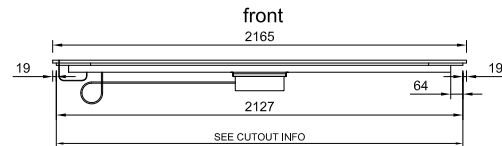

ASSEMBLY REQUIRED

COSSIGA

| MODEL    | CABINET        |               |                | WEIGHT | BENCH TOP<br>CUT OUT<br>HOLE SIZE | TEMP<br>RANGE | DISPLAY<br>AREA | FREQUENCY | CURRENT WITH<br>OVERHEAD HEATING &<br>LEDS | POWER WITH<br>OVERHEAD<br>HEATING & LEDES | CONNECTION<br>ELECTRICAL POWER CORD<br>3000MM | VOLTAGE  | PACKED FOR SHIPPING |               |                |                |
|----------|----------------|---------------|----------------|--------|-----------------------------------|---------------|-----------------|-----------|--------------------------------------------|-------------------------------------------|-----------------------------------------------|----------|---------------------|---------------|----------------|----------------|
|          | LENGTH<br>[MM] | DEPTH<br>[MM] | HEIGHT<br>[MM] | KG     |                                   | DEG C         | M2              |           | AMPS                                       | KW<br>230V                                | NZ/AUS/UK                                     |          | LENGTH<br>[MM]      | DEPTH<br>[MM] | HEIGHT<br>[MM] | WEIGHT<br>[KG] |
| LSCM2-FT | 805            | 690           | 555            | 65     | 775x672                           | 75-95         | 0.33            | 50 HZ     | 7.9                                        | 1.9                                       | 10 AMP 3 PIN PLUG (UK<br>13 AMP)              | 220-240V | 910                 | 770           | 410            | 76             |
| LSCM3-FT | 1145           | 690           | 555            | 65     | 1115x672                          | 75-95         | 0.51            | 50 HZ     | 11.7                                       | 2.691                                     | 15 AMP LEAD ONLY                              | 220-240V | 1250                | 770           | 410            | 88             |
| LSCM4-FT | 1485           | 690           | 555            | 85     | 1455x672                          | 75-95         | 0.68            | 50 HZ     | 15.7                                       | 3.611                                     | 20 AMP LEAD ONLY                              | 220-240V | 1590                | 770           | 410            | 107            |
| LSCM5-FT | 1825           | 690           | 555            | 97     | 1795x672                          | 75-95         | 0.86            | 50 HZ     | 19.6                                       | 4.508                                     | 20 AMP LEAD ONLY                              | 220-240V | 1930                | 770           | 410            | 128            |
| LSCM6-FT | 2165           | 690           | 555            | 109    | 2135x672                          | 75-95         | 1.04            | 50 HZ     | 23.5                                       | 5.405                                     | 30 AMP LEAD ONLY                              | 220-240V | 2270                | 770           | 410            | 140            |




Electrical power cord 3000mm 1 phase connection required.  
Unit must be hard wired on site to isolation switch.

 Download C.A.D models or contact us on [COSSIGA.COM](http://COSSIGA.COM)




# LSCM-FT LINEAR SERIES - CERAMIC HEATED GLASS - Flat Top Sneeze Guard

COSSIGA




LSCM2-FT

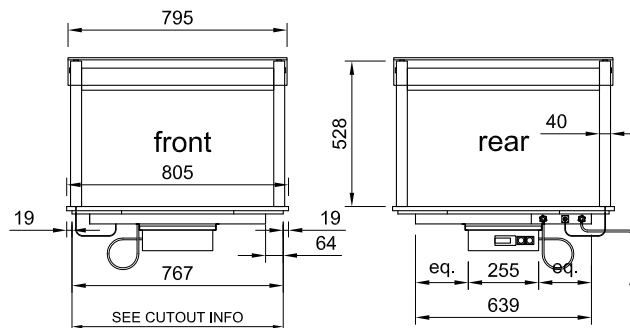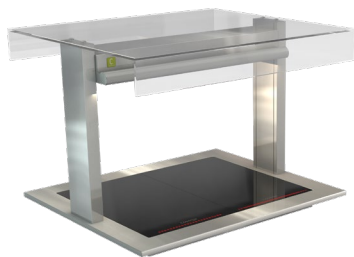

LSCM3-FT

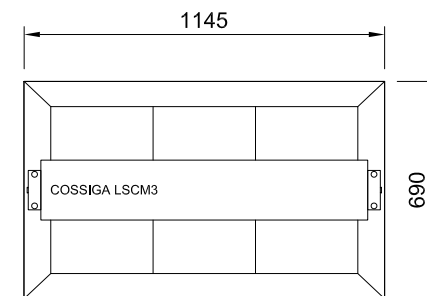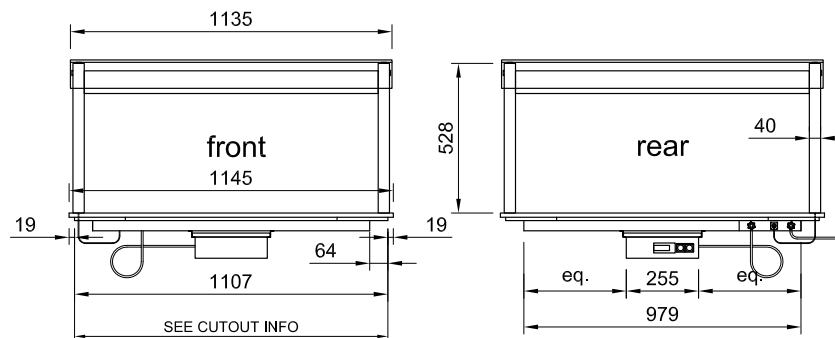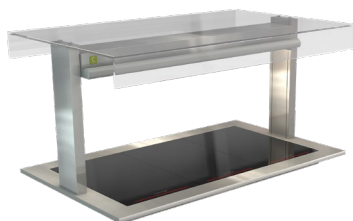

LSCM4-FT

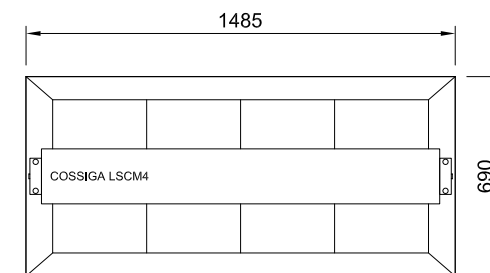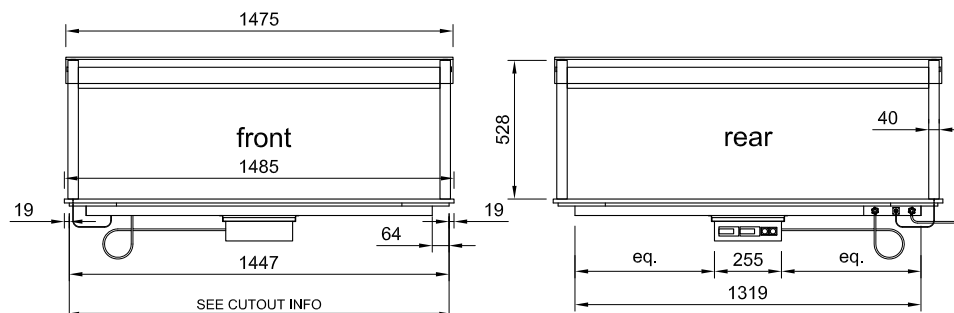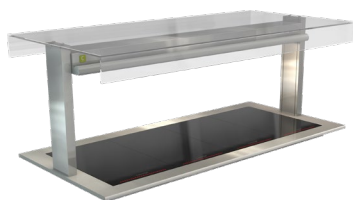




ASSEMBLY REQUIRED






# LSCM-FT LINEAR SERIES - CERAMIC HEATED GLASS - Flat Top Sneeze Guard

COSSIGA

## LSCM5-FT

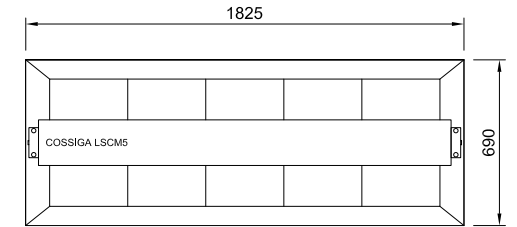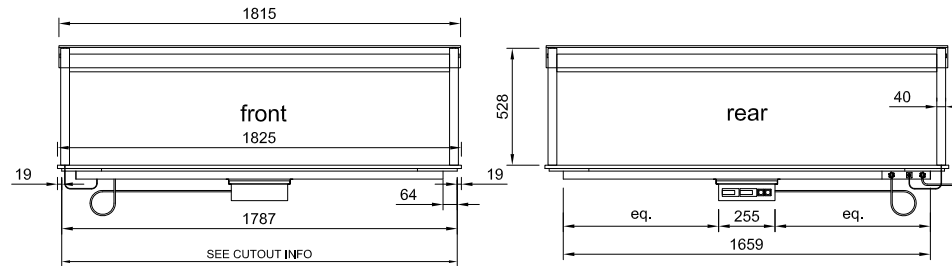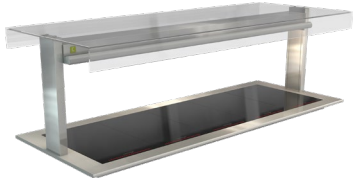

## LSCM6-FT

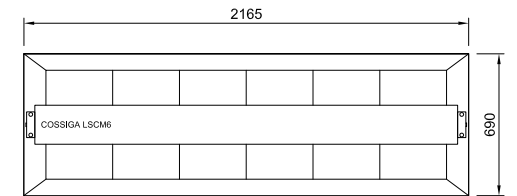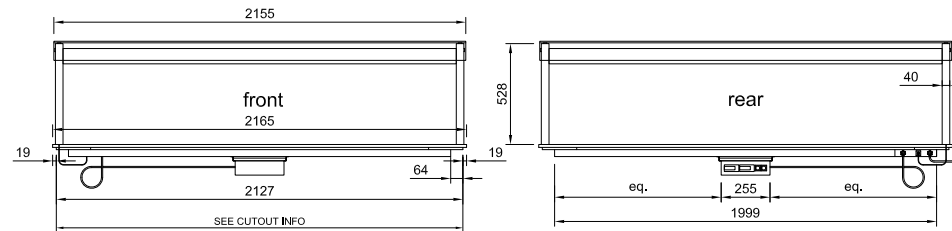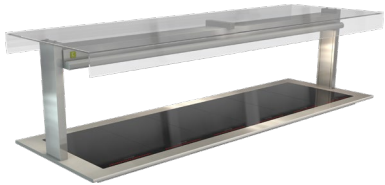

ASSEMBLY REQUIRED


CABINET DIMENSIONS & SPECIFICATIONS

| MODEL    | CABINET        |               |                | WEIGHT | BENCH TOP<br>CUT OUT<br>HOLE SIZE | TEMP<br>RANGE | DISPLAY<br>AREA | FREQUENCY | CURRENT WITH<br>OVERHEAD HEATING &<br>LEDS | POWER WITH<br>OVERHEAD<br>HEATING & LEDS | CONNECTION<br>ELECTRICAL POWER CORD<br>3000MM | VOLTAGE  | PACKED FOR SHIPPING |               |                |                |
|----------|----------------|---------------|----------------|--------|-----------------------------------|---------------|-----------------|-----------|--------------------------------------------|------------------------------------------|-----------------------------------------------|----------|---------------------|---------------|----------------|----------------|
|          | LENGTH<br>[MM] | DEPTH<br>[MM] | HEIGHT<br>[MM] | KG     |                                   | DEG C         | M2              |           | AMPS                                       | KW<br>230V                               | NZ/AUS/UK                                     |          | LENGTH<br>[MM]      | DEPTH<br>[MM] | HEIGHT<br>[MM] | WEIGHT<br>[KG] |
| LSCM2-FS | 805            | 690           | 555            | 65     | 775x672                           | 75-95         | 0.33            | 50 HZ     | 7.9                                        | 1.9                                      | 10 AMP 3 PIN PLUG (UK<br>13 AMP)              | 220-240V | 910                 | 770           | 410            | 76             |
| LSCM3-FS | 1145           | 690           | 555            | 65     | 1115x672                          | 75-95         | 0.51            | 50 HZ     | 11.7                                       | 2.691                                    | 15 AMP LEAD ONLY                              | 220-240V | 1250                | 770           | 410            | 88             |
| LSCM4-FS | 1485           | 690           | 555            | 85     | 1455x672                          | 75-95         | 0.68            | 50 HZ     | 15.7                                       | 3.611                                    | 20 AMP LEAD ONLY                              | 220-240V | 1590                | 770           | 410            | 107            |
| LSCM5-FS | 1825           | 690           | 555            | 97     | 1795x672                          | 75-95         | 0.86            | 50 HZ     | 19.6                                       | 4.508                                    | 20 AMP LEAD ONLY                              | 220-240V | 1930                | 770           | 410            | 128            |
| LSCM6-FS | 2165           | 690           | 555            | 109    | 2135x672                          | 75-95         | 1.04            | 50 HZ     | 23.5                                       | 5.405                                    | 30 AMP LEAD ONLY                              | 220-240V | 2270                | 770           | 410            | 140            |

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Ceramic Heaters and LED Lighting
- Digital thermostatic controller

LSCM-FS LEFT SIDE ELEVATION

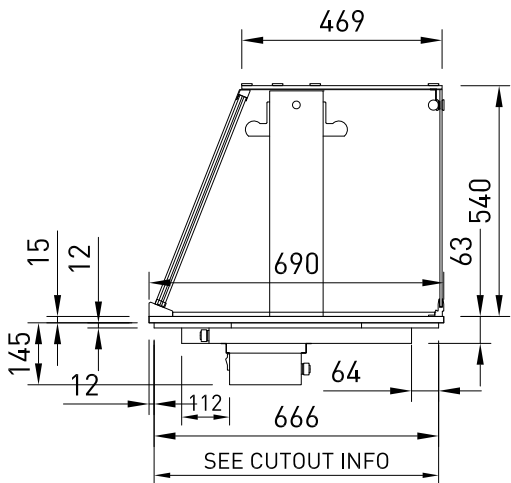

ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.  
Unit must be hard wired on site to isolation switch.

ASSEMBLY REQUIRED



Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

# LSCM-FS



## LINEAR SERIES - CERAMIC HEATED GLASS - Full Square Glass Canopy

coSSiga



## LSCM2-FS

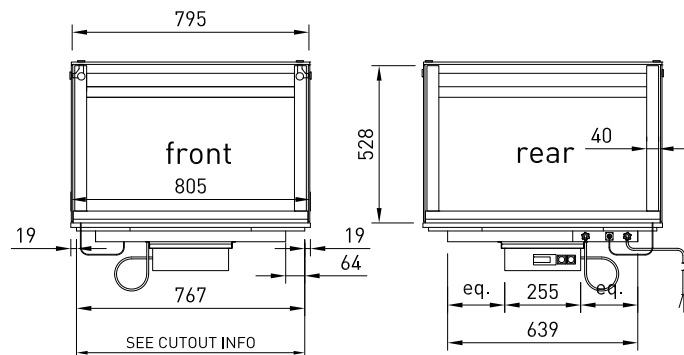

## LSCM3-FS

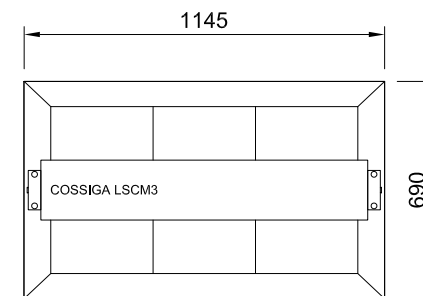
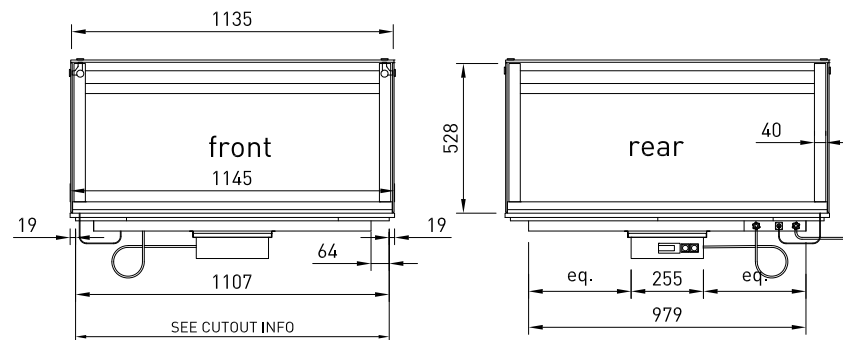


## LSCM4-FS


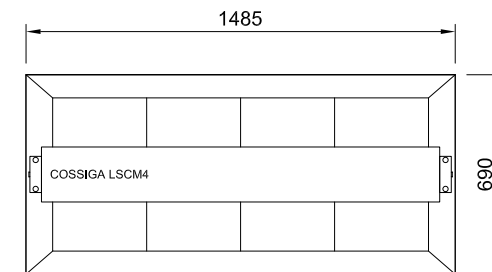
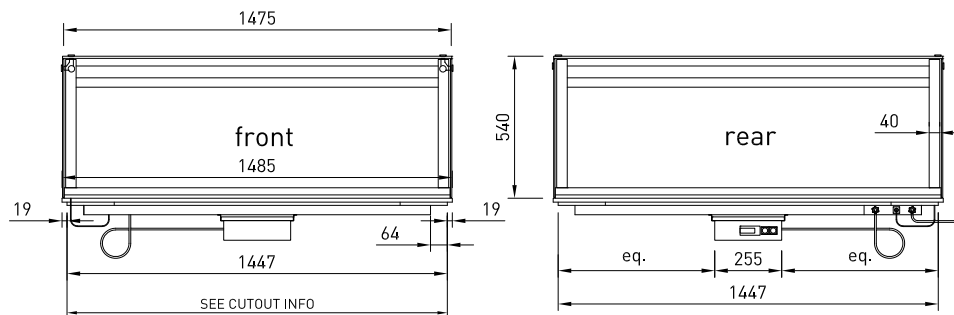


## ASSEMBLY REQUIRED

### LSCM5-FS

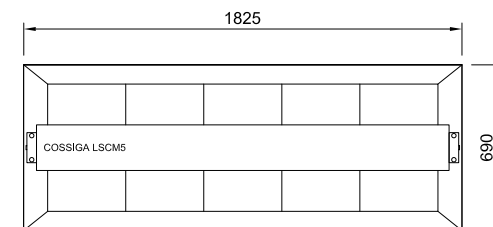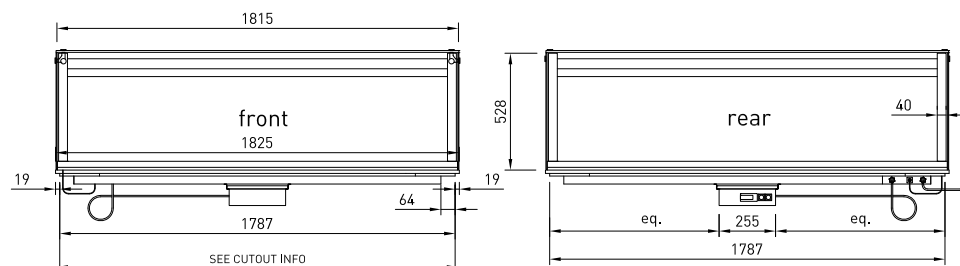

### LSCM6-FS

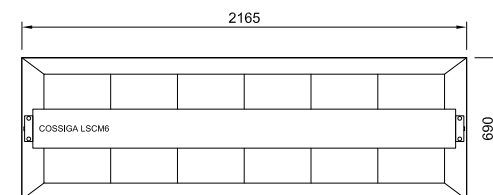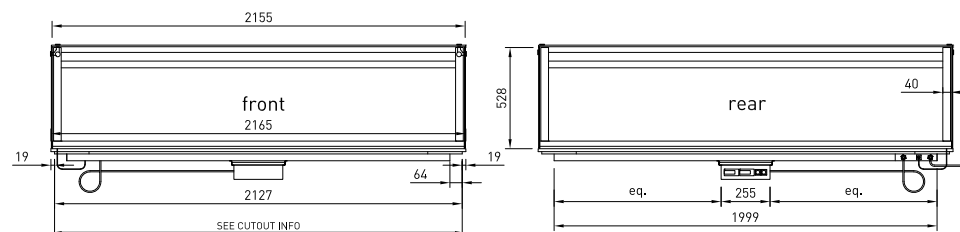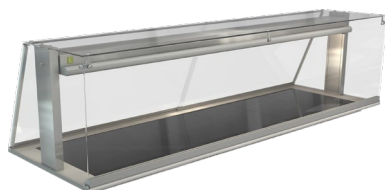

ASSEMBLY REQUIRED