


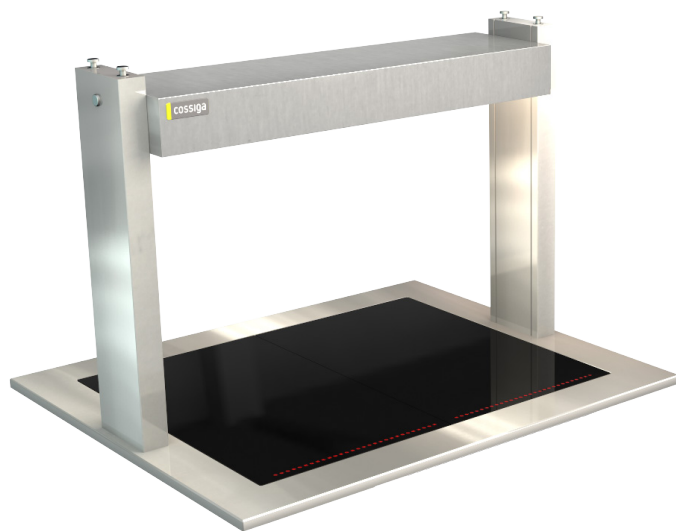

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights on panels
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM2	805	690	555	785x670	Ceramic Glass 2 x panels	7.5 Amp	15 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER





Electrical power cord 3000mm
1 phase connection required.


Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.

PANEL CONTROLLERS

Single controller
Controls 2 panels

Single
Panel
Controller

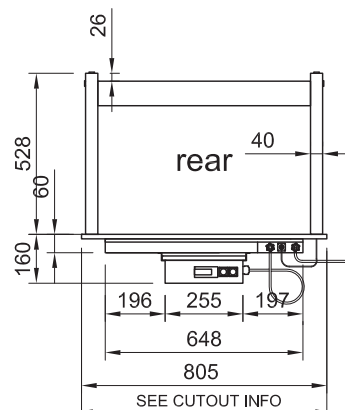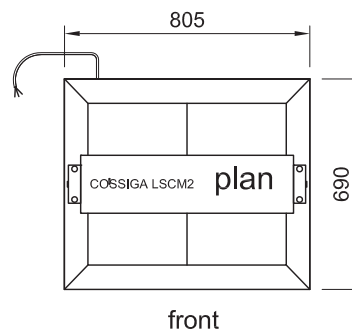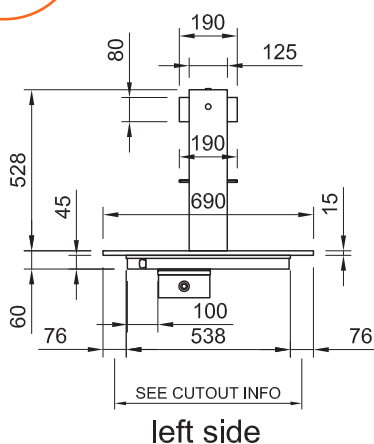

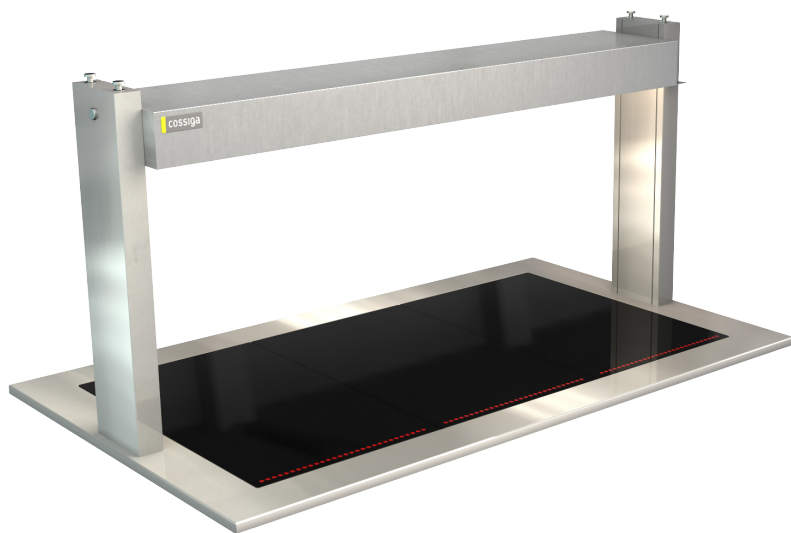

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights on panels
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM3	1145	690	555	1125x670	Ceramic Glass 3 x panels	11.3 Amp	20 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER


Electrical power cord 3000mm
1 phase connection required.

Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.


PANEL CONTROLLERS

Single controller
Controls 3 panels


Single
Panel
Controller

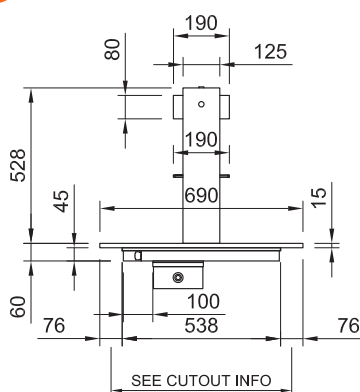


left side

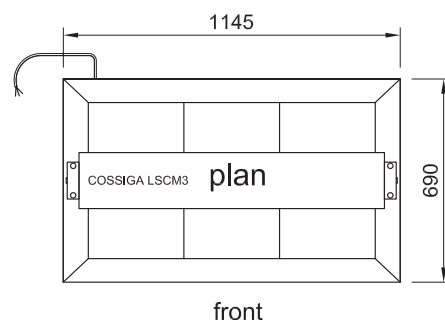

front



front

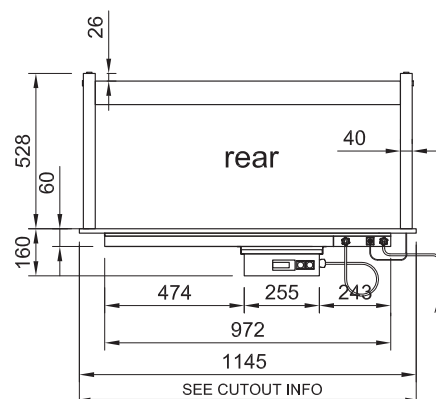

rear



PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights on panels
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM4	1485	690	555	1465x670	Ceramic Glass 4 x panels	15 Amp	20 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.



ELECTRICAL POWER

Electrical power cord 3000mm
1 phase connection required.


Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.

PANEL CONTROLLERS


Dual controllers
Controller 1 - 2 panels
Controller 2 - 2 panels

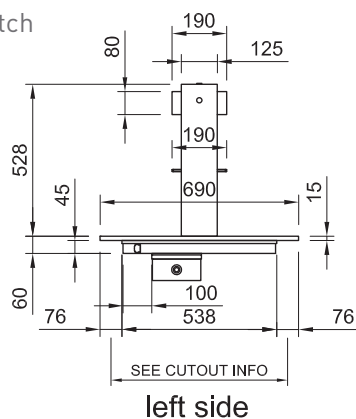


left side

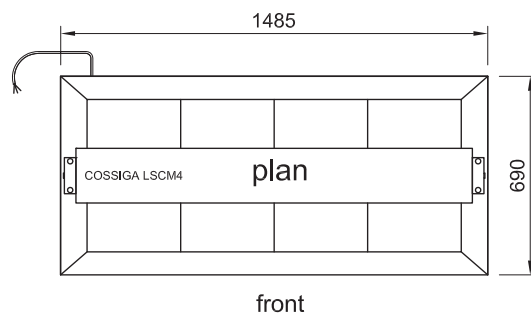

front

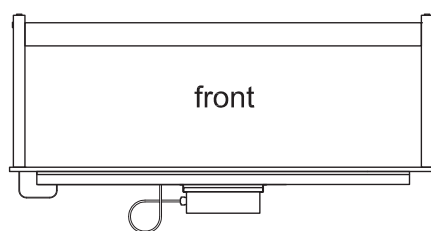


front

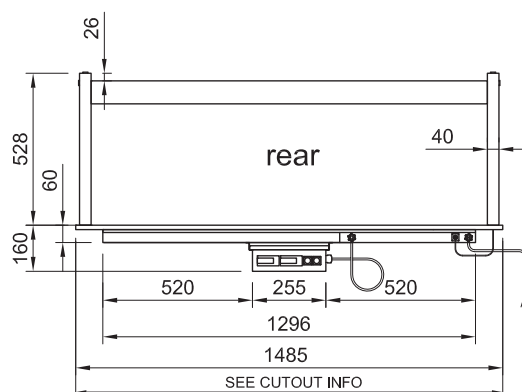

rear



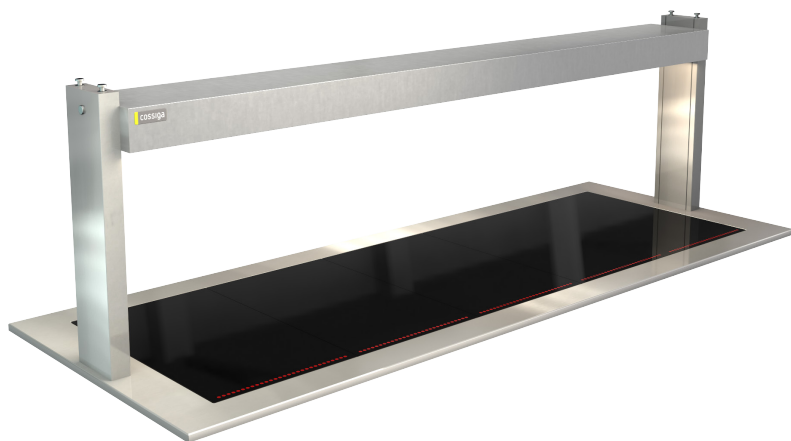

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights on panels
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM5	1825	690	555	1805x670	Ceramic Glass 5 x panels	18.8 Amp	20 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.






ELECTRICAL POWER


Electrical power cord 3000mm
1 phase connection required.

Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.

PANEL CONTROLLERS

Dual controllers
Controller 1 - 2 panels
Controller 2 - 3 panels

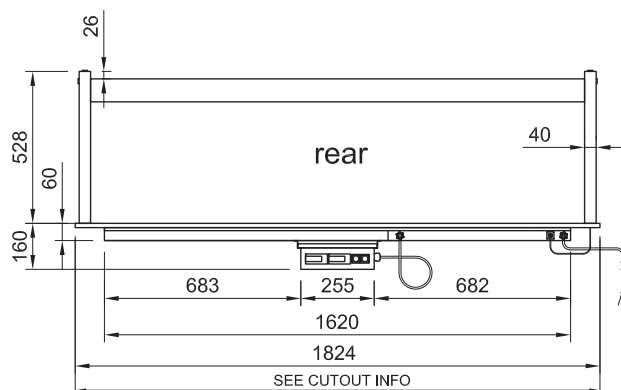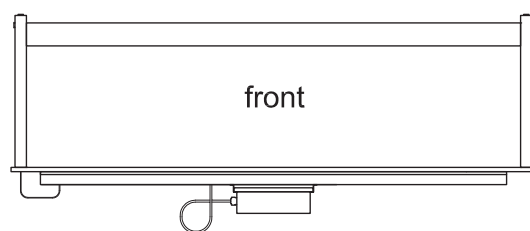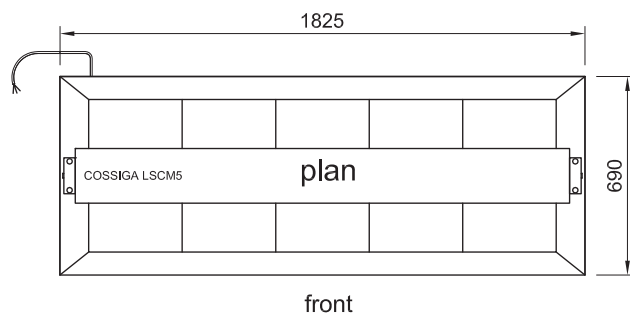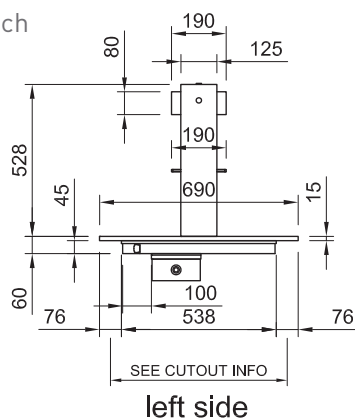

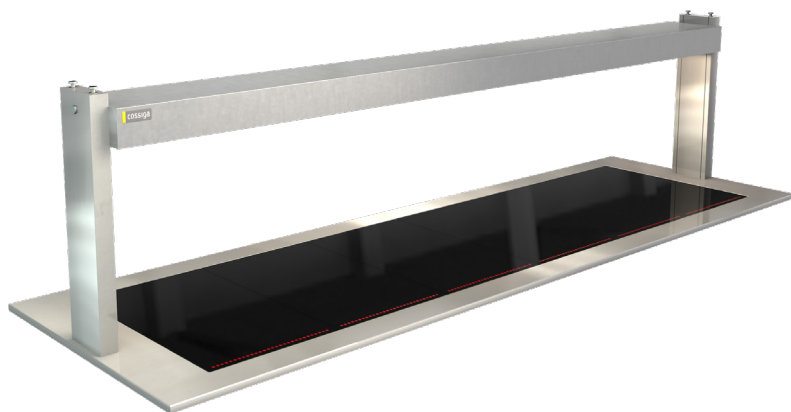

PRODUCT FEATURES

- Ceramic Heated Glass
- Overhead Halogen Lamps
- Digital thermostatic controller
- Heat indicating LED lights on panels
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

CERAMIC TOP

Model	Cabinet			bench cut out hole size	Heating	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm					50/60 Hertz
LSCM6	2165	690	555	2145x670	Ceramic Glass 6 x panels	22.5 Amp	30 amp lead only	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 3000mm
1 phase connection required.

Unit can be hard wired to isolation switch
or fitted with suitable heavy duty plug
such as PDL 56 series or Commando
style plug.

PANEL CONTROLLERS

Dual controllers
Controller 1 - 3 panels
Controller 2 - 3 panels

