




HC LSHC4
LSHC5
LSHC6

- Stainless Steel 304 construction
- Fits LSBM & LSCM 4,5,6
- Sliding doors
- Separate hot cupboard controller
- Adjustable feet with recessed rollers for easy manoeuvrability
- Fan forced heat delivery

When Bain Marie unit fitted it must be plumbed for cold water fill and drain to waste

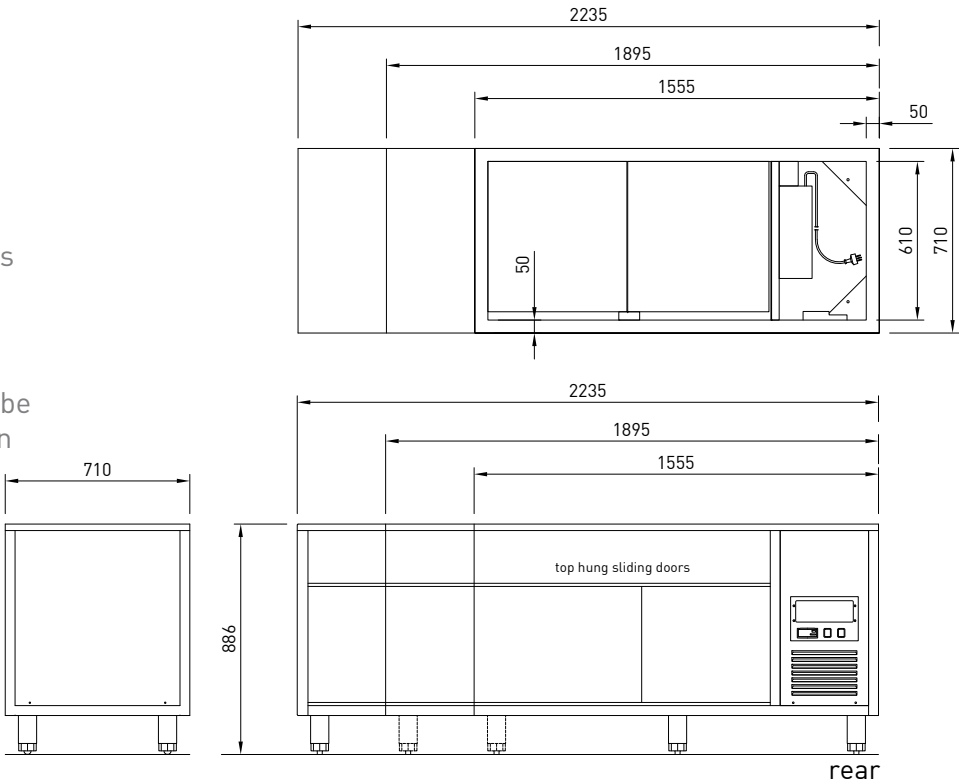

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			WEIGHT [KG]	OPERATING TEMP	SHELF INTERNAL	FITS UNITS		INTERNAL VOLUME M ³	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]				1 X MID SHELF W X D	100MM UNITS			KW 230V	AMP	NZ/AUS 3 PIN 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
LSCH4	1555	710	886	163	45-75	1080 X 630	LSBM4	LSCM4	0.32	50/60 HZ	1.06	4.6	3 PIN PLUG	3 PIN PLUG	220-240V	1695	820	1044	153
LSCH5	1895	710	886	184	45-75	1400 X 630	LSBM5	LSCM5	0.42	50/60 HZ	1.06	4.6	3 PIN PLUG	3 PIN PLUG	220-240V	2035	820	1044	174
LSCH6	2235	710	886	205	45-75	1750 X 630	LSBM6	LSCM6	0.52	50/60 HZ	1.06	4.6	3 PIN PLUG	3 PIN PLUG	220-240V	2375	820	1044	195