



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF2	805	690	555	785x670	2 x 1/1 65mm Gastro Pans	134a	4.6 Amp	10amp 3 pin plug	240V




* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

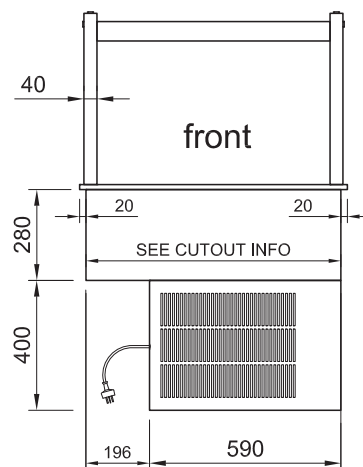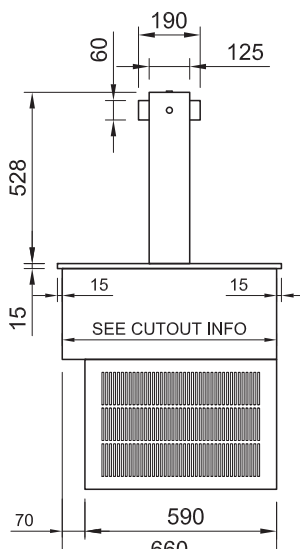



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF3	1145	690	555	1125x670	3 x 1/1 65mm Gastro Pans	134a	4.6 Amp	10amp 3 pin plug	240V




* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

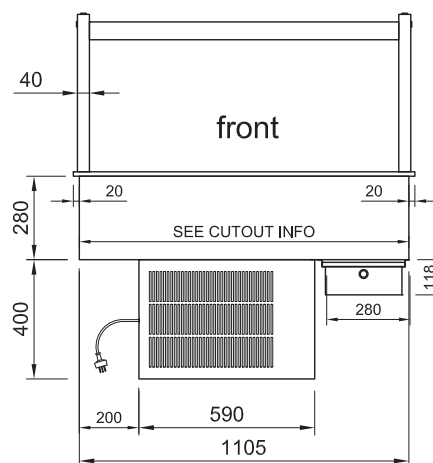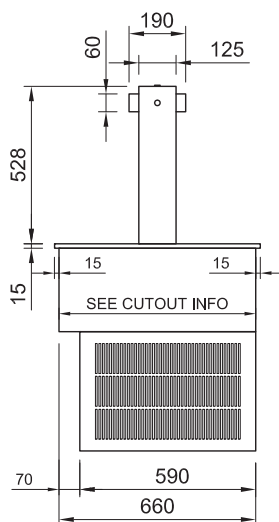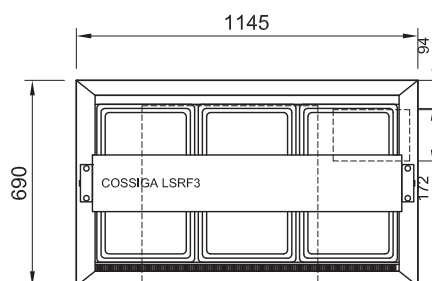



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF4	1485	690	555	1465x670	4 x 1/1 65mm Gastro Pans	134a	4.8 Amp	10amp 3 pin plug	240V




* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

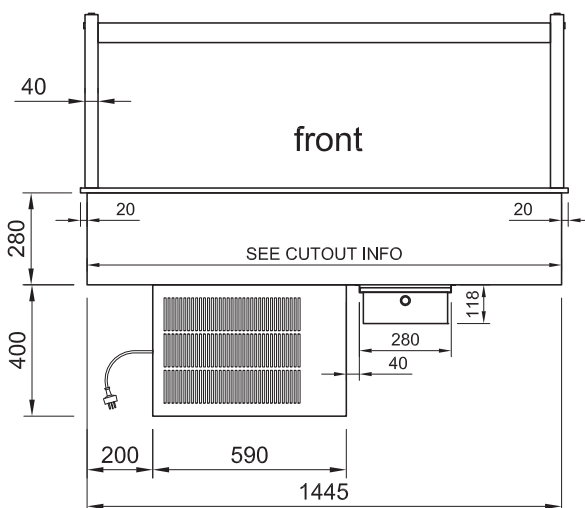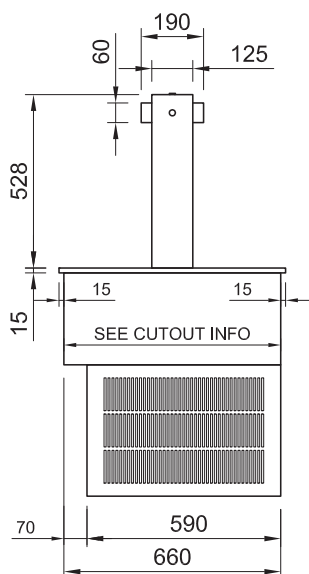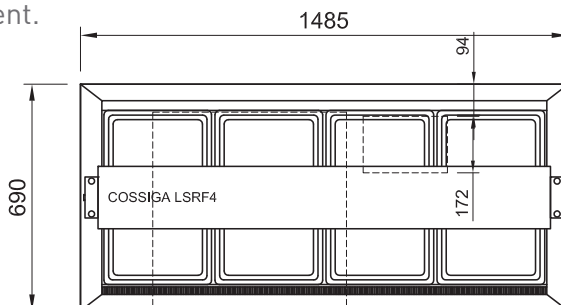



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF5	1825	690	555	1805x670	5 x 1/1 65mm Gastro Pans	134a	4.8 Amp	10amp 3 pin plug	240V




* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

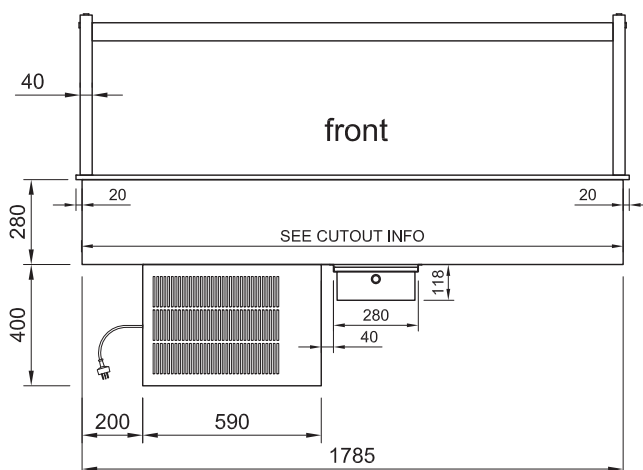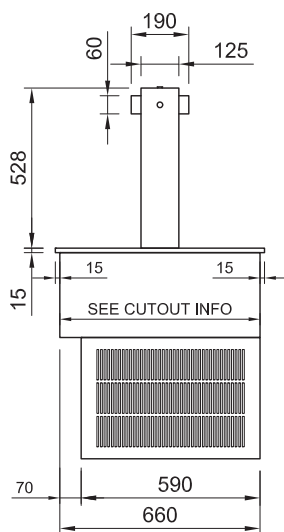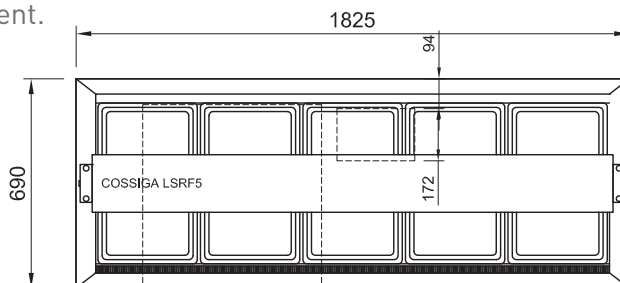



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *

UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF6	2165	690	555	2145x670	6 x 1/1 65mm Gastro Pans	134a	5.0 Amp	10amp 3 pin plug	240V




* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS

When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

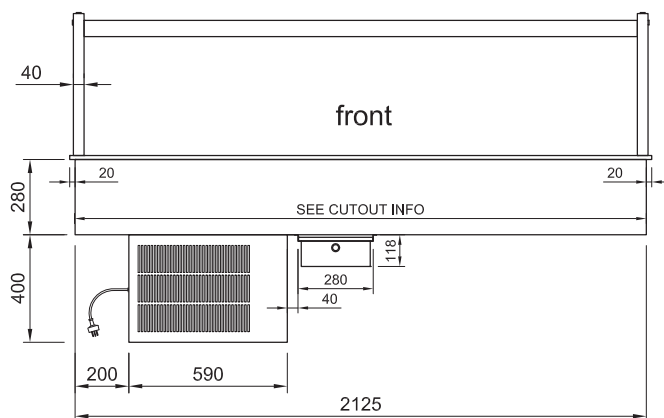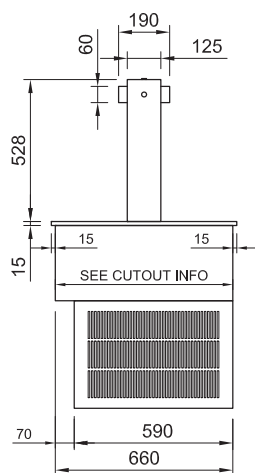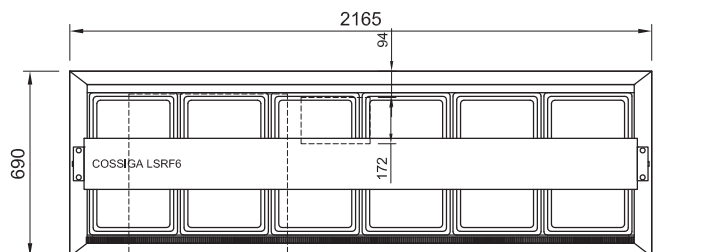




DOUBLE CURVED GLASS

- Clear 8mm toughend glass
- Curved two sides

DIMENSIONS & SPECIFICATIONS

Model	glass size			Part Number
GLDC GLASS TYPE	Length X mm	Depth mm	Height mm	
LSCM2	795	685	96	S21-634
LSRF3/LSBM3/LSCM3	1135	685	96	S21-596
LSRF4/LSBM4/LSCM4	1475	685	96	S21-635
LSRF5/LSBM5/LSCM5	1815	685	96	S21-636
LSRF6/LSBM6/LSCM6	2155	685	96	S21-637

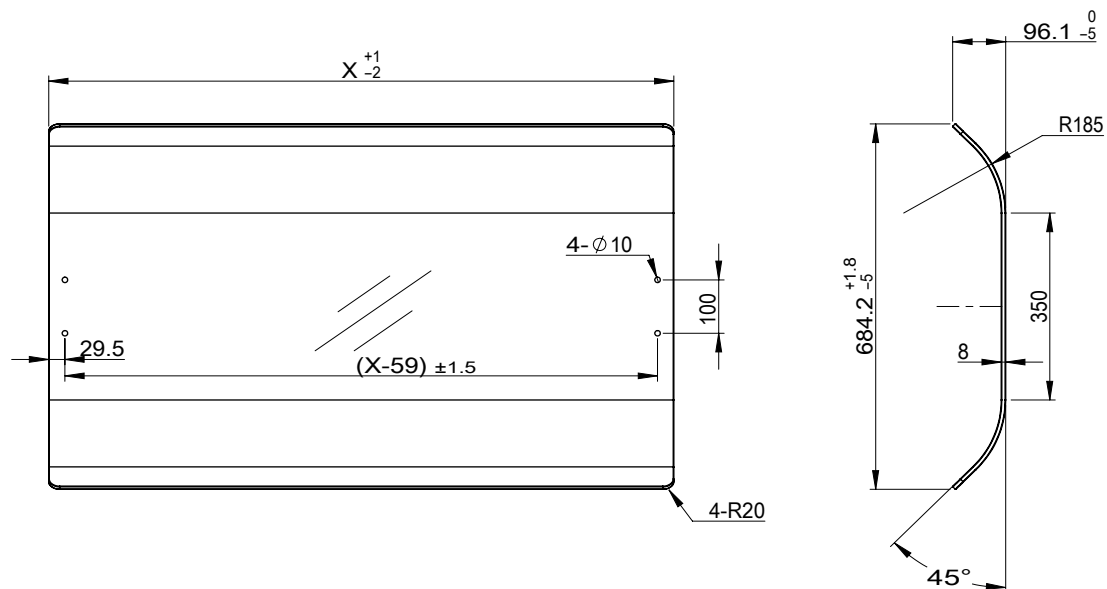




FLAT TOP GLASS

- Clear 8mm toughend glass
- Flat top and sides

DIMENSIONS & SPECIFICATIONS

Model	glass size			Part Number
GLFT GLASS TYPE	Length X mm	Depth mm	Height mm	
LSCM2	795	685	100	S21-626
LSRF3/LSBM3/LSCM3	1135	685	100	S21-583
LSRF4/LSBM4/LSCM4	1475	685	100	S21-627
LSRF5/LSBM5/LSCM5	1815	685	100	S21-628
LSRF6/LSBM6/LSCM6	2155	685	100	S21-629

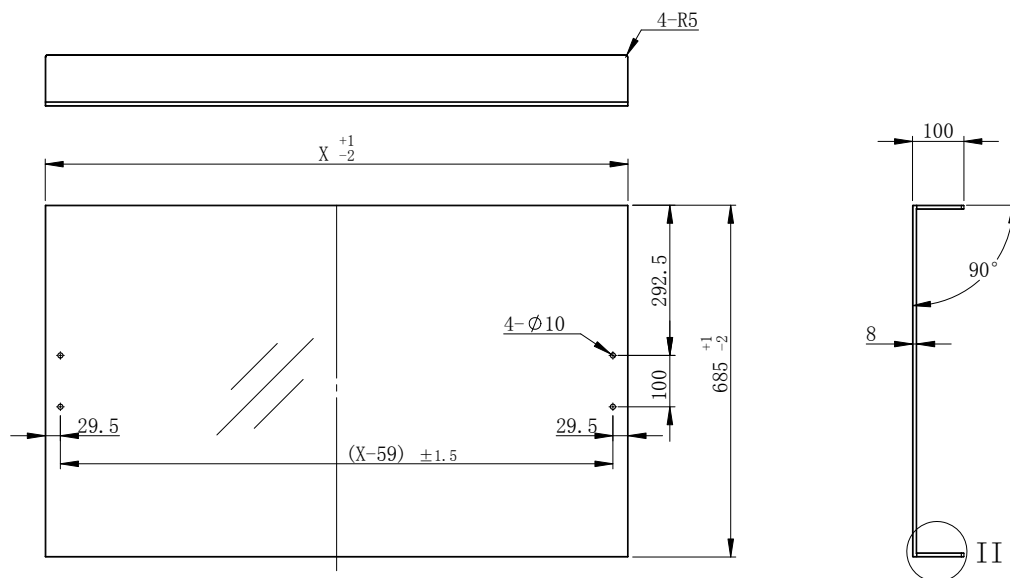



FULL SQUARE GLASS

- Sliding acrylic rear doors
- Glass sides
- Clear 8mm toughend glass

DIMENSIONS & SPECIFICATIONS

Model	glass size			Part Number
GLFS GLASS TYPE	Length X mm	Depth mm	Height mm	
LSCM2	795	690	540	
LSRF3/LSBM3/LSCM3	1135	690	540	
LSRF4/LSBM4/LSCM4	1475	690	540	
LSRF5/LSBM5/LSCM5	1815	690	540	
LSRF6/LSBM6/LSCM6	2155	690	540	

