



- Specifications of Product:
- * Heated banquet with single glass door
 - * The convection-heated banquet trolleys can be used dry or with moist air, depending on what is best for your food.
 - * Digital control with cabinet temperature display and setting. Fully compliant HACCP digital controls include visible alarms.
 - * Large storage area suitable to contain 2/1 GN containers or shelves on anti-tilt pressed runners.
 - * Optimized bottom to up forced air flow provide even temperature distribution and fast heating in any conditions.
 - * Cabinet fitted with up to 70 mm thickness of polyurethane insulation for best insulating performance with 100% environmental protection.
 - * Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption.
 - * Spacers on the sides-end ensure that the convection air in the interior of the banquet trolley can circulate all around, achieving temperature distribution which is as even as possible.
 - * The slide-in convection-heated module can be removed particularly easily.
 - * The water tank for the moist-air heating can also be removed conveniently.
 - * Manual water refilling.


Optional Accessory: * Stainless steel shelf

Product Dimensions

Length of Product (mm).....	827
Width of Product (mm).....	910
Height of Product (mm) H.....	1816
Net Weight (Kg).....	120
Gross Weight (Kg).....	135
Volume of Product (m3).....	1,3667
Capacity.....	GN2/1 x 11 Ad.

Package Dimensions

Length of Package (mm).....	877
Width of Package (mm).....	960
Height of Package (mm).....	1.866
Volume of Package (m3).....	1,5710
Product Number in Package.....	1

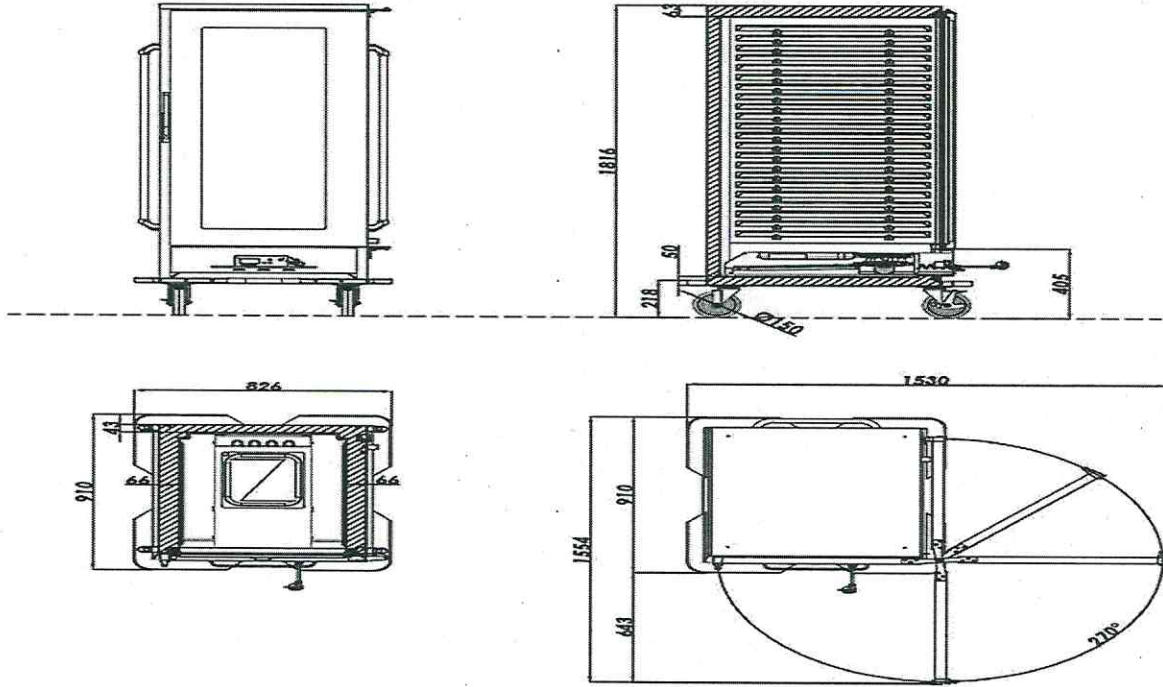

Electrical Specifications

Electrical Power (kW): 2 kW
 Volt (Monophase/Triphase): 220-240 V
 Electrical Frequency (Hz).....: 50 Hz

Gas Specifications

Gas Type

Other Technical Specifications

Cooling Gas:---

Max Noise (dBA): 60
 Protection Class.....: IPX5