

Six Drawer, Two Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR2-A4

Dimensions: 1290 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 288 L

Project: _____

Item #: _____



A six drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The six GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or two GN drawer bays. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

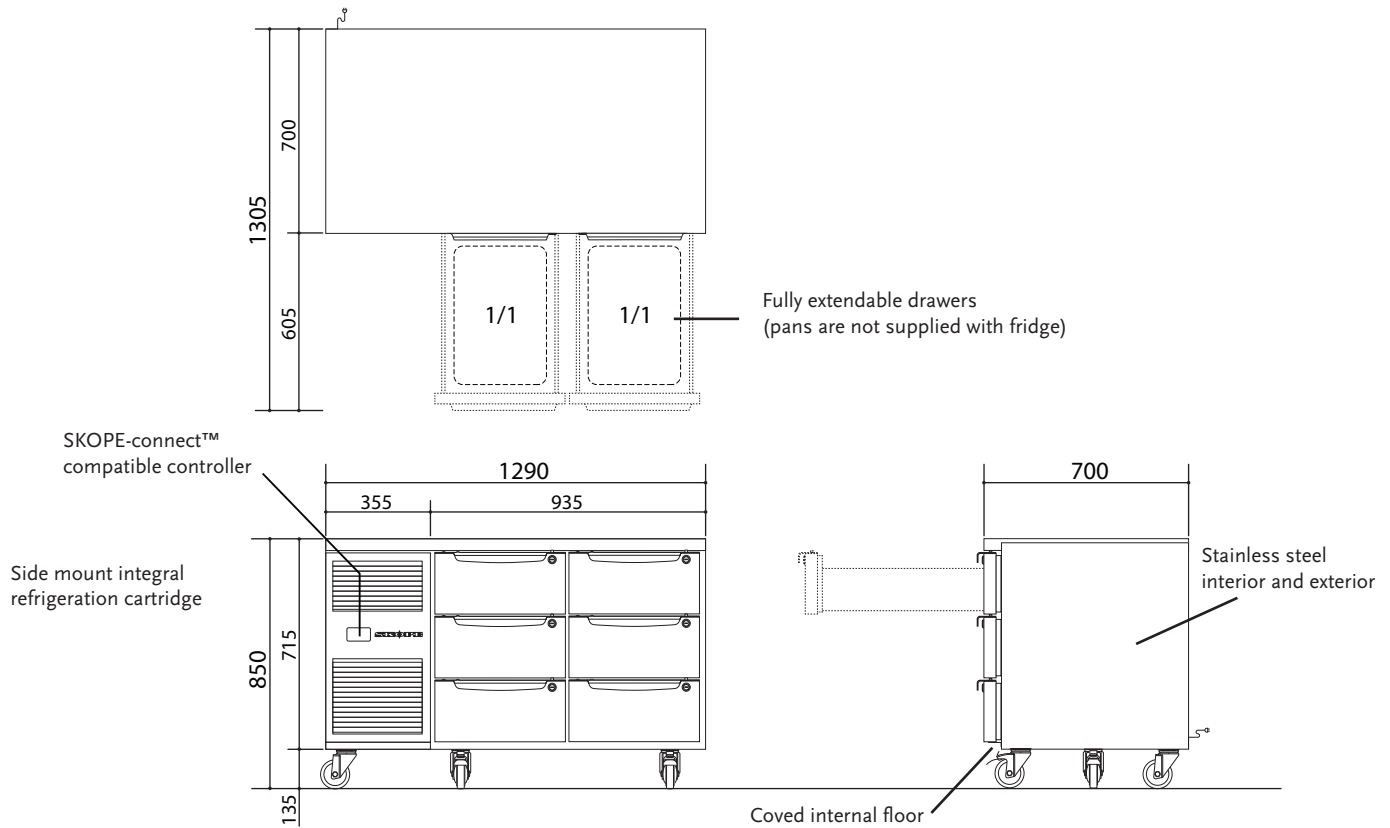**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1290	820	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	142 [TBC]		TBC
Gross Volume (L)	288		
Footprint (m²)	0.9		

Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets
			At each joint At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	5	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	2.10 kWh/24 h	
Annual Running Costs	\$230 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	85	Peak 90
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.2.D6
on the SKOPE website

Six Drawer, Two Bay, Underbench GN₁/1 Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR2-B4

Dimensions: 1290 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 288 L

Project: _____

Item #: _____



A six drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The six GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or two GN drawer bays. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

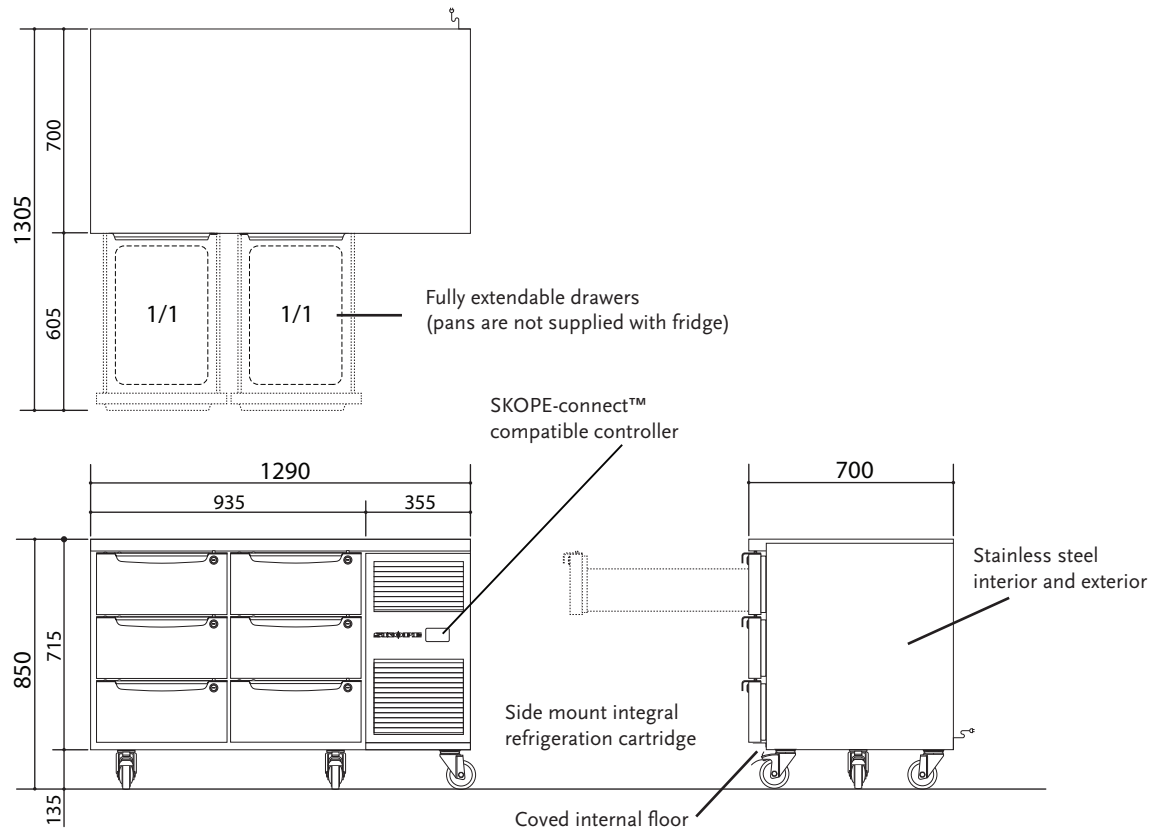**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1290	820	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	142 [TBC]		TBC
Gross Volume (L)	288		
Footprint (m²)	0.9		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets
			At each joint At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	5	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	2.10 kWh/24 h	
Annual Running Costs	\$230 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	85	Peak 90
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.2.D6.RH
on the SKOPE website

Nine Drawer, Three Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR3-A4

Dimensions: 1750 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 432 L

Project: _____

Item #: _____



A nine drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The nine GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or two GN drawer bays. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel




GN-compatible



SKOPE-connect



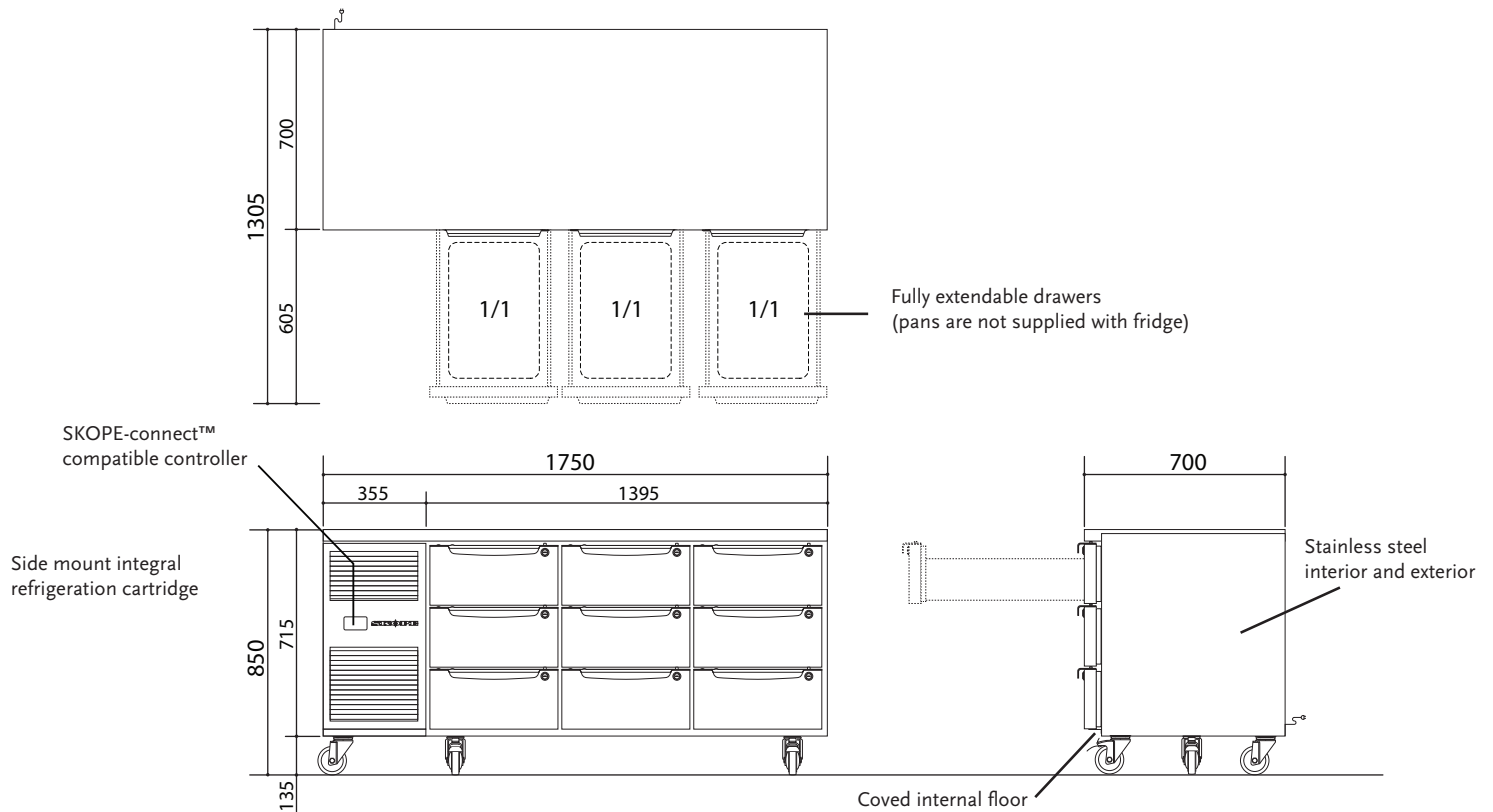

Cabinet

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1750	1275	TBC
Depth (mm)	700	560	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	130 [TBC]		TBC
Gross Volume (L)	432		
Footprint (m²)	1.23		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	65
	Hush Mode*	63

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	4	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	3.14 kWh/24 h	
Annual Running Costs	\$344 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/95 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	130	Peak 140
Defrost Type	Automatic, electric		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG11.UBR.3.D9
on the SKOPE website

Nine Drawer, Three Bay, Underbench GN₁/1 Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR3-B4

Dimensions: 1750 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 432 L

Project: _____

Item #: _____



A nine drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The nine GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or two GN drawer bays. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel




GN-compatible



SKOPE-connect

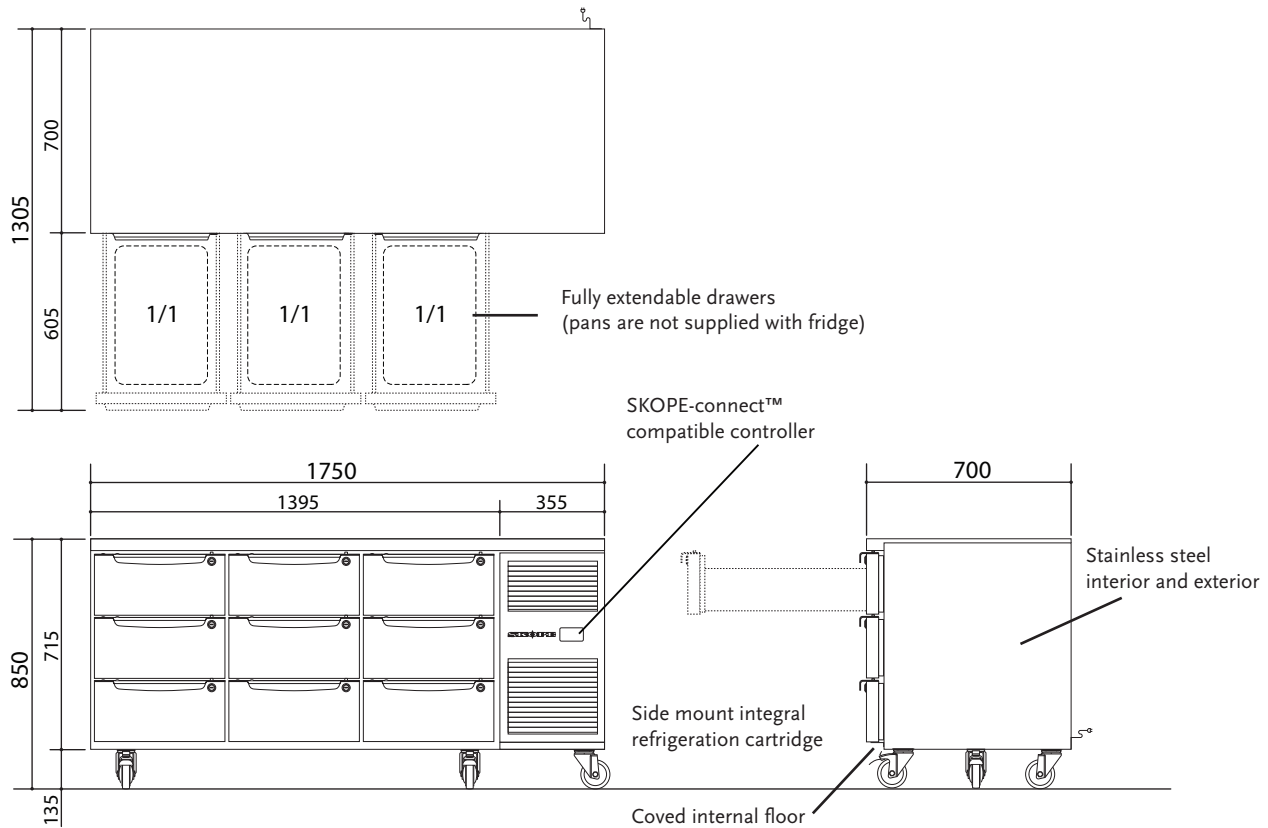

**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1750	1275	TBC
Depth (mm)	700	560	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	130 [TBC]		TBC
Gross Volume (L)	432		
Footprint (m²)	1.23		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	65
	Hush Mode*	63

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	4	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	3.14 kWh/24 h	
Annual Running Costs	\$344 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/95 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	130	Peak 140
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.3.D9.RH
on the SKOPE website

Two Drawer, One Bay, ChefBase GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1CR1-L3

Dimensions: 925 mm (W) × 815 mm (D) × 610 mm (H)

Gross Volume: 147 L

Project: _____

Item #: _____



A ChefBase two drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 610 mm high and 815 mm deep cabinet has a worktop suitable for holding a grill or other similar kitchen equipment, and comes complete with a marine edge. The fridge can be positioned on the supplied castors, on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 705 mm. The two GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge has a built-in, integral refrigeration system with side-mounted condensing unit, and uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. A controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more comes included. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

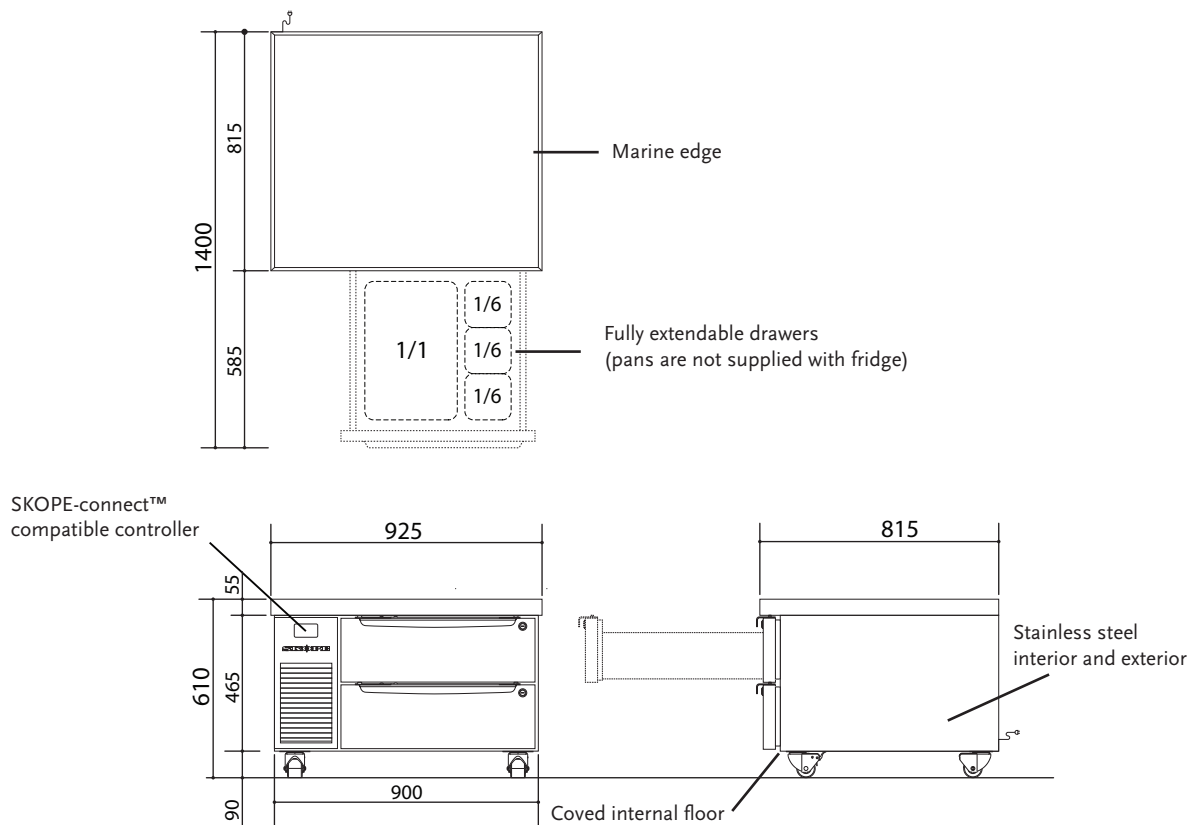**Cabinet**

Type	ChefBase		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Width (mm)	465	505
Lighting*	Depth (mm)	505	
	Height (mm)	100	

Dimensions†

	External	Internal	Packed
Width (mm)	925	595	TBC
Depth (mm)	815	650	TBC
Height (mm)	610 (standard castors)	380	TBC
	665 to 705 (legs)		
	520 (plinth mount)		
Weight (kg)	93 [TBC]		TBC
Gross Volume (L)	147		
Footprint (m²)	0.75		

Ventilation (mm)

Top	Sides	Rear
Not required	100 mm left side only	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	TBC
	Hush Mode*	TBC

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	4	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	2.55 kWh/24 h	
Annual Running Costs	\$279 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Split System		
Cartridge Weight (kg)	n.a.		
Refrigerant/Charge	R290/75 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	105	Peak 110
Defrost Type	Automatic, off-cycle		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG11.CBR.1.D2
on the SKOPE website

Four Drawer, Two Bay, ChefBase GN2/1 Fridge

Range: ProSpec

SKOPE ID: P2CR2-L3

Dimensions: 1840 mm (W) × 815 mm (D) × 610 mm (H)

Gross Volume: 373 L

Project: _____

Item #: _____



A ChefBase four drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 610 mm high and 815 mm deep cabinet has a worktop suitable for placing a grill or other similar kitchen equipment, and comes complete with a marine edge. The fridge can be positioned on the supplied castors, on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 705 mm. The four GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge has a built-in, integral refrigeration system with side-mounted condensing unit, and uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. A controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more comes included. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel



GN-compatible



SKOPE-connect

© 2023 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com


AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com

PSS1104 | Rev. 1.1 | Oct. 2023



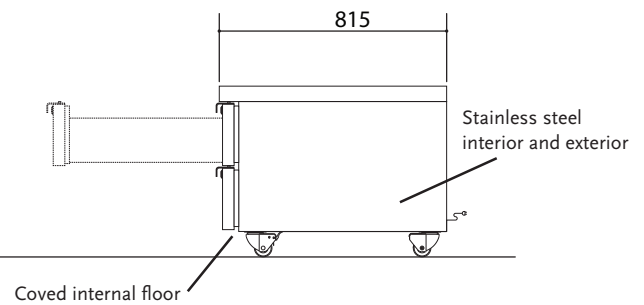

Two Drawer, One Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR1-A3

Dimensions: 835 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 126 L

Project: _____

Item #: _____



A two drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The two GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either a solid door or three GN drawer bay. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

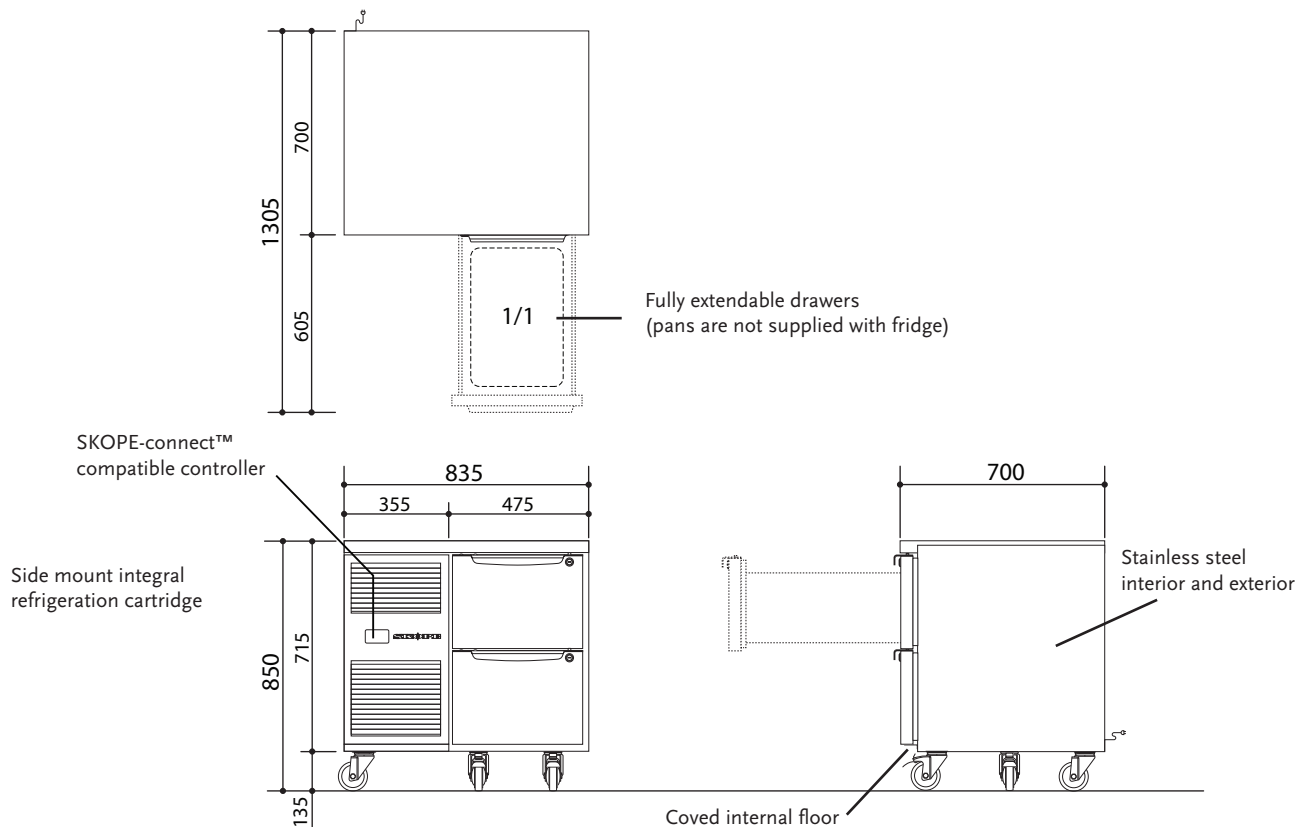**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	835	360	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)	605	TBC
	860 to 900 (legs)		
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	126		
Footprint (m²)	0.58		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	7	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.26 kWh/24 h	
Annual Running Costs	\$138 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	50	Peak 55
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.1.D2
on the SKOPE website

Two Drawer, One Bay, Underbench GN1/1 Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR1-B3

Dimensions: 835 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 126 L

Project: _____

Item #: _____



A two drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The two GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either a solid door or three GN drawer bay. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

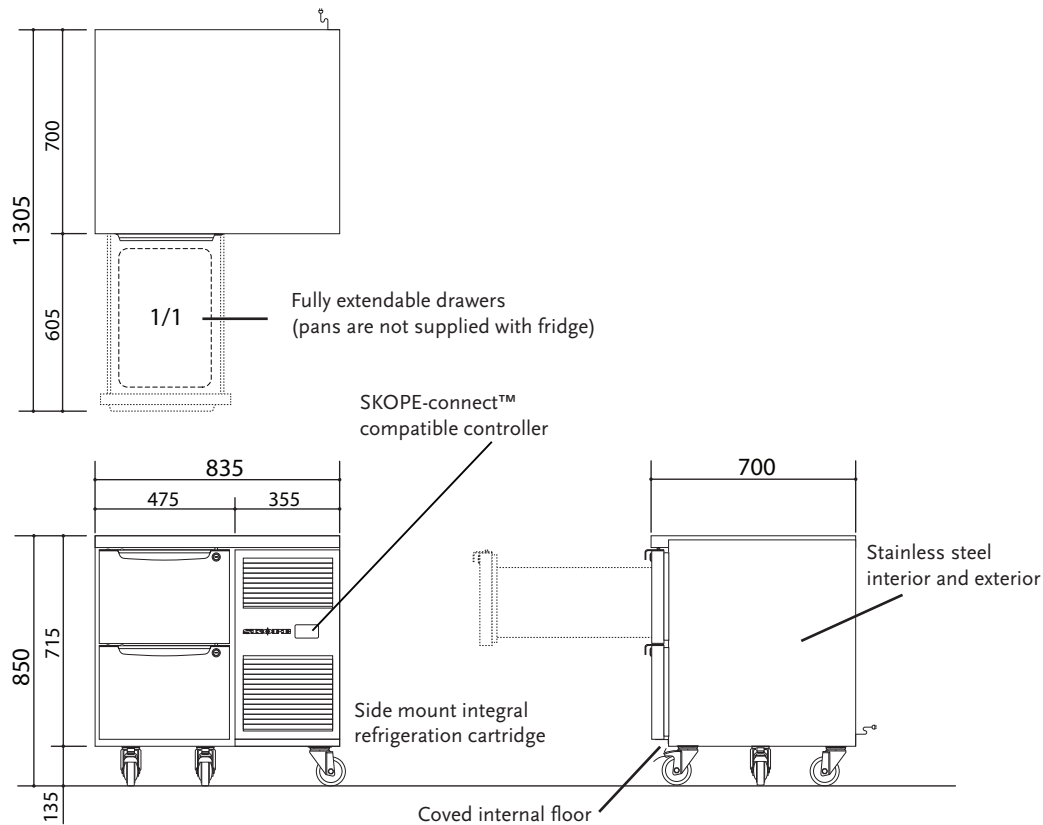

Cabinet

Type	Underbench				
Finish	304 AISI stainless steel				
Insulation	Type	PU foam			
	Thickness (mm)	50			
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)			
Drawers	Lock	Barrel lock			
	Width (mm)	300	Depth (mm)	525	Height (mm) 200
Gastronorm	Size	1/1			
Lighting*	None				

Dimensions†

	External	Internal	Packed
Width (mm)	835	360	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		TBC
	860 to 900 (legs)	605	
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	126		
Footprint (m²)	0.58		

Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	7	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.26 kWh/24 h	
Annual Running Costs	\$138 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	50	Peak 55
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.1.D2.RH
on the SKOPE website

Three Drawer, One Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR1-A4

Dimensions: 835 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 126 L

Project: _____

Item #: _____



A three drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The three GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either a solid door or a two GN drawer bay. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

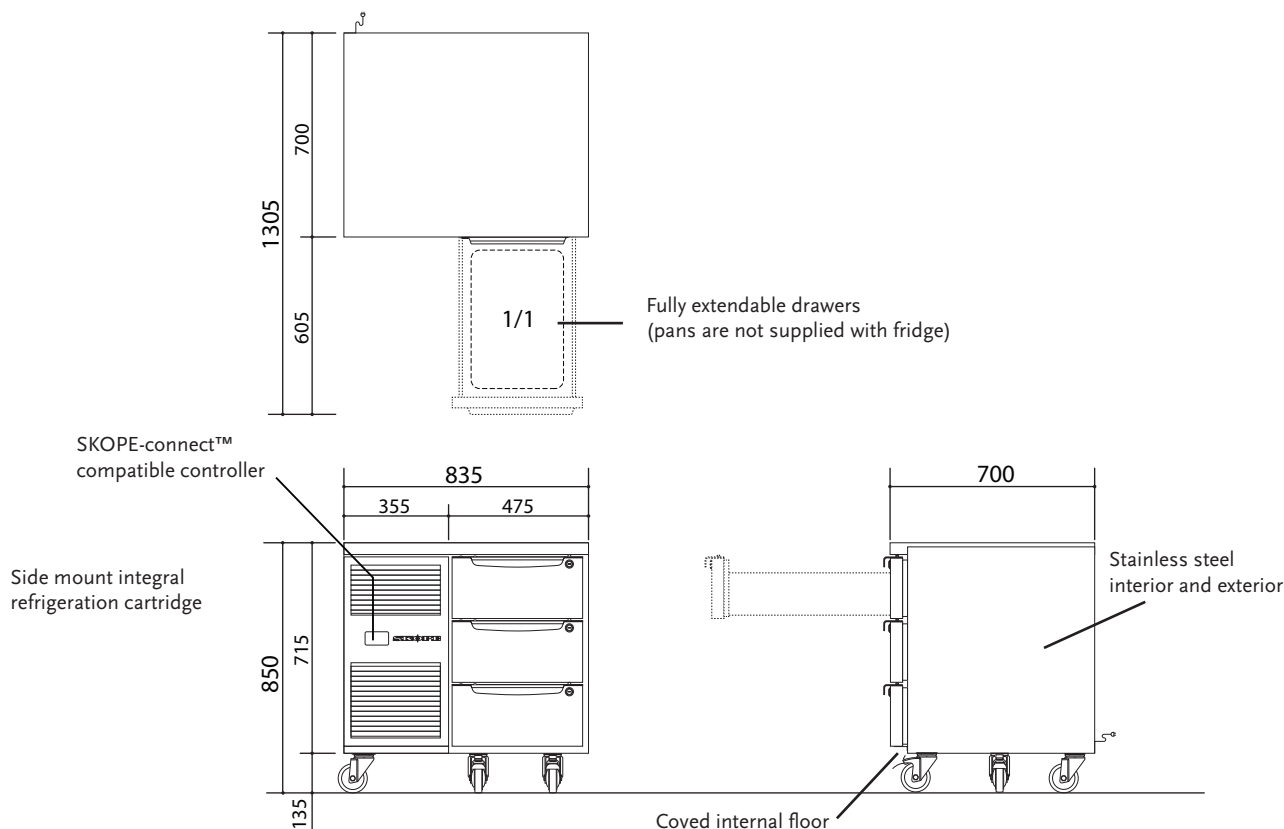**Cabinet**

Type	Underbench				
Finish	304 AISI stainless steel				
Insulation	Type	PU foam			
	Thickness (mm)	50			
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)			
Drawers	Lock	Barrel lock			
	Width (mm)	300	Depth (mm)	525	Height (mm) 100
Gastronorm	Size	1/1			
Lighting*	None				

Dimensions†

	External	Internal	Packed
Width (mm)	835	360	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	126		
Footprint (m²)	0.58		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	6	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.42 kWh/24 h	
Annual Running Costs	\$155 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	60	Peak 65
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.1.D3
on the SKOPE website

Three Drawer, One Bay, Underbench GN1/1 Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR1-B4

Dimensions: 835 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 126 L

Project: _____

Item #: _____



A three drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The three GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either a solid door or a two GN drawer bay. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel




GN-compatible



SKOPE-connect

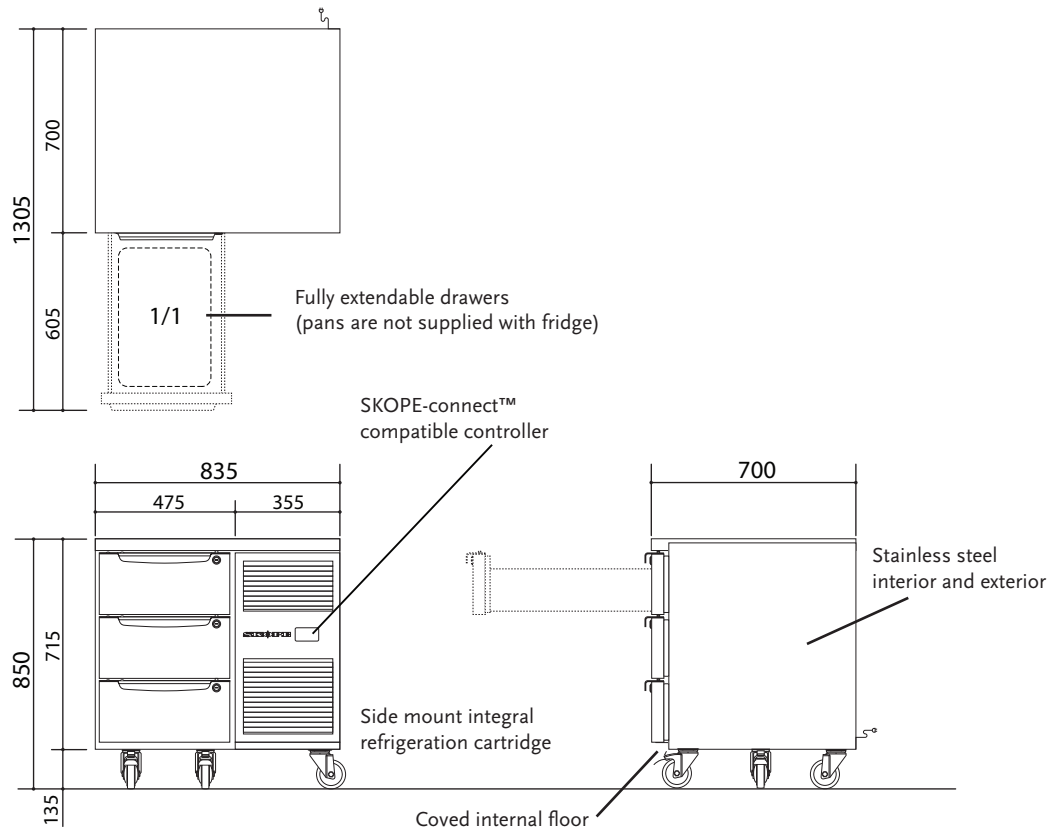

**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	835	360	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	126		
Footprint (m²)	0.58		

Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	6	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.42 kWh/24 h	
Annual Running Costs	\$155 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	60	Peak 65
Defrost Type	Automatic, electric		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG11.UBR.1.D3.RH
on the SKOPE website

Four Drawer, Two Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR2-A3

Dimensions: 1290 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 288 L

Project: _____

Item #: _____



A four drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The four GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or three GN drawer bays. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel



GN-compatible



SKOPE-connect

© 2023 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com


AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com

PSS1122 | Rev. 1.1 | Oct. 2023

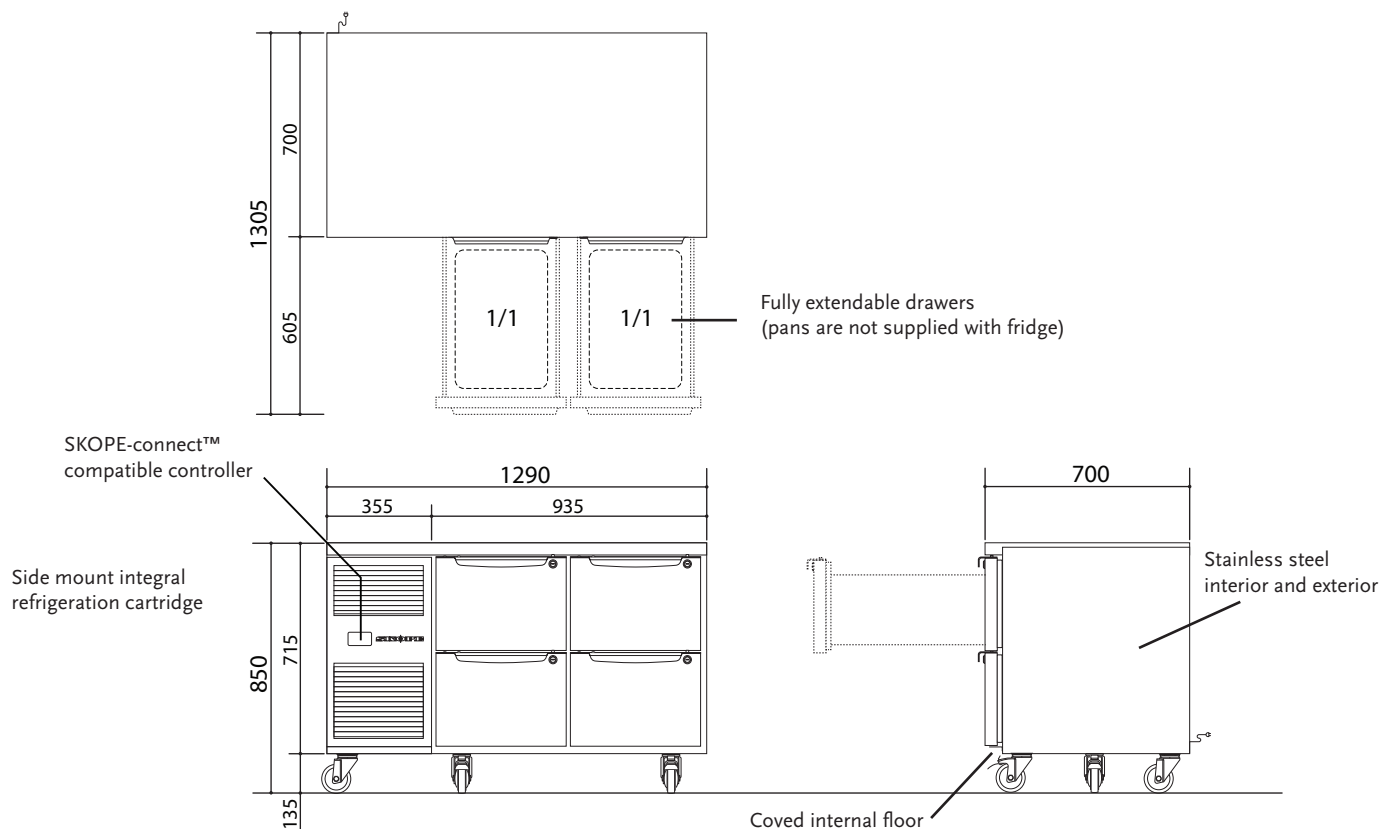

**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1290	820	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	288		
Footprint (m²)	0.9		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	6	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.79 kWh/24 h	
Annual Running Costs	\$196 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	75	Peak 80
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.2.D4
on the SKOPE website

Four Drawer, Two Bay, Underbench GN1/1 Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR2-B3

Dimensions: 1290 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 288 L

Project: _____

Item #: _____



A four drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The four GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or three GN drawer bays. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

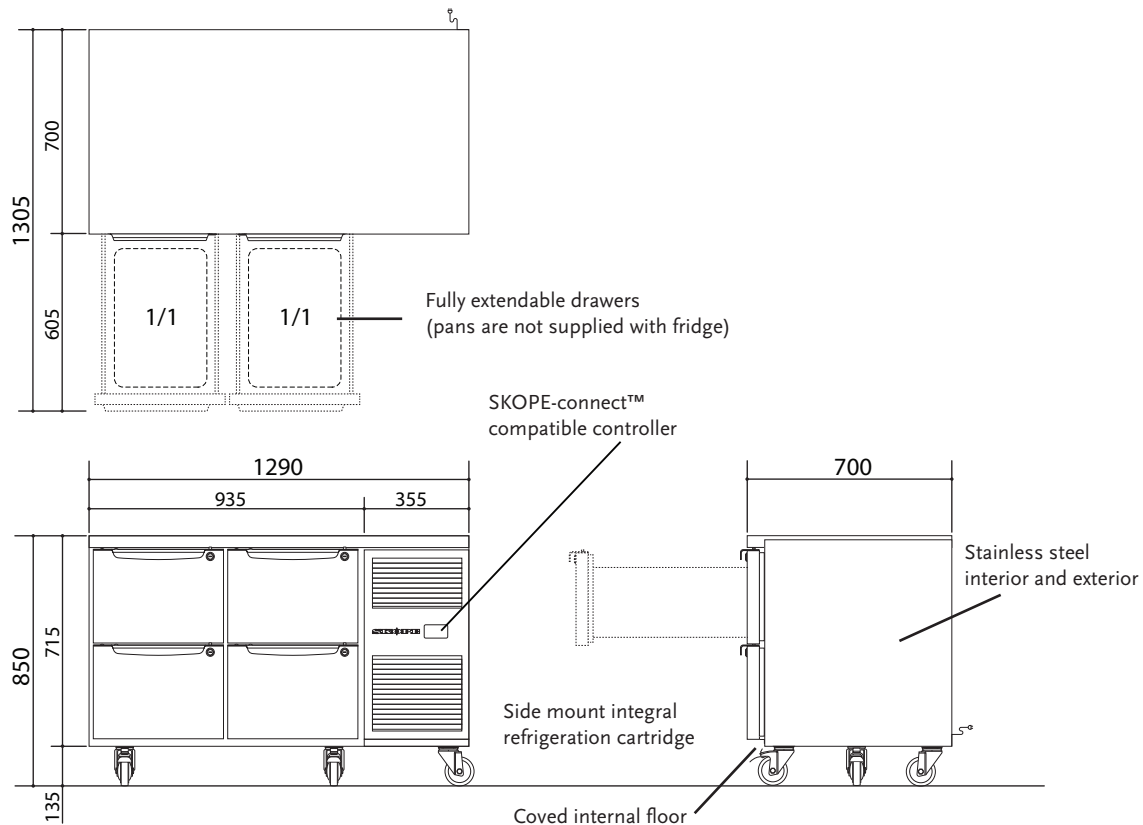

Cabinet

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1290	820	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	288		
Footprint (m²)	0.9		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	61
	Hush Mode*	59

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	6	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	1.79 kWh/24 h	
Annual Running Costs	\$196 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/80 g		
Nominal Capacity (W)	390 (EN12900 MBP)		
Heat Rejection (W)	Average	75	Peak 80
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



* Accessible via the free SKOPE-connect™ app.

PG11.UBR.2.D4.RH
on the SKOPE website

Six Drawer, Three Bay, Underbench GN1/1 Fridge

Range: ProSpec

SKOPE ID: P1BR3-A3

Dimensions: 1750 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 447 L

Project: _____

Item #: _____



A six drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The six GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or three GN drawer bays. The slim left-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Right-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



304 Stainless Steel



GN-compatible



SKOPE-connect

© 2023 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: skope@skope.com

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com



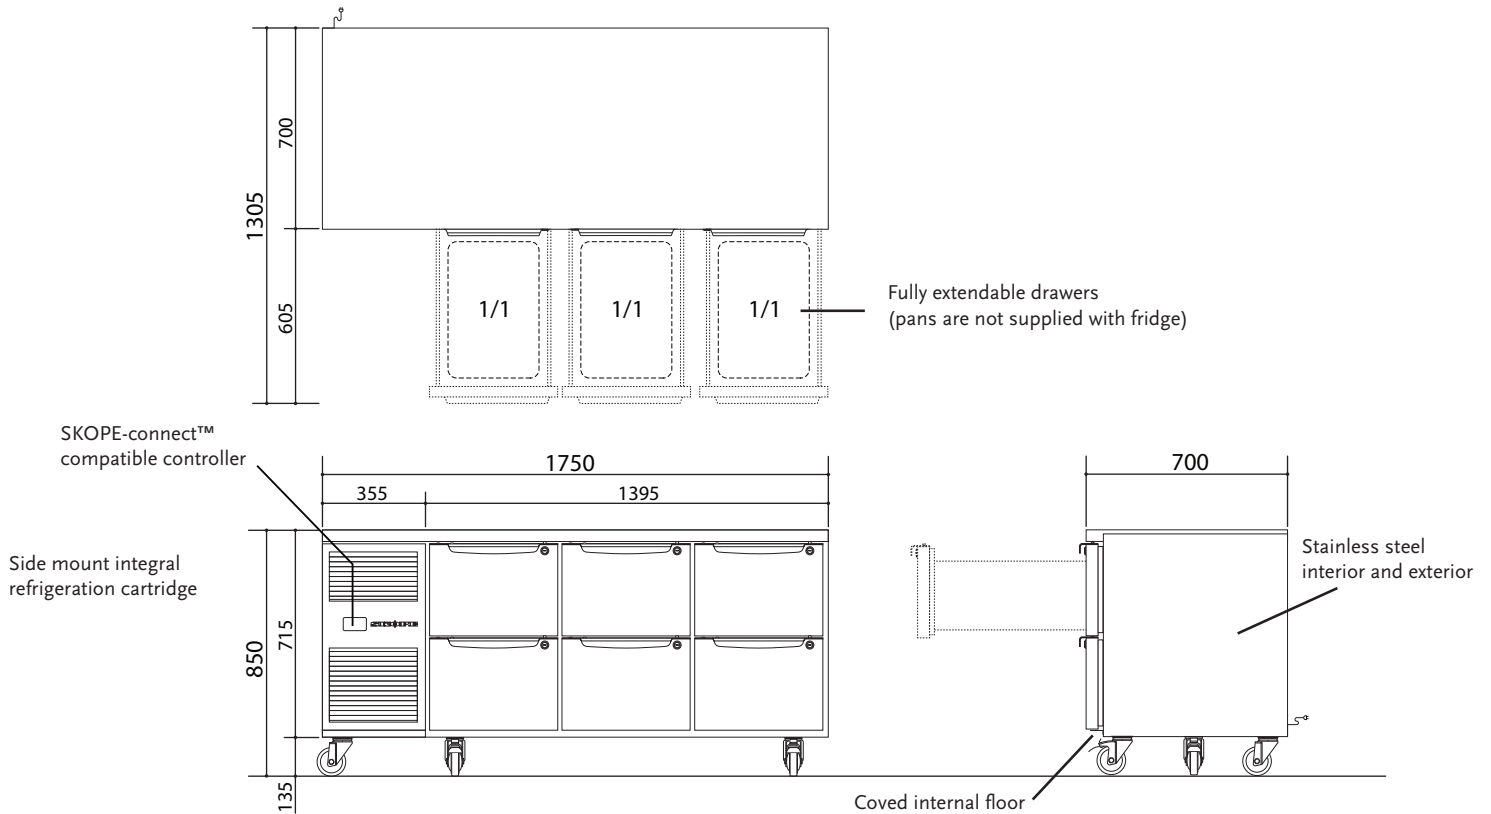

Cabinet

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1750	1275	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	447		
Footprint (m²)	1.23		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	65
	Hush Mode*	63

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	5	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	2.68 kWh/24 h	
Annual Running Costs	\$293 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/95 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	115	Peak 120
Defrost Type	Automatic, electric		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG11.UBR.3.D6
on the SKOPE website

Six Drawer, Three Bay, Underbench GN_{1/1} Right Hand Fridge

Range: ProSpec

SKOPE ID: P1BR3-B3

Dimensions: 1750 mm (W) × 700 mm (D) × 850 mm (H)

Gross Volume: 447 L

Project: _____

Item #: _____



A six drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 mm overall height, it can be positioned under a bench on the supplied castors, positioned on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 900 mm. The six GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge is fully configurable, with the drawers swappable for either solid door or three GN drawer bays. The slim right-hand service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. Left-hand services are also available. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

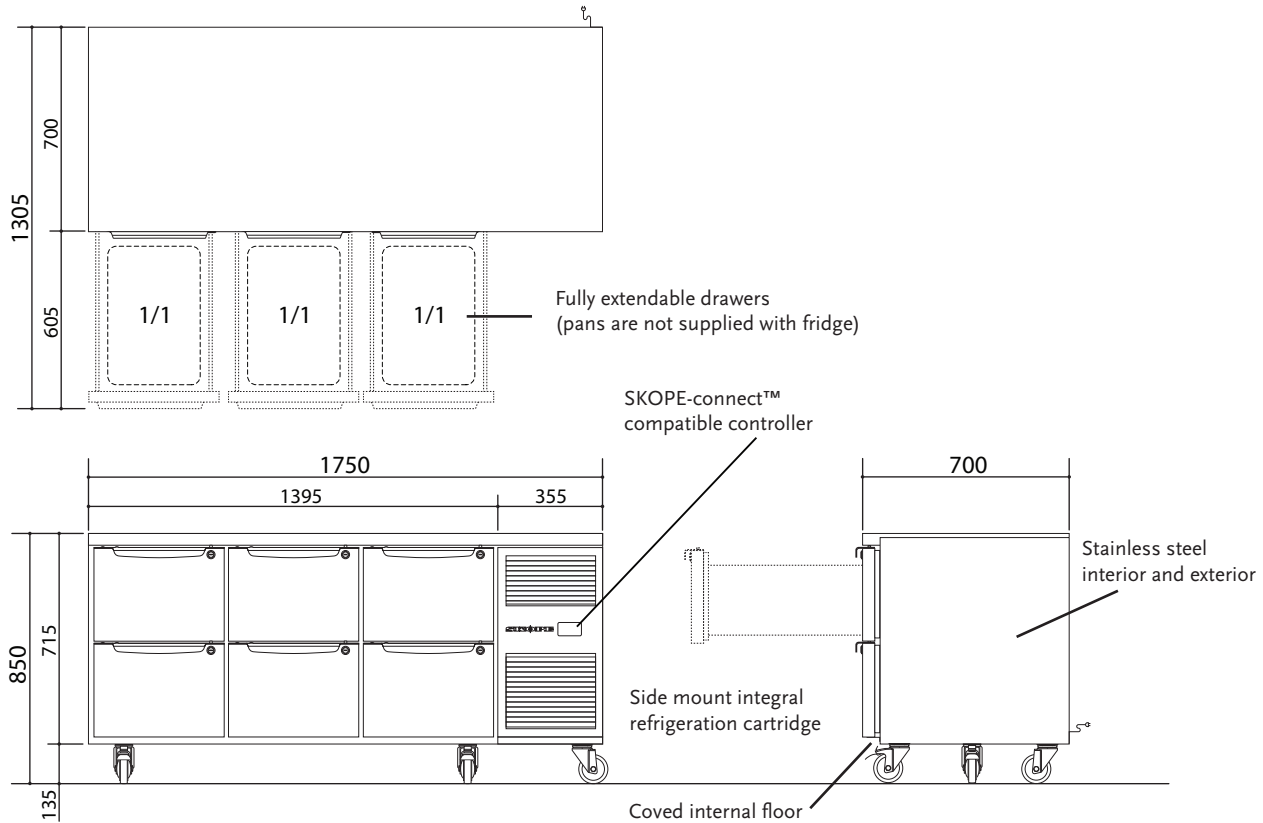**Cabinet**

Type	Underbench		
Finish	304 AISI stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Drawers	Lock	Barrel lock	
	Size	1/1	
Gastronorm	Size	1/1	
Lighting*	None		

Dimensions†

	External	Internal	Packed
Width (mm)	1750	1275	TBC
Depth (mm)	700	580	TBC
Height (mm)	850 (standard castors)		
	860 to 900 (legs)	605	TBC
	715 (plinth mount)		
Weight (kg)	TBC		TBC
Gross Volume (L)	447		
Footprint (m²)	1.23		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from -2 to +15)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	65
	Hush Mode*	63

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	5	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	2.68 kWh/24 h	
Annual Running Costs	\$293 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	2.0	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/95 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	115	Peak 120
Defrost Type	Automatic, electric		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG11.UBR.3.D6.RH
on the SKOPE website