

specifications

SI Refrigeration

PG21.UPR.2.SD

ProSpec Series, 2 Door (Solid), Upright Fridge



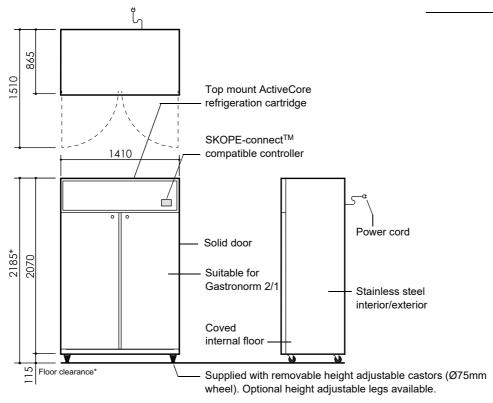

CABINET

Model ID PG21.UPR.2.SD

SKOPE ID PP2R

Doors 2 × self-closing, lockable, solid swing doors
Internal door opening 2 × door openings: 1500mm high × 540mm wide
Shelves 10 × shelves: 530mm wide × 650mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting 2 × 1400mm, 16W LED light (door activated)
Power cord Supplied with 2.3m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (unit 2.6 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connect compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (part

number UTHCNI-0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 180 Watts/260 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2019\ SKOPE\ Industries\ Limited\ and\ alter\ specifications\ without\ notice.}$

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DII	$\backslash I =$	NIC	SIV

External Internal 1500mm 2185mm* Height 1250mm Width 1410mm Depth 865mm 675mm Floor area 1.21m² Weight 230kg Internal volume 1266 litres

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2185-2200mm
Optional height adjustable legs	2220-2250mm
No castors	2070mm

Dimensional tolerances					
Before installing this cabinet allow the following dimensional tolerances:					
Linear dimensions	Overall cabinet dimensions				
Less than 1 metre	±5mm				
More than 1 metre	-5mm to +10mm				
	Length of multiple cabinets				
	At each joint	At each end wall			
Less than 1 metre	±5mm	+15mm			
More than 1 metre	-5mm to +10mm	+15mm			

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0596 Rev. 1.0 Nov. 2019



