



Lira S 2 Groups, Electronica, High Group

Please supply the following before installation day

Water Requirements -

Dedicated stop Valve/tap with inline pressure reduction valve of 350kpa with at the end a 3/8(10mm) fitting. Please place this within 1 metre of the machine. Cold Water
Water filter required, unless supplied with installation.



Power Requirements -

20 Amp single phase within 1 metre of the machine usually below bench.

NB: Preferred to be operated by plug please supply 20 Amp single phase 3 pin switched socket.



Drain Requirements -

Open gravity drain of minimum 5cm in diameter within 1 metre of the machine.
Access required to the drain, to enable blockages to be cleared. We advise a trap in line to be installed by the plumber so to avoid bad ardours from escaping.



Machine Dimensions -

Height: 572 mm

Length: 823 mm

Depth: 571mm

Weight: 70 kg



For Further information please contact:

VCM Vending Coffee Machines

Unit 11 / 93 Hector Street West


Osborne Park WA 6017

Ph: 08 9 244 1900

Fax: 08 9 244 1911

service@vcmpertth.com.au

Countertop Drain Hole Location

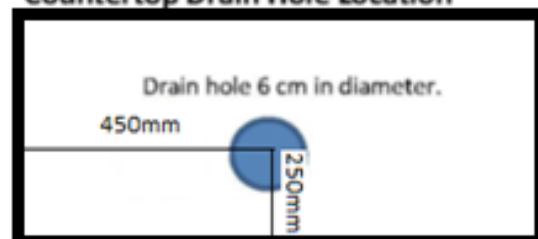

Please note that these requirements must be in place when the installer arrives.

Failure to have the site ready will result in additional service charges and may cause installation delays.