

PW3

Wide Body Passthrough Warewasher

W 1305mm x D 920mm x H 1755mm



The PW3 passthrough warewasher washes large objects such as crates, bins and bowls and sanitises with a high temperature final rinse. Usually installed into benches for easy pass-through operation with no lifting required.

Standard Features

- Upper and lower stainless steel arms with removable end caps for cleaning
- Auto start on door closure
- FastClean - rounded wash tank, double filtration, scrap and pump inlet filters
- Flush front design
- Large internal chamber
- Robust stainless steel construction
- Electromechanical controls
- Watermark Certified
- NEW low water consumption of only 4 litres of water per cycle
- 2 x 1.5kW wash pump recirculates wash water at 1600 litres of water per minute
- 10kW rinse and 5kW wash heating
- Triple Cycle Selection - 2, 4 or 6 minute cycles
- Powerful rinse booster elements ensure fast recovery between cycles
- 650mm high wash chamber clearance
- Full access to wash chamber via 3 sided door
- Counter-sprung for easy action door lift
- 220mm stainless steel legs for access beneath machines
- Loads 2 x 500mm international racks
- Fits 850mm bench depth

Accessories

- 1 x 500mm Dish Rack
- 1 x 500mm Cup Rack
- 1 x 8 Division Cutlery Container
- 1 x 435mm Cup Cover

Optional accessories


- Customised Wash Carriage



WASHTECH®
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech pass-through warewasher with Watermark Certification. The unit shall have automatic fill and low level wash pump and element protection and start automatically on door closure. It shall be fitted with operator selectable 2, 4 and 6 minute complete operating cycles. The usable internal wash chamber shall be 650mm high by 640mm deep by 1050mm wide. The unit shall be fitted with rotating upper and lower all stainless steel wash and rinse arms all with removable end plugs for cleaning. The unit shall be fitted with dual 1.5kW wash pumps and hot water consumption shall be 4 litres per operating cycle. The unit shall require connection to 30amp 3 phase 5 wire electrical supply. The unit shall be supplied with 500mm cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg option in use.

WASHTECH®

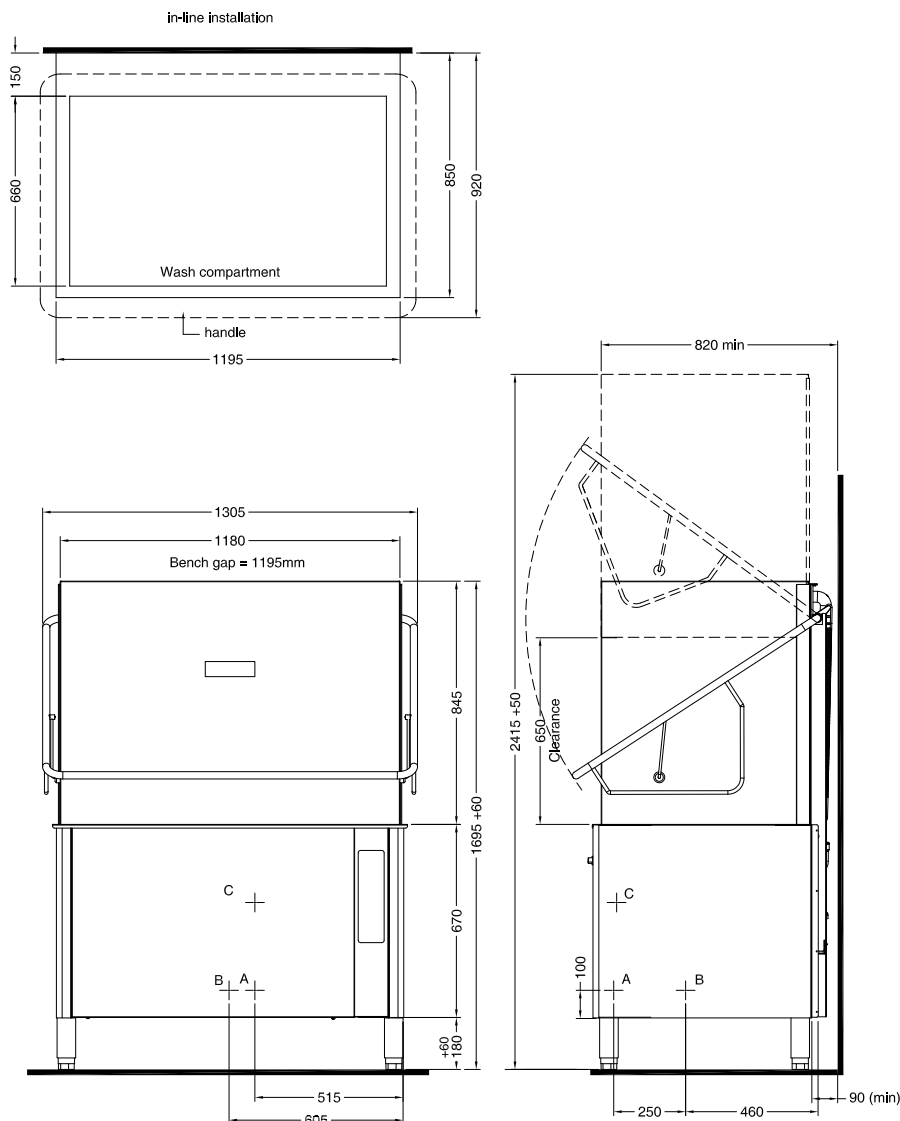

A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 20l/min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	3 phase N+E 415V 50Hz	18kw, 30A/phase

Refer operator manual for complete installation instructions.

Dimensions

Width	1305mm
Depth	920mm
Height	1755mm
Weight	220kg

Packed Dimensions

Width	1450mm
Depth	1050mm
Height	1770mm
Weight	276kg
Cubicmetres	2.63m³

MOFFAT®

Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



© Copyright Moffat Ltd
Moffat /1213/511

