

Product Catalogue 2025



Industry Leaders in Plug-in Commercial Refrigeration



Refrigeration Specialists

Over 24 years, we have curated a range that spans the wide spectrum of plug-in refrigeration equipment to meet the needs of businesses in hospitality, retail, and healthcare sectors.



Expert Local Support

We offer a tailored equipment solution, taking into consideration your specific needs. We then connect you with a trusted local dealer who stocks the units you require.



Confident Compliance

Our in-house engineering team ensures that our products meet and exceed Australian standards and regulations, including MEPS, GEMS, RCM, Watermark, and others.



Energy Efficiency and Sustainability

We proudly lead the way with our Green Cooling initiative. 90% of our range utilises natural refrigerants, which are highly energy-efficient and have a close to 0 GWP (Global Warming Potential).



Available Australia-wide

With a nationwide distribution network, we can deliver our refrigeration products to your door quickly and efficiently.



5 Year Extra Care Warranty Service

We offer a one-stop support service for your peace of mind, no matter where you are in Australia.

Legend



NON-PERISHABLE
DRINKS



DAIRY PRODUCTS



PERISHABLE
PRODUCTS



BAKERY/CONFECTIONERY



HOT FOODS



ICE CREAM/GELATO



FROZEN PRODUCTS



MEDICAL PRODUCTS

ICE TYPES



SOLID ICE



HOLLOW ICE



HALF-DICE ICE



FLAKE ICE



Contents



92

108





64

118

COUNTERTOP MERCHANDISERS	4
VERTICAL DISPLAY & STORAGE	10
BAR CHILLERS & FREEZERS	38
PIZZA PREP	62
CHEST FREEZERS	68
GELATO DISPLAYS	78
MULTIDECK DISPLAYS	84
DELICATESSEN DISPLAYS	100
FOOD DISPLAYS	110
ICE MACHINES	128
MEDICAL REFRIGERATION	146





Countertop Display Fridges & Freezers

Increase impulse sales with Bromic's Countertop Display Fridges and Freezers. These products are designed for efficiency, offering consistent, energy-saving cooling. They're an ideal choice for businesses aiming to enhance their point of sale areas.

Countertop Display Fridges

Our Countertop Display Fridges provide stunning displays and efficient operation to reduce running costs. Equipped with 4-side LED lighting, they beautifully illuminate your drinks, creating an exceptional presentation.

Enjoy high energy efficiency and cost savings with a 8-star GEMS rating, thanks to the use of natural refrigerant

Customise your display to fit cans and bottles of various height with adjustable shelves, featuring a corrosion-resistant coating and ventilation guards for proper airflow


Illuminate your products from all angles with 4-side LED lighting, ensuring that your drinks are beautifully presented and easily seen by customers

Double-glazed safety glass on all sides reduces heat transfer ensuring optimal cooling performance while keeping your energy consumption in check

Reduce power consumption by using the on/off switch for the lighting and cooling, giving you the flexibility to turn off specific functions when not needed

Digital controller allows for quick temperature adjustment and monitoring



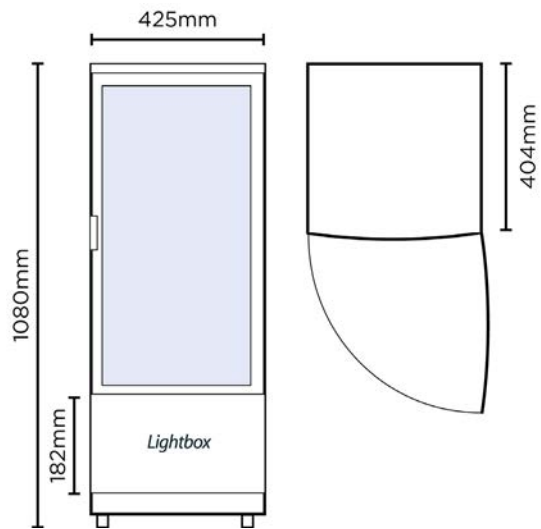

Countertop Display Fridge Curved Glass

CT0100G4BC-NR

Part No.	Volume	Weight	
3735192-NR	98L	41kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	425	367	480
Depth	404	306	450
Height	1080	785	1135

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +2°C to +8°C
- Max ambient temp: 32°C
- 8 stars GEMS rating
- 4H1 climate class
- 5 shelf tiers including base for optimal product display
- 4-side LED lighting



ModelCT0100G4BC-NR	
Part Number	3735192-NR
Ext. Width (mm)*	425
Ext. Depth (mm)*	404
Ext. Height (mm)*	1080
Volume	98L
Unit Weight	41kg
Adjustable Temp. Range	+2°C to +8°C
Max. Ambient Temp.	32°C
Climate Class	4H1
Energy Consumption	3.262kWh/24h
GEMS Star Rating	8 stars
Refrigeration Capacity	180W
Rated Current	1.2A
Electrical Voltage	220-240V
Refrigerant	R600a
Frequency	50Hz
Power Supply	Single Phase
Power Plug	1 x 10A
Plug Location	Rear, bottom right
Features	
Internal Light	LED
Number of Doors	1
Door Type	Glass
Door Glass Type	Double Glazed
Door Style	Hinged
Door Swing Dimension	425mm
Total Depth of Door Open	811mm
Self-Closing Door	No
Door Lock	Yes
Number of Shelf Tiers incl. Base	5
Shelf Type	Adjustable
Shelves Dimensions	-
Temp. Controller	Digital
Feet / Castors	No
Colour	Black
Warranty	
Parts & Labour (Years)	5
Bromic Extra Care	Yes





Lead with purpose,
leave meaning

BROMIC

BROMIC

BROMIC

BROMIC

BROMIC



Upright Fridges & Freezers

Bromic's Upright Fridges and Freezers have been engineered with durability, practicality, and food safety compliance in mind. Choose from glass door display models that entice customers to purchase, or solid door units that are built to withstand the rigorous of demanding commercial kitchen environments.

Upright Display Fridges

Our Display Fridges are designed to boost impulse sales by beautifully showcasing chilled products for quick customer access. Built to perform in Australia's heat and with energy efficiency in mind, you can tailor your space with a selection of colours, sizes, and door options.

Customisable illuminated lightbox offers a fantastic opportunity to showcase your brand and attract customers' attention

The Cassette System allows for simple on-site maintenance, minimising downtime

The fridge is suitable for storage of perishable drinks and food, with 3M1 climate class

High-impact LED internal lighting on each side ensures that your products are perfectly illuminated, making them look their best and enticing customers to make a purchase

The double-glazed glass self-closing doors reduce heat keeping condensation at bay and ensuring your products are clearly visible

Adjustable shelves, you can easily customise the layout to accommodate drinks or items of different sizes and shapes


Reduce your energy consumption and operating costs, while also minimising your environmental impact thanks to natural refrigerant



With lockable castors, you can easily move and position the fridge wherever it best suits your floor layout

The digital temperature controller and display allow you to easily set and maintain the ideal temperature for your products, ensuring their freshness and quality



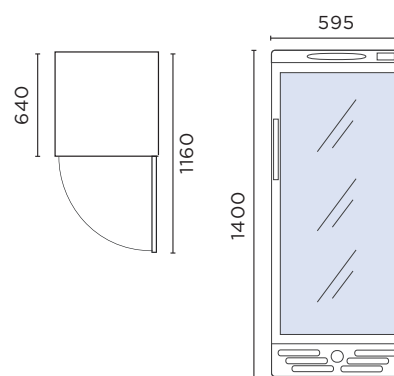


Upright Display Fridge (Flat Glass Door)

GM0220-NR

Part No.	Volume	Weight
3736033-NR	215L	68kg

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 4 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1400	1025	1480

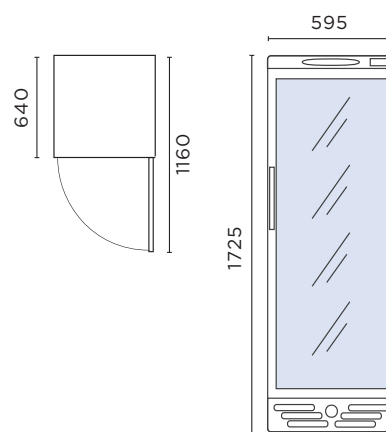5 YEAR EXTRA CARE WARRANTY


Upright Display Fridge (Flat Glass Door)


GM0300-NR

Part No.	Volume	Weight
3736034-NR	290L	74kg

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 5 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1725	1355	1810

5 YEAR EXTRA CARE WARRANTY

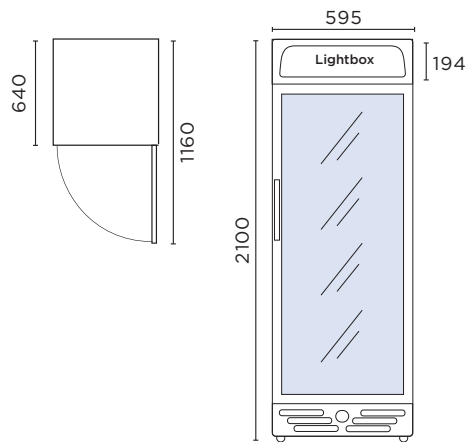


Upright Display Fridge (Flat Glass Door)

GM0374L-NR

Part No.	Volume	Weight	
3736036-NR	372L	85kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	2100	1555	2150

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

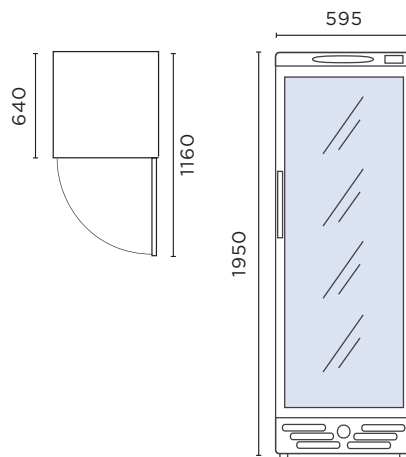

Upright Display Fridge (Flat Glass Door)


GM0374-NR

Part No.	Volume	Weight	
3736035-NR	372L	81kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1950	1555	2010

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



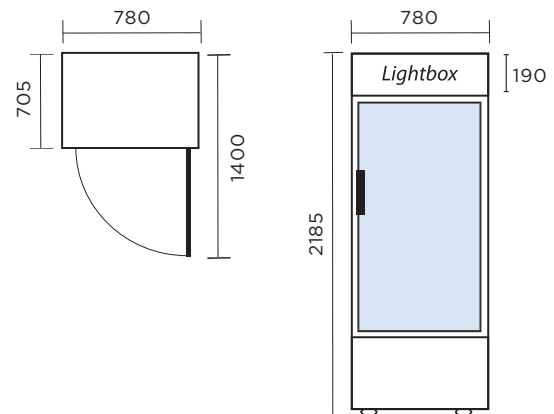


Upright Display Fridge (Flat Glass)

GM0690LW

Part No.	Volume	Weight	
3736219	659L	123kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	780	702	870
Depth	705	555	750
Height	2185	1682	2200

- Temperature range: +1°C to +5°C
- Max. ambient temp: 43°C
- 7 stars GEMS rating
- 3M1 climate class
- 6 shelves tiers including base for optimal product display
- Lightbox included
- Double glazed Low-E argon glass door reduces energy consumption and condensation

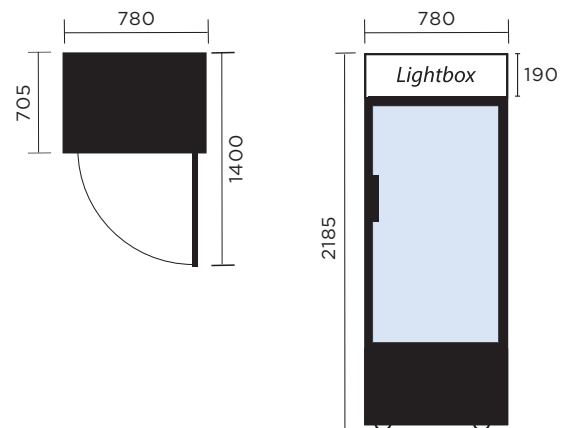5 YEAR EXTRA CARE WARRANTY


Upright Display Fridge (Flat Glass)

GM0690LB



Part No.	Volume	Weight	
3736222	659L	123kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	780	702	870
Depth	705	555	750
Height	2185	1682	2200

- Temperature range: +1°C to +5°C
- Max. ambient temp: 43°C
- 7 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included
- Double glazed Low-E argon glass door reduces energy consumption and condensation

5 YEAR EXTRA CARE WARRANTY

lead with purpose
leave meaning

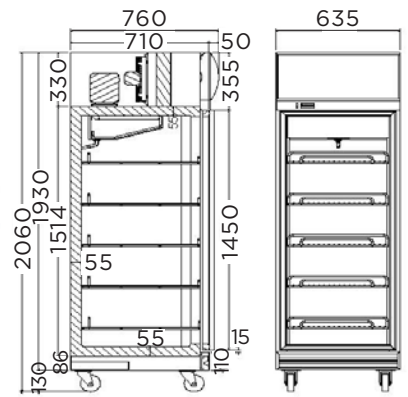



**Upright Display Fridge (Flat Glass)****GD0500LF**

Part No.	Volume	Weight
3736245	444L	95kg
External (mm)	Internal (mm)	Packaged (mm)
Width 635	520	700
Depth 760	550	820
Height 2060	1420	2116

5 YEAR EXTRA CARE WARRANTY



- Temperature range: +2°C to +8°C
- Max. ambient temp: 38°C
- 1 star GEMS rating
- 3M2 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

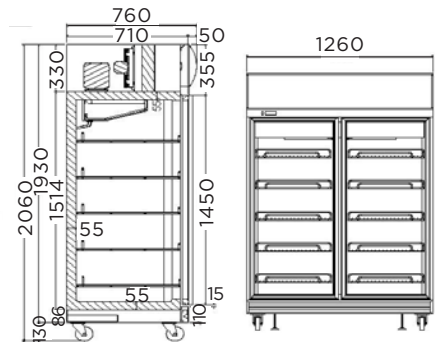**Upright Display Fridge 2 Door (Flat Glass)****GD1000LF**

Part No.	Volume	Weight
3736246	976L	157kg
External (mm)	Internal (mm)	Packaged (mm)
Width 1260	1143	1330
Depth 760	550	820
Height 2060	1420	2100

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +2°C to +8°C
- Max. ambient temp: 38°C
- 3 stars GEMS rating
- 3M2 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

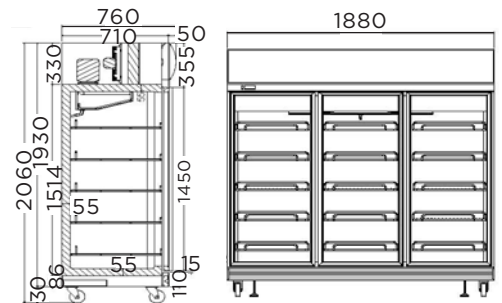
**Upright Display Fridge 3 Door (Flat Glass)****GD1500LF**

Part No.	Volume	Weight
3736247	1507L	209kg
External (mm)	Internal (mm)	Packaged (mm)
Width 1880	1755	1950
Depth 760	550	820
Height 2060	1420	2130

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +2°C to +8°C
- Max. ambient temp: 38°C
- 1 star GEMS rating
- 3M2 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included



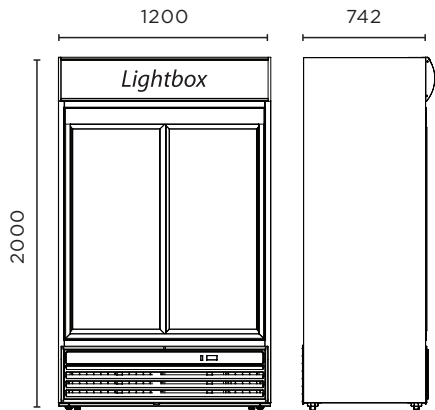



Upright Display Fridge (Sliding Glass Door)

GM0980LS-NR

Part No.	Volume	Weight
3735048-NR	945L	210kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	742	572
Height	2000	1533
	Packaged (mm)	
	1260	790
	2160	

- Temperature range: +1°C to +10°C
- Maximum ambient temperature: 40°C
- 4 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

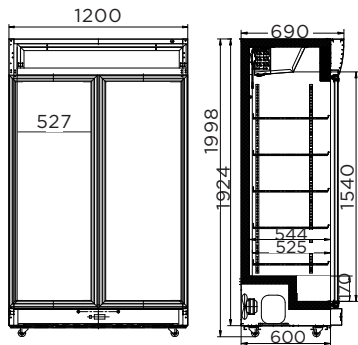


Upright Display Fridge Eco (Flat Glass Door)

GM0900LBECO

Part No.	Volume	Weight
3736259-NR	885L	177kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	690	545
Height	1998	1707
	Packaged (mm)	
	1270	754
	2115	

- Temperature range: -1°C to +7°C
- Max. ambient temp: 25°C
- 4 stars GEMS rating
- 3M2 climate class
- 5 shelf tiers for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

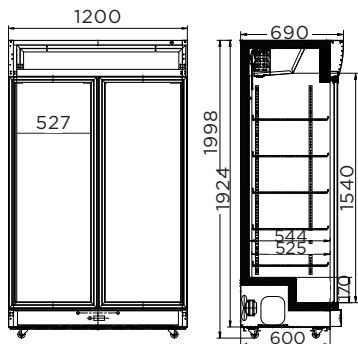


Upright Display Fridge Eco (Flat Glass Door)

GM0900LWECO

Part No.	Volume	Weight
3736258-NR	885L	177kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	690	545
Height	1998	1707
	Packaged (mm)	
	1270	754
	2115	

- Temperature range: -1°C to +7°C
- Max. ambient temp: 25°C
- 4 stars GEMS rating
- 3M2 climate class
- 5 shelf tiers for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

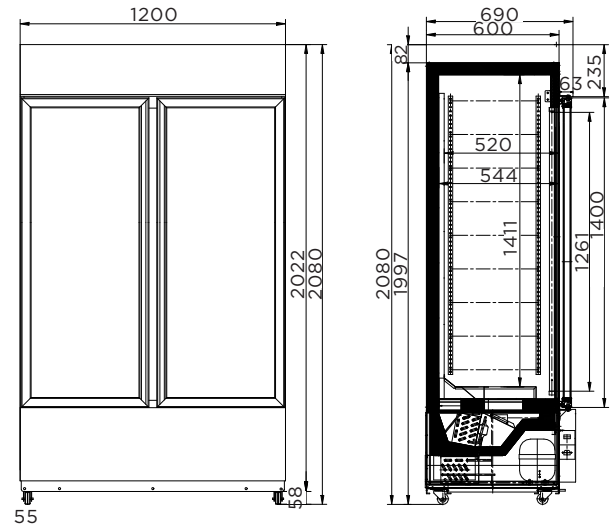

Upright Display Fridge Cassette 2 Doors

GM1000LBCAS

Part No.	Volume	Weight
3736251	960L	188kg


	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1270
Depth	690	545	755
Height	2080	1465	2112

- Temperature range: +2°C to +5°C
- Max. ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY



REMOVABLE CASSETTE

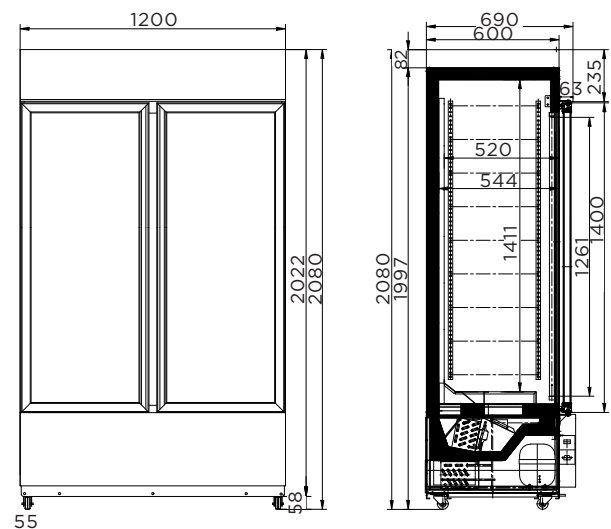

Upright Display Fridge Cassette 2 Doors

GM1000LWCAS

Part No.	Volume	Weight
3736250	960L	188kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1270
Depth	690	545	755
Height	2080	1465	2112

- Temperature range: +2°C to +5°C
- Max. ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY



REMOVABLE CASSETTE

Premium Upright Display Range

Crafted for excellence, these upright fridges combine sleek design with high energy efficiency. Discover a new era in sustainable refrigeration.

Customisable illuminated lightbox offers a fantastic opportunity to showcase your brand and attract customers' attention

The fridge is suitable for storage of perishable drinks and food, with 3M1 climate class

High-impact LED internal lighting on each side ensures that your products are perfectly illuminated, making them look their best and enticing customers to make a purchase

Argon filled Low-E double glazed glass for improved condensation performance


Adjustable shelves you can easily customise the layout to accommodate drinks or items of different sizes and shapes

Reduce your energy consumption and operating costs, while also minimising your environmental impact thanks to natural refrigerant



Thanks to castors, you can easily move and position the fridge wherever it best suits your floor layout


Powered by a powerful fan-forced refrigeration technology, the fridge ensures even distribution of cool air, keeping your products uniformly chilled

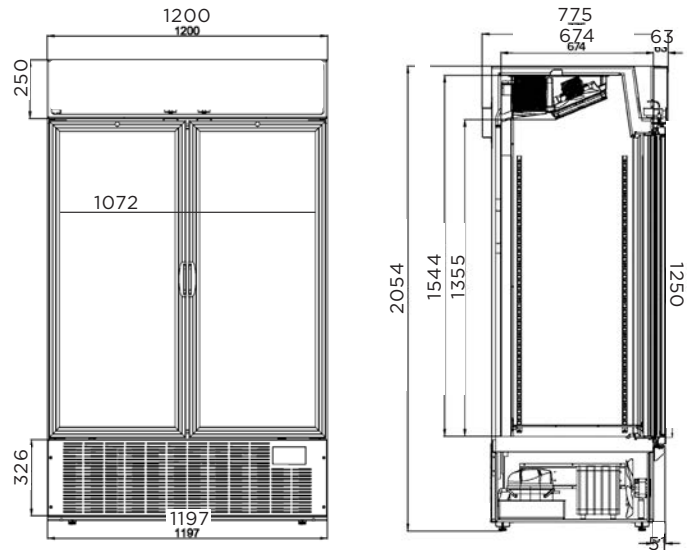**Upright Display Chiller Silver****GM1100LS-NR****Upright Display Chiller Black****GM1100LB-NR**

Part No.	Volume	Weight
3736234	1082L	195kg
3736235	1082L	195kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 43°C
- 8 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1240
Depth	775	674	790
Height	2054	1250	2120

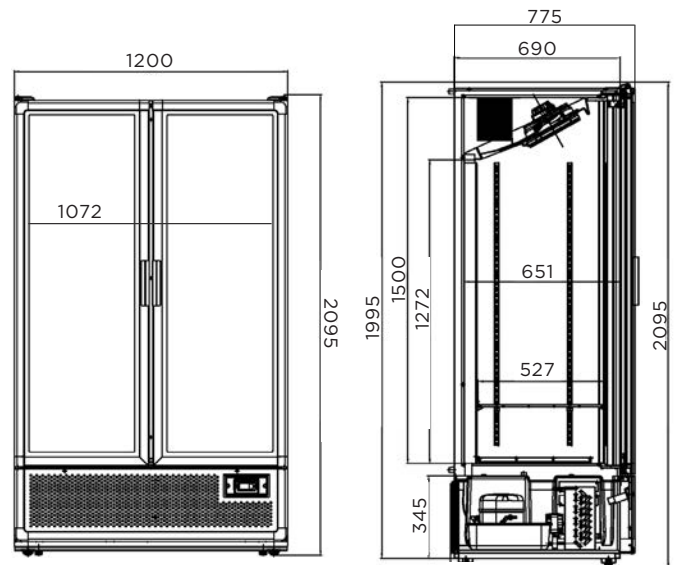5 YEAR EXTRA CARE WARRANTY**SPECIAL ORDER****Upright Display Chiller Silver****GM1100S-NR****Upright Display Chiller Black****GM1100B-NR**

Part No.	Volume	Weight
3736236	1126L	195kg
3736237	1126L	195kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 43°C
- 8 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1240
Depth	775	674	790
Height	2095	1500	2120

5 YEAR EXTRA CARE WARRANTY**SPECIAL ORDER**

Upright Display Freezers

Our Display Freezers combine practicality and style, offering an elegant way to display frozen goods and drive impulse sales. With their durable build, they can withstand the busiest settings, and with a range of door options, they fit neatly into any space.

Customisable illuminated lightbox offers a fantastic opportunity to showcase your brand and attract customers' attention

High-impact LED internal lighting on each side ensures that your products are perfectly illuminated, making them look their best and enticing customers to make a purchase


Adjustable shelves you can easily customise the layout to accommodate display items of different sizes and shapes

The triple-glazed heated safety glass not only improves energy efficiency but also reduces condensation, allowing for a clear view of your products on display

Powered by a powerful fan-forced refrigeration technology, the freezer ensures even distribution of cool air, keeping your products uniformly frozen

With lockable castors, you can easily move and position the freezer wherever it best suits your floor layout



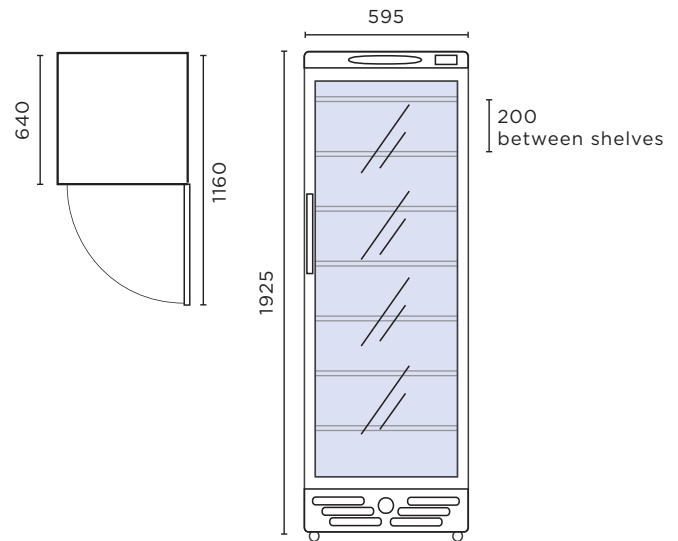

Upright Display Freezer (Flat Glass)


UF0374S-NR

Part No.	Volume	Weight
3736045-NR	300L	100kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	1925	1550	1950

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 4 stars GEMS rating
- 3L1 climate class
- 7 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

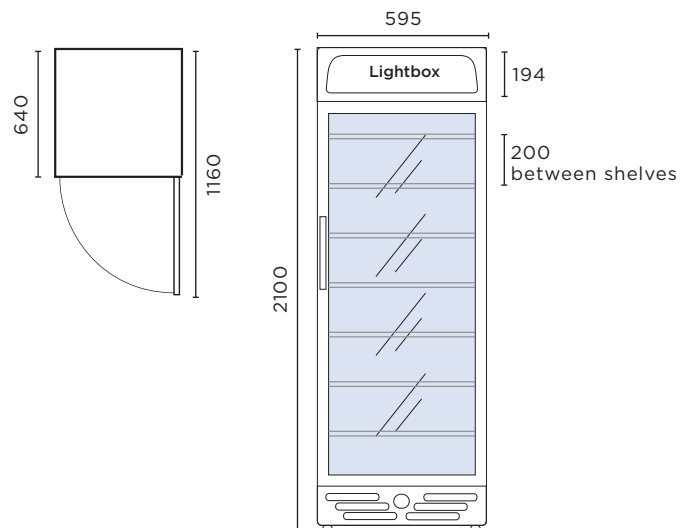

Upright Display Freezer (Flat Glass)



UF0374LS-NR

Part No.	Volume	Weight
3736046-NR	300L	106kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	2100	1550	2100

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 4 stars GEMS rating
- 3L1 climate class
- 7 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

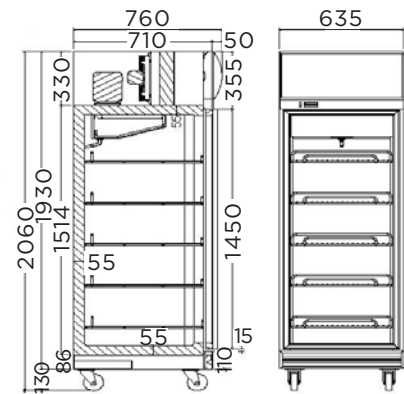


Upright Display Freezer 1 Door

UF0500LF

Part No.	Volume	Weight
3736240	444L	113kg
	External (mm)	Internal (mm)
Width	635	520
Depth	760	550
Height	2060	1420

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 1 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

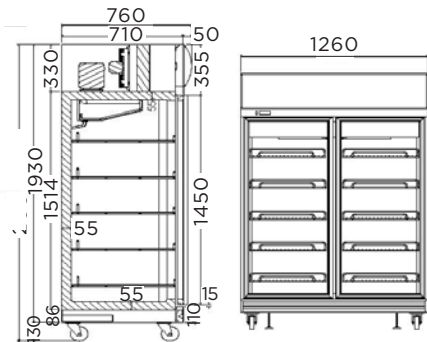


Upright Display Freezer 2 Doors

UF1000LF

Part No.	Volume	Weight
3736241	976L	199kg
	External (mm)	Internal (mm)
Width	1260	1143
Depth	760	550
Height	2060	1420

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

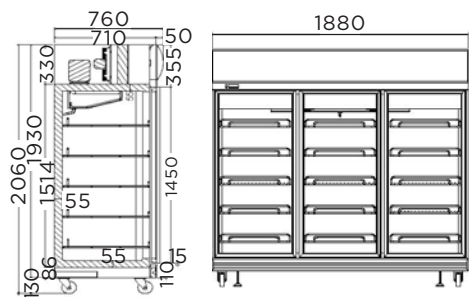

Upright Display Freezer 3 Doors

UF1500LF

Part No.	Volume	Weight
3736242	1507L	279kg
	External (mm)	Internal (mm)
Width	1880	1755
Depth	760	550
Height	2060	1420

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 1 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY





Upright Storage Fridges

Bromic's Storage Fridges are designed for the fast-paced commercial kitchen, engineered for efficiency, and built with high-quality stainless steel for durability. These units boast a spacious interior with convenient shelving and a powerful cooling system.

The digital temperature controller allows you to easily set and maintain the ideal temperature for your products, ensuring their freshness and quality

The internal LED lighting illuminates the interior of the fridge, making it easy to locate and identify specific products, even in low-light conditions


The solid stainless steel insulated exterior and self-closing door minimise heat ingress to maintain the optimal temperature inside the fridge and reduce energy consumption

Adjustable stainless steel shelves that can accommodate 2/1 Gastronorm trays, you can easily organise and customise your storage space to suit your needs

Reduce your energy consumption and operating costs while also minimising your environmental impact thanks to natural refrigerant

With lockable castors, you can easily move and position the freezer wherever it best suits your floor layout



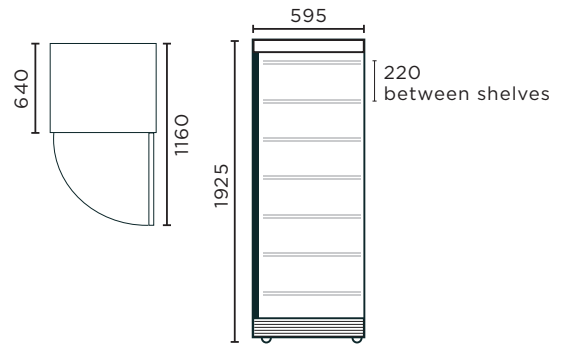


Upright Storage Fridge (Solid Door)

UC0374SDW-NR

Part No.	Volume	Weight	
3735127-NR	372L	88kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1925	1555	2010

- Temperature range: +1°C to +7°C
- Max ambient temp: 40°C
- 4 stars GEMS rating
- 4M1 climate class
- 7 shelf tiers including base for optimal product display

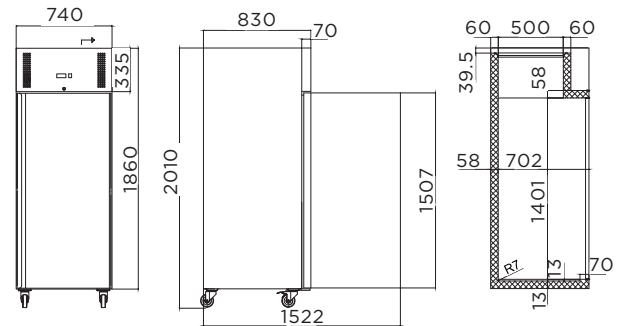
5 YEAR EXTRA CARE WARRANTY


Upright Storage Fridge (Stainless Steel)

UC0650SD-NR

Part No.	Volume	Weight	
3735161-NR	650L	143kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	740	624	769
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 4M1 climate class
- 6 shelf tiers including base for optimal product display

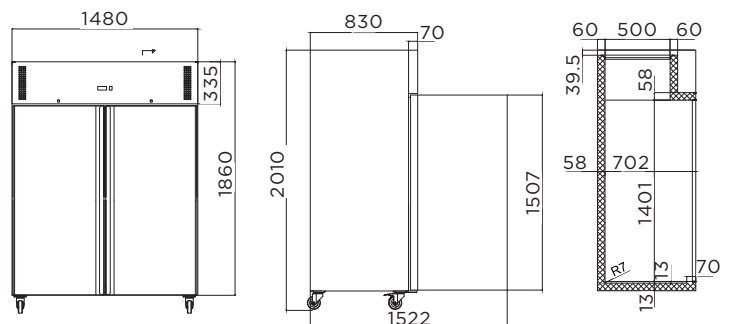5 YEAR EXTRA CARE WARRANTY


Upright Storage Fridge (Stainless Steel)

UC1300SD-NR

Part No.	Volume	Weight	
3735200-NR	1300L	213kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	1480	1360	1510
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 4M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY

Upright Storage Freezers

Constructed from high-quality, durable stainless steel, our Upright Freezers have been specifically designed for use in demanding kitchen environments. They offer a convenient, spacious, and heavy-duty frozen storage solution for perishable foods and beverages.

The digital temperature controller allows you to easily set and maintain the ideal temperature for your products, ensuring their freshness and quality

The internal LED lighting illuminates the interior of the fridge, making it easy to locate and identify specific products, even in low-light conditions


The solid stainless steel insulated exterior and self-closing door minimise heat ingress to maintain the optimal temperature inside the fridge and reduce energy consumption

Stainless steel shelves that can accommodate 2/1 Gastronorm trays, you can easily organise and customise your storage space to suit your needs

Reduce your energy consumption and operating costs while also minimising your environmental impact thanks to natural refrigerant

With lockable castors, you can easily move and position the freezer wherever it best suits your floor layout



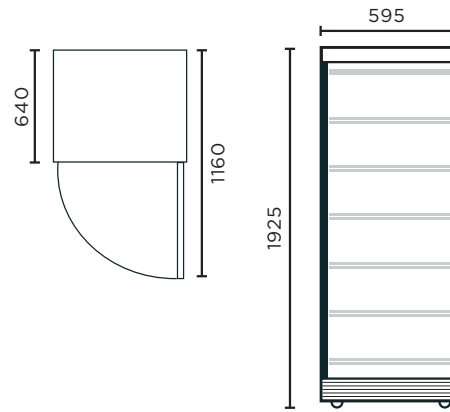

Upright Storage Freezer (Solid Door)

UF0374SDS-NR


Part No.	Volume	Weight	
3735106-NR	300L	97kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	1925	1550	2010

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 7 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



Green Cooling™

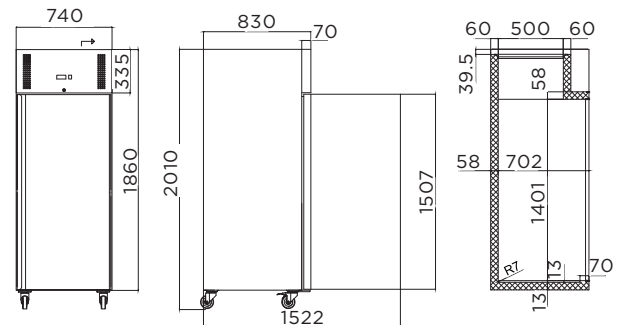

Upright Storage Freezer (Stainless Steel)

UF0650SDF-NR


Part No.	Volume	Weight	
3735203-NR	650L	147kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	740	624	769
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 2 stars GEMS rating
- 4L1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



Green Cooling™

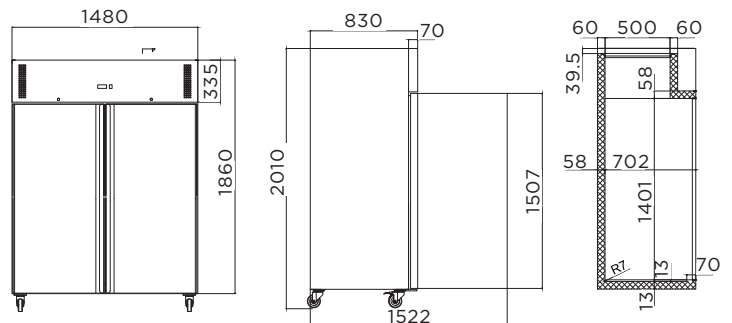

Upright Storage Freezer (Stainless Steel)

UF1300SDF-NR

Part No.	Volume	Weight	
3735194-NR	1300L	226kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	1480	1360	1510
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 4L1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



Green Cooling™



Model	GM0220-NR	GM0300-NR	GM0374-NR	GM0374L-NR
Part Number	3736033-NR	3736034-NR	3736035-NR	3736036-NR
Ext. Width (mm)*	595	595	595	595
Ext. Depth (mm)*	640	640	640	640
Ext. Height (mm)*	1400	1725	1950	2100
Volume	215L	290L	372L	372L
Unit Weight	68kg	74kg	81kg	85kg
Adjustable Temp. Range	+1 to +7°C	+1 to +7°C	+1 to +7°C	+1 to +7°C
Max. Ambient Temp.	40°C	40°C	40°C	40°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	1.9kWh/24h	1.865kWh/24h	1.98kWh/24h	1.98kWh/24h
GEMS Star Rating	9 stars	9 stars	9 stars	9 stars
Refrigeration Capacity	235W	290W	350W	370W
Rated Current	1.18A	1.4A	1.23A	1.23A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R600a	R600a	R600a
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	1	1	1	1
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	600mm	600mm	600mm
Total Depth of Door Open	1160mm	1160mm	1160mm	1160mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	No	No	No	No
No. of Shelf Tiers incl. Base	4	5	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	499(w) x 360(d) mm	499(w) x 360(d) mm	499(w) x 360(d) mm	499(w) x 360(d) mm
Temp. Controller	Analogue	Analogue	Analogue	Analogue
Feet / Castors	Yes	Yes	Yes	Yes
Colour	White with silver trim	White with silver trim	White with silver trim	White with silver trim
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	GM0690LW	GM0690LB
Part Number	3736219	3736222
Ext. Width (mm)*	780	780
Ext. Depth (mm)*	705	705
Ext. Height (mm)*	2185	2185
Volume	659L	659L
Unit Weight	123kg	123kg
Adjustable Temp. Range	+1 to +5°C	+1 to +5°C
Max. Ambient Temp.	43°C	43°C
Climate Class	3M1	3M1
Energy Consumption	3.995kWh/24h	3.995kWh/24h
GEMS Star Rating	7 stars	7 stars
Refrigeration Capacity	485W	485W
Rated Current	3.8A	3.8A
Electrical Voltage	220-240V	220-240V
Refrigerant	R290	R290
Frequency	50Hz	50Hz
Power Supply	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right
Features		
Internal Light	LED	LED
Number of Doors	1	1
Door Type	Glass	Glass
Door Glass Type	Double Glazed Low-E Glass + Argon Gas	Double Glazed Low-E Glass + Argon Gas
Door Style	Hinged	Hinged
Door Swing Dimension	695mm	695mm
Total Depth of Door Open	1400mm	1400mm
Self-Closing Door	Yes	Yes
Door Lock	No	No
No. of Shelf Tiers incl. Base	6	6
Shelf Type	Adjustable	Adjustable
Shelves Dimensions	680(w) x 480(d) mm	680(w) x 480(d) mm
Temp. Controller	Digital	Digital
Feet / Castors	Yes	Yes
Colour	White	Black
Warranty		
Parts & Labour (Years)	5	5
Bromic Extra Care	Yes	Yes



Model	GD0500LF	GD1000LF	GD1500LF	GM0980LS-NR
Part Number	3736245	3736246	3736247	3735048-NR
Ext. Width (mm)*	635	1260	1880	1200
Ext. Depth (mm)*	760	760	760	742
Ext. Height (mm)*	2060	2060	2060	2000
Volume	444L	976L	1507L	945L
Unit Weight	95kg	157kg	209kg	210kg
Adjustable Temp. Range	+2 to +8°C	+2 to +8°C	+2 to +8°C	+1 to +10°C
Max. Ambient Temp.	38°C	38°C	38°C	40°C
Climate Class	3M2	3M2	3M2	3M1
Energy Consumption	17.76kWh/24h	15.3kWh/24h	27.16kWh/24h	8.71kWh/24h
GEMS Star Rating	1 star	3 stars	1 star	4 stars
Refrigeration Capacity	740W	1000W	1132W	850W
Rated Current	4.5A	5.6A	7A	3.94A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R134a	R134a	R134a	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, top right	Rear, top right	Rear, top right	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	1	2	3	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Heated Double Glazed	Heated Double Glazed	Heated Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Sliding
Door Swing Dimension	720mm	720mm	720mm	-
Total Depth of Door Open	1300mm	1300mm	1300mm	-
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	No
No. of Shelf Tiers incl. Base	6	6	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	501(w) x 475(d) mm	546(w) x 475(d) mm	10x 546(w) x 475(d) mm 5x 600(w) x 475(d)mm	1072(w) x 470(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	White with s/steel trim	White with s/steel trim	White with s/steel trim	Black
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	GM0900LBECO	GM0900LWECO	GM1000LBCAS	GM1000LWCAS
Part Number	3736259-NR	3736258-NR	3736250	3736250
Ext. Width (mm)*	1200	1200	1200	1200
Ext. Depth (mm)*	690	690	690	690
Ext. Height (mm)*	1998	1998	2080	2080
Volume	885L	885L	960L	960L
Unit Weight	177kg	177kg	188kg	188kg
Adjustable Temp. Range	-1 to +7°C	-1 to +7°C	+2 to +5°C	+2 to +5°C
Max. Ambient Temp.	25°C	25°C	38°C	38°C
Climate Class	3M2	3M2	3M1	3M1
Energy Consumption	11.79kWh/24h	11.79kWh/24h	6.86kWh/24h	6.86kWh/24h
GEMS Star Rating	4 stars	4 stars	6 stars	6 stars
Refrigeration Capacity	650W	650W	520W	520W
Rated Current	4A	4A	2.3A	2.3A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	2	2	2	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	593mm	593mm	600mm	600mm
Total Depth of Door Open	1193mm	1193mm	1220mm	1220mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	Yes
No. of Shelf Tiers incl. Base	5	5	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	527(w) x 478(d) mm	527(w) x 478(d) mm	527(w) x 478(d) mm	527(w) x 478(d) mm
Temp. Controller	Analogue	Analogue	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Black	White	Black	White
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



SPECIAL ORDER



SPECIAL ORDER

Model	GM1100LS-NR	GM1100LB-NR	GM1100B-NR	GM1100S-NR
Part Number	3736234	3736235	3736237	3736236
Ext. Width (mm)*	1200	1200	1200	1200
Ext. Depth (mm)*	775	775	775	775
Ext. Height (mm)*	2054	2054	2095	2095
Volume	1082L	1082L	1126L	1126L
Unit Weight	195kg	195kg	195kg	195kg
Adjustable Temp. Range	-1°C to +5°C	-1°C to +5°C	-1°C to +5°C	-1°C to +5°C
Max. Ambient Temp.	43°C	43°C	43°C	43°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	4.06 kWh/24h	4.06 kWh/24h	3.54 kWh/24h	3.54 kWh/24h
GEMS Star Rating	8 stars	8 stars	8 stars	8 stars
Refrigeration Capacity	1065W	1065W	1097W	1097W
Rated Current	5A	5A	5A	5A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	2	2	2	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	512mm	512mm	512mm	512mm
Total Depth of Door Open	1303mm	1303mm	1303mm	1303mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	Yes
No. of Shelf Tiers incl. Base	6	6	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	1072(w) x 527(d) mm	1072(w) x 527(d) mm	1072(w) x 527(d) mm	1072(w) x 527(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Silver	Black	Black	Silver
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	UF0374S-NR	UF0374LS-NR	UF0500LF	UF1000LF	UF1500LF
Part Number	3736045-NR	3736046-NR	3736240	3736241	3736242
Ext. Width (mm)*	595	595	635	1260	1880
Ext. Depth (mm)*	640	640	760	760	760
Ext. Height (mm)*	1925	2100	2060	2060	2060
Volume	300L	300L	444L	976L	1507L
Unit Weight	100kg	106kg	113kg	199kg	279kg
Adjustable Temp. Range	-22°C to -18°C	-22°C to -18°C	-22°C to -18°C	-22°C to -18°C	-22°C to -18°C
Max. Ambient Temp.	35°C	35°C	38°C	38°C	38°C
Climate Class	3L1	3L1	3L1	3L1	3L1
Energy Consumption	8.267kWh/24h	8.267kWh/24h	18kWh/24h	21.5kWh/24h	32.9kWh/24h
GEMS Star Rating	4 stars	4 stars	1 star	3 stars	1 star
Refrigeration Capacity	270W	635W	1000W	1600W	2000W
Rated Current	3.26A	3.26A	4.7A	8A	9A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R404a	R404a	R404a
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 15A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, top right	Rear, top right	Rear, top right
Features					
Internal Light	LED	LED	LED	LED	LED
Number of Doors	1	1	1	2	3
Door Type	Glass	Glass	Glass	Glass	Glass
Door Glass Type	Triple Glazed	Triple Glazed	Heated Triple Glazed	Heated Triple Glazed	Heated Triple Glazed
Door Style	Hinged	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	600mm	720mm	720mm	720mm
Total Depth of Door Open	1160mm	1160mm	1300mm	1300mm	1300mm
Self-Closing Door	Yes	Yes	Yes	Yes	Yes
Door Lock	No	No	Yes	Yes	Yes
No. of Shelf Tiers incl. Base	7	7	6	6	6
Shelf Type	Fixed	Fixed	Adjustable	Adjustable	Adjustable
Shelves Dimensions	466(w) x 214(d) mm	466(w) x 214(d) mm	501(w) x 475(d) mm	546(w) x 475(d) mm	10 x 546(w) x 475(d) mm, 5 x 600(w) x 475(d) mm
Temp. Controller	Analogue	Analogue	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	White with silver trim	White with silver trim	White with s/steel trim	White with s/steel trim	White with s/steel trim
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



Model	UC0374SDW-NR	UC0650SD-NR	UC1300SD-NR	UF0374SDS-NR	UF0650SDF-NR	UF1300SDF-NR
Part Number	3735127-NR	3735161-NR	3735200-NR	3735106-NR	3735203-NR	3735194-NR
Ext. Width (mm)*	595	740	1480	595	740	1480
Ext. Depth (mm)*	640	830	830	640	830	830
Ext. Height (mm)*	1925	2010	2010	1925	2010	2010
Volume	372L	650L	1300L	300L	650L	1300L
Unit Weight	88kg	143kg	213kg	97kg	147kg	226kg
Adjustable Temp. Range	+1 to +7°C	+1 to +5°C	+1 to +5°C	-22 to -18°C	-22 to -18°C	-22 to -18°C
Max. Ambient Temp.	40°C	38°C	38°C	35°C	38°C	38°C
Climate Class	4M1	4M1	4M1	4L1	4L1	4L1
Energy Consumption	1.794kWh/24h	2.55kWh/24h	4.18kWh/24h	1.823kWh/24h	8.26kWh/24h	13.617kWh/24h
GEMS Star Rating	4 stars	3 stars	3 stars	7 stars	2 stars	3 stars
Refrigeration Capacity	350W	360W	520W	270W	640W	800W
Rated Current	1.23A	3A	3.4A	2.9A	4.2A	6A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, top left	Rear, top left	Rear, bottom left	Rear, top left	Rear, top left
Features						
Internal Light	Fluorescent	LED	LED	Fluorescent	LED	LED
Number of Doors	1	1	2	1	1	2
Door Type	Solid	Solid	Solid	Solid	Solid	Solid
Door Shape	Flat	Flat	Flat	Flat	Flat	Flat
Door Style	Hinged	Hinged	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	830mm	830mm	600mm	830mm	830mm
Total Depth of Door Open	1160mm	1520mm	1520mm	1160mm	1520mm	1520mm
Self-Closing Door	Yes	Yes	Yes	Yes	Yes	Yes
Door Lock	No	Yes	Yes	No	Yes	Yes
No. of Shelf Tiers incl. Base	7	6	6	7	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Fixed	Adjustable	Adjustable
Shelves Dimensions	499(w) x 360(d) mm	530(w) x 650(d) mm	530(w) x 650(d) mm	466(w) x 214(d) mm	530(w) x 650(d) mm	530(w) x 650(d) mm
Temp. Controller	Analogue	Digital	Digital	Analogue	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes	Yes
Colour	White with black details	Stainless Steel	Stainless Steel	White with black details	Stainless Steel	Stainless Steel
Warranty						
Parts & Labour (Years)	5	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes	Yes

Menu items and prices:

Midella Banana Crepe	16
Strawberry Crème Crepe	16
Shockolale	20
Pancake	20
Double Fortune	20
Croffle Pizza	23
Party Fondue	29





THIS IS A
HAND
WASHING
SINK ONLY

BROMIC



Back Bar Display Fridges

Bromic's Back Bar Fridges have been designed for installation under an industry-standard bench and offers quick and consistent cooling, ensuring your beverages are always ready at the ideal serving temperature.

Back Bar Display Fridges

Our Back Bar Fridges boast a sleek, modern design that complements any bar setting. With adjustable shelving, they can accommodate a diverse range of beverages, making it easy to organise and access them.

Save floor space with seamless under bench installation for a neat and tidy bar area

Adjustable shelves to fit bottles of all shapes and sizes for maximum storage

Narrow wired shelf design to keep bottles securely in place

Digital controller ensures your drinks are always at the perfect temperature for serving



Double-glazing prevents condensation and keeps your drinks clearly visible

Bright LED lighting enhances the visibility of the drinks and attract customers' attention


Durable construction to withstand the demands of a busy commercial environment

Natural refrigerant to keep your energy bills low and lower your carbon footprint






Full length door handle:

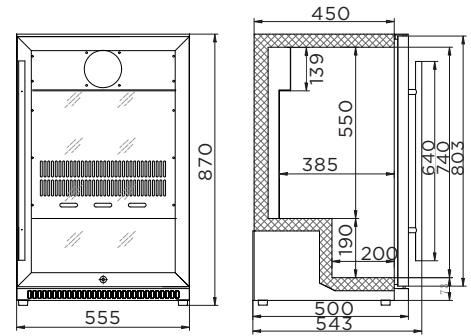**Back Bar Display Fridge (Hinged)****BB0120GD-NR-1**


Part No.	Volume	Weight
3736070-1	118L	58kg
External (mm)	Internal (mm)	Packaged (mm)
Width 555	470	605
Depth 543	385	564
Height 870	740	895

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

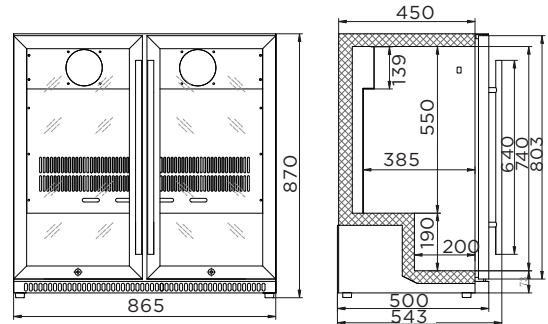5 YEAR EXTRA CARE WARRANTYHANDLE TOP
TO BOTTOM**Back Bar Display Fridge 2 Doors (Hinged)****BB0200GD-NR-1**

Part No.	Volume	Weight
3736071-1	190L	72kg
External (mm)	Internal (mm)	Packaged (mm)
Width 865	781	915
Depth 543	385	564
Height 870	740	895


- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 4 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

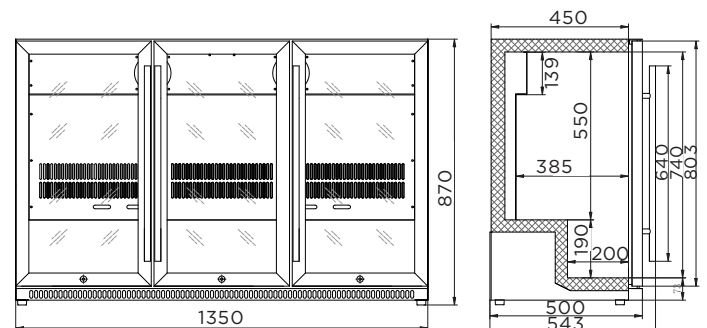5 YEAR EXTRA CARE WARRANTYHANDLE TOP
TO BOTTOM**Back Bar Display Fridge 3 Doors (Hinged)****BB0330GD-NR-1**

Part No.	Volume	Weight
3736073-1	307L	90kg
External (mm)	Internal (mm)	Packaged (mm)
Width 1350	1265	1395
Depth 543	385	564
Height 870	740	895

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTYHANDLE TOP
TO BOTTOM

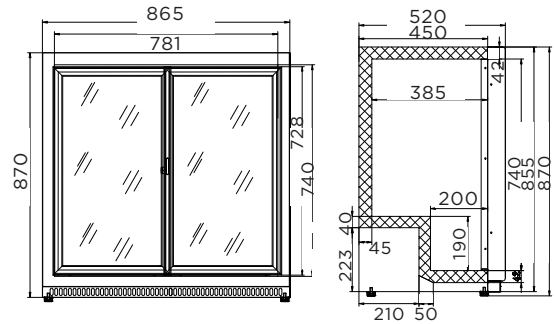


Back Bar Display Fridge 2 doors (Sliding)

BB0200GDS-NR-1

Part No.	Volume	Weight
3736072-1	190L	72kg
	External (mm)	Internal (mm)
Width	865	781
Depth	520	385
Height	870	740
	Packaged (mm)	
	915	564
	895	

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 4 stars GEMS rating
- 3M1 climate class
- High-impact LED lighting for perfect product presentation

5 YEAR EXTRA CARE WARRANTY

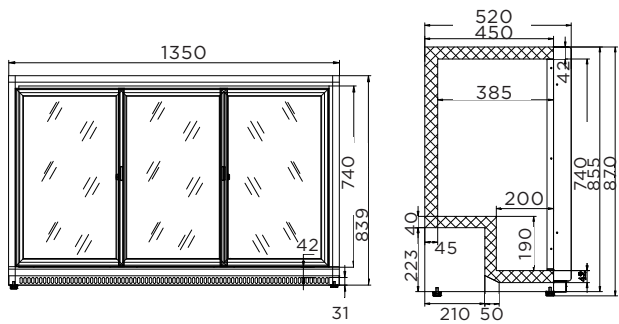

Back Bar Display Fridge 3 Doors (Sliding)

BB0330GDS-NR-1

Part No.	Volume	Weight
3736074-1	307L	90kg
	External (mm)	Internal (mm)
Width	1350	1265
Depth	520	385
Height	870	740
	Packaged (mm)	
	1395	564
	895	

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 3M1 climate class
- High-impact LED lighting for perfect product presentation

5 YEAR EXTRA CARE WARRANTY





Model	BB0120GD-NR-1	BB0200GD-NR-1	BB0330GD-NR-1	BB0200GDS-NR-1	BB0330GDS-NR-1
Part Number	3736070-1	3736071-1	3736073-1	3736072-1	3736074-1
External Width (mm)*	555	865	1350	865	1350
External Depth (mm)*	543	543	543	520	520
External Height (mm)*	870	870	870	870	870
Volume	118L	190L	307L	190L	307L
Unit Weight	58kg	72kg	90kg	72kg	90kg
Adjustable Temp. Range	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C
Max. Ambient Temp.	38°C	38°C	38°C	38°C	38°C
Climate Class	3M1	3M1	3M1	3M1	3M1
Energy Consumption	1.44kWh/24h	2.6kWh/24h	3.58kWh/24h	2.6kWh/24h	3.58kWh/24h
GEMS Star Rating	6 stars	4 stars	3 stars	4 stars	3 stars
Refrigeration Capacity	182W	213W	408W	213W	408W
Rated Current	0.95A	1.2A	2.1A	1.2A	2.1A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600	R600	R600	R600	R600
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom	Rear, bottom	Rear, bottom	Rear, bottom	Rear, bottom
Features					
Internal Light	LED	LED	LED	LED	LED
Number of Doors	1	2	3	2	3
Door Type	Glass	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Sliding	Sliding
Door Swing Dimension	553mm	424mm	444mm	-	-
Total Depth of Door Open	1022mm	894mm	933mm	-	-
Self-Closing Door	Yes	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	Yes	Yes
Number of Shelf Tiers incl. Base	3	3	3	3	3
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	456(w) x 360(d) mm	370(w) x 326(d) mm	370(w) x 326(d) mm	370(w) x 326(d) mm	370(w) x 326(d) mm
Temp. Controller	Digital	Digital	Digital	Digital	Digital
Feet / Castors	No, adjustable feet	No, adjustable feet	No, adjustable feet	No, adjustable feet	No, adjustable feet
Colour	Black	Black	Black	Black	Black
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes





Under Bench Fridges & Freezers

Bromic's Under Bench Fridges and Freezers have been specifically developed to withstand heavy use in the hospitality industry. They slot seamlessly underneath an industry-standard bench and are available in one- to four-door configurations.

Under Bench Glass Door Fridges

Our Under Bench Glass Door Fridges are ideal for storing a range of perishable food and drinks, including dairy. Equipped with clear glass doors for easy stock management and LED lighting for enhanced visibility, these fridges are perfectly suited for cafes, bars, and restaurants.

The food-grade stainless steel bench top provides a hygienic surface and doubles as an additional workspace

Keep your bar area neat and tidy with our seamless under bench installation, saving valuable floor space

Additional shelf extenders and narrow wired shelf design ensure items stay securely in place

With adjustable shelves and a base per door, you can easily fit items of various sizes, maximising your storage

The digital controller ensures that your drinks are always kept at the ideal temperature for serving



Move and position the fridge effortlessly with the castors, allowing you to adapt the setup according to your needs


The double-glazed safety glass door prevents condensation, providing a clear view of your drinks at all times

Our fridge uses a natural refrigerant, which not only helps you save on energy bills but also reduces your carbon footprint

Easily find what you're looking for with the bright LED lighting that illuminates the fridge, ensuring excellent visibility

Designed for the demands of a busy commercial environment, our fridge features a durable stainless steel construction that can withstand heavy use



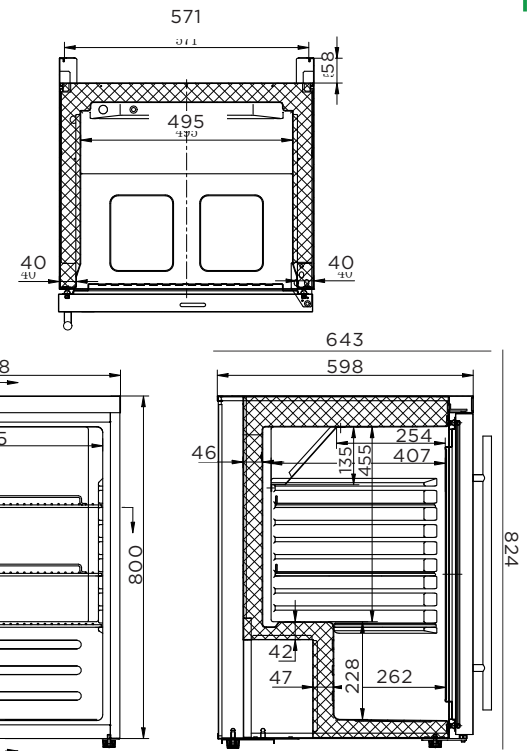

Under Bench Glass Door Fridge (Hinged)


UBC0140GD-NR

Part No.	Volume	Weight
3736255	138L	45kg

- Temperature range: +1°C to +10°C
- Max ambient temp: 32°C
- 6 stars GEMS rating
- 3M1 climate class
- 4 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	598	490	650
Depth	643	400	650
Height	824	680	885

5 YEAR EXTRA CARE WARRANTY

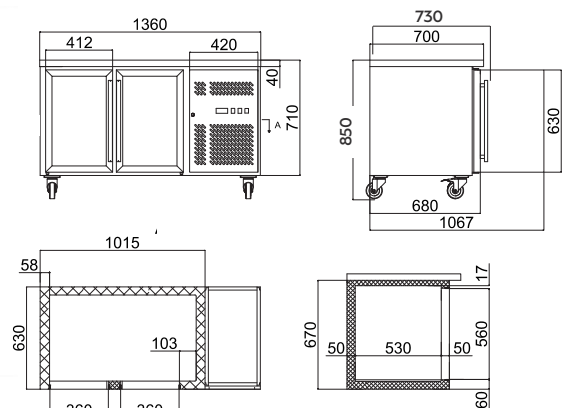FULL STAINLESS
STEEL EXTERIOR

Under Bench Glass Door Fridge 2 Doors (Hinged)

UBC1360GD-NR


Part No.	Volume	Weight
3735213-NR	282L	122kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 32°C
- 3 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	1360	902	1390
Depth	730	530	730
Height	850	589	910

5 YEAR EXTRA CARE WARRANTY

FULL STAINLESS
STEEL EXTERIOR

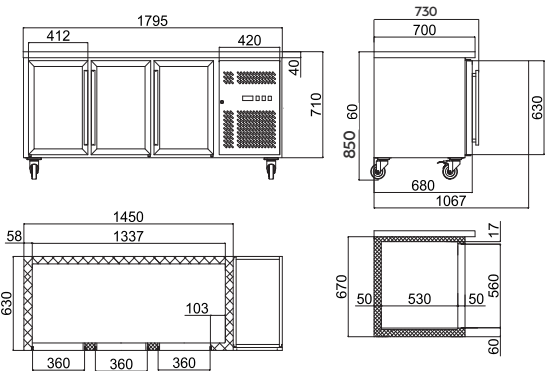

Under Bench Glass Door Fridge 3 Doors (Hinged) **UBC1795GD-NR**


Part No.	Volume	Weight
3735211-NR	417L	151kg
	External (mm)	Internal (mm)
Width	1795	1337
Depth	730	530
Height	850	589
	Packaged (mm)	
	1825	730
	910	

- Temperature range: +1°C to +5°C
- Max ambient temp: 32°C
- 2 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR

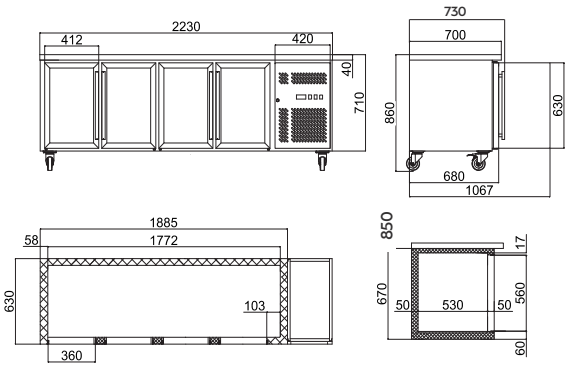

Under Bench Glass Door Fridge 4 Doors (Hinged) **UBC2230GD-NR**

Part No.	Volume	Weight
3735212-NR	553L	180kg
	External (mm)	Internal (mm)
Width	2230	1772
Depth	730	530
Height	850	589
	Packaged (mm)	
	2260	740
	910	

- Temperature range: +1°C to +5°C
- Max ambient temp: 32°C
- 2 stars GEMS rating
- 3M1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR



Under Bench Storage Fridges

Built with sturdy stainless steel to withstand daily wear and tear, our Under Bench Fridges feature a spacious interior and adjustable shelves, making them a practical choice for any busy café, restaurant, or bar.

The food-grade stainless steel bench top provides a hygienic surface and doubles as an additional workspace

Keep your bar area neat and tidy with our seamless under bench installation, saving valuable floor space

Our fridge uses a natural refrigerant, which not only helps you save on energy bills but also reduces your carbon footprint

Stainless steel self-closing doors minimise temperature loss, ensuring your items stay perfectly chilled without wasting energy



Move and position the fridge effortlessly with the castors, allowing you to adapt the setup according to your needs

With adjustable shelves and a base per door, you can easily fit items of all shapes and sizes, maximising your storage


Easily adjust and monitor the temperature to ensure your items are kept at the perfect temperature

Narrow wired shelf design and shelf extenders ensure items stay securely in place

The internal LED lighting illuminates the interior of the fridge, making it easy to locate and identify specific products, even in low-light conditions

Designed for the demands of a busy commercial environment, our fridge features a durable stainless steel construction that can withstand heavy use



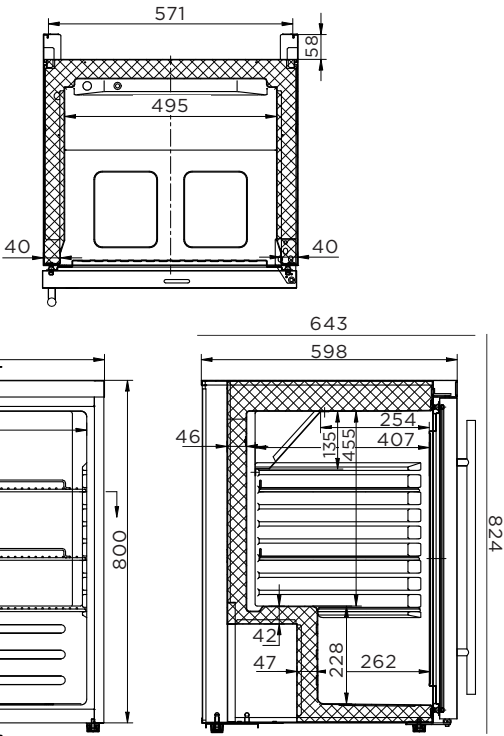

FULL STAINLESS
STEEL EXTERIOR

Under Bench Storage Fridge


UBC0140SD-NR

Part No.	Volume	Weight
3736254	138L	36kg

- Temperature range: +1°C to +10°C
- Max ambient temp: 32°C
- 8 stars GEMS rating
- 3M1 climate class
- 4 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	598	490	650
Depth	643	400	650
Height	824	680	885

5 YEAR EXTRA CARE WARRANTY

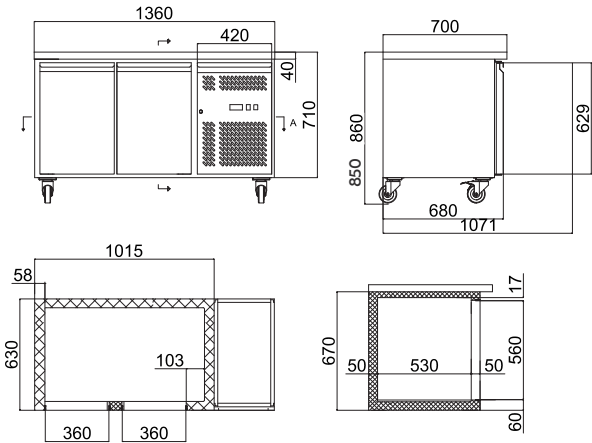

FULL STAINLESS
STEEL EXTERIOR

Under Bench Storage Fridge 2 Doors


UBC1360SD-NR

Part No.	Volume	Weight
3735204-NR	282L	110kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 4 stars GEMS rating
- 4M1 climate class
- 3 shelf tiers including base for optimal product display

	External (mm)	Internal (mm)	Packaged (mm)
Width	1360	902	1390
Depth	700	530	730
Height	850	589	910

5 YEAR EXTRA CARE WARRANTY

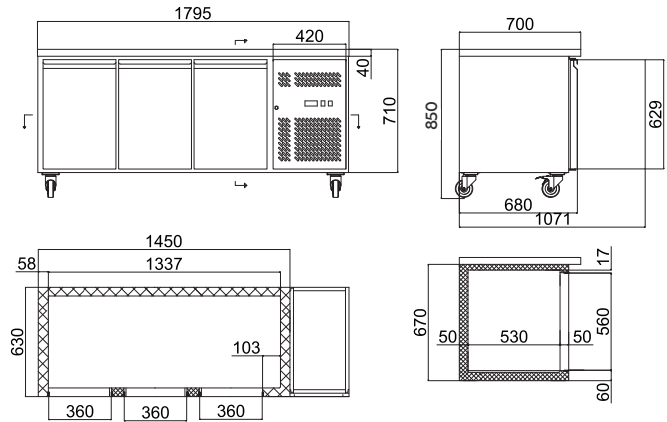

Under Bench Storage Fridge 3 Doors

UBC1795SD-NR

Part No.	Volume	Weight	
3735206-NR	417L	142kg	


	External (mm)	Internal (mm)	Packages (mm)
Width	1795	1337	1825
Depth	700	530	730
Height	850	589	910

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 4 stars GEMS rating
- 4M1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR

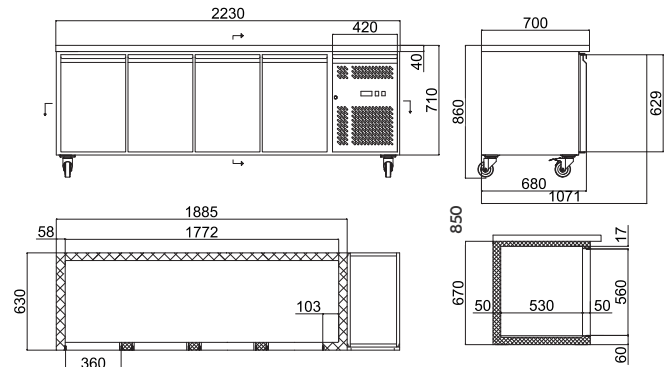

Under Bench Storage Fridge 4 Doors

UBC2230SD-NR

Part No.	Volume	Weight	
3735209-NR	553L	173kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	2230	1772	2260
Depth	700	530	740
Height	850	589	910

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 4 stars GEMS rating
- 4M1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR



Under Bench Storage Freezers

Our Under Bench Freezers are designed to fit neatly under existing benches, ensuring that frozen ingredients are always within reach and reliably maintained at a stable temperature, which is vital for food safety.

The food-grade stainless steel bench top provides a hygienic surface and doubles as an additional workspace

Keep your bar area neat and tidy with our seamless under bench installation, saving valuable floor space

Our fridge uses a natural refrigerant, which not only helps you save on energy bills but also reduces your carbon footprint

Stainless steel self-closing doors minimise temperature loss, ensuring your items stay perfectly frozen without wasting energy



Move and position the fridge effortlessly with the castors, allowing you to adapt the setup according to your needs


With adjustable shelves and a base, you can easily fit items of all shapes and sizes, maximising your storage

Narrow wired shelf design and shelf extenders ensure items stay securely in place

Easily adjust and monitor the temperature to ensure that frozen products are always within reach and are kept reliably at the right temperature, vital for maintaining food safety

Designed for the demands of a busy commercial environment, our freezer features a durable stainless steel construction that can withstand heavy use



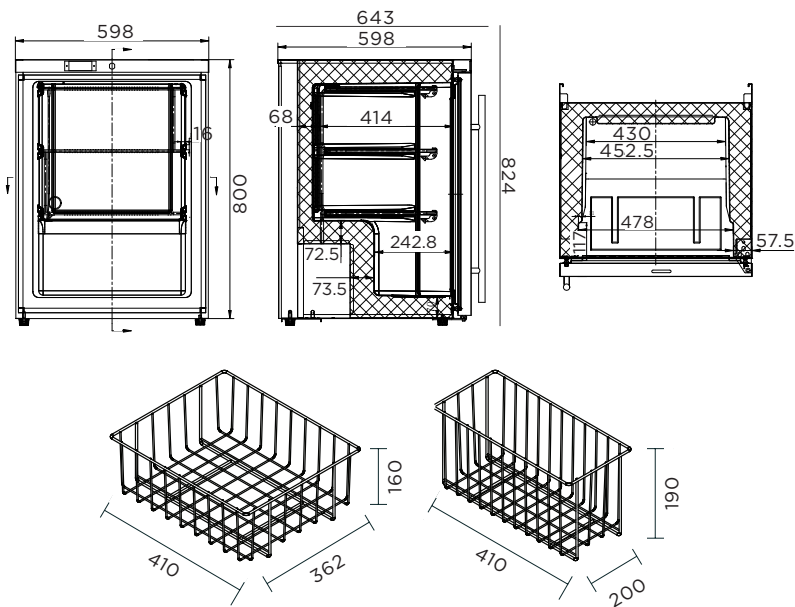

FULL STAINLESS
STEEL EXTERIOR

Under Bench Storage Freezer


UBF0140SD-NR

Part No.	Volume	Weight
3736256	115L	38kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	598	490	650
Depth	643	400	650
Height	824	680	885

- Temperature range: -24°C to -16°C
- Max ambient temp: 32°C
- 7 stars GEMS rating
- 3L1 climate class
- 3 baskets included for optimal product display

5 YEAR EXTRA CARE WARRANTY

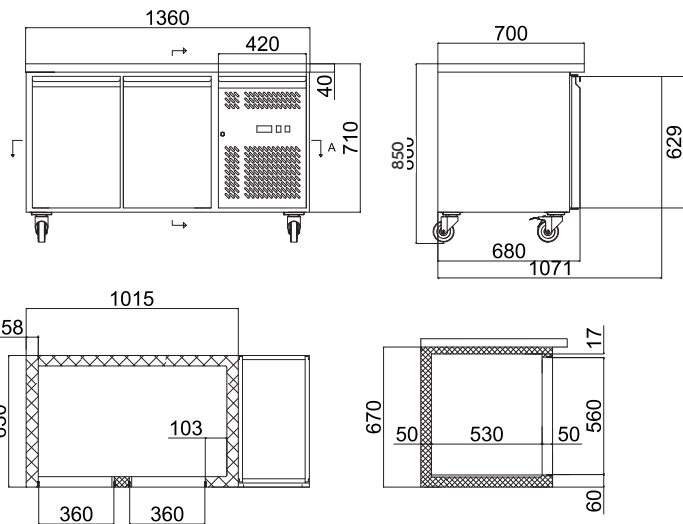

FULL STAINLESS
STEEL EXTERIOR

Under Bench Storage Freezer 2 Doors


UBF1360SD-NR

Part No.	Volume	Weight
3736230-NR	282L	109kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1360	902	1390
Depth	700	530	730
Height	850	589	910

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 2 stars GEMS rating
- 4L1 climate class
- 3 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY

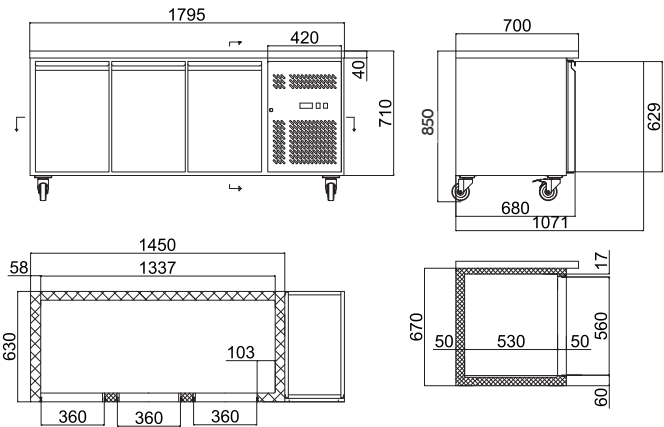

Under Bench Storage Freezer 3 Doors


UBF1795SD-NR

Part No.	Volume	Weight	• Temperature range: -22°C to -18°C • Max ambient temp: 38°C • 2 stars GEMS rating • 4L1 climate class • 3 shelf tiers including base for optimal product display
3736231-NR	417L	140kg	
External (mm)	Internal (mm)	Packaged (mm)	
Width	1795	1337	
Depth	700	530	
Height	850	589	

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR

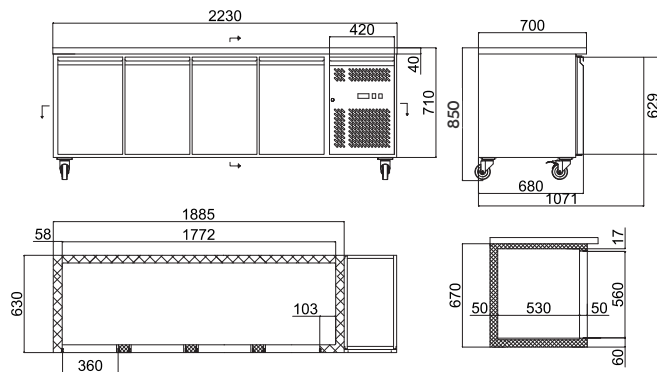

Under Bench Storage Freezer 4 Doors

UBF2230SD-NR

Part No.	Volume	Weight	• Temperature range: -22°C to -18°C • Max ambient temp: 38°C • 2 stars GEMS rating • 4L1 climate class • 3 shelf tiers including base for optimal product display
3736232-NR	553L	155kg	
External (mm)	Internal (mm)	Packaged (mm)	
Width	2230	1772	
Depth	700	530	
Height	850	589	

5 YEAR EXTRA CARE WARRANTY



FULL STAINLESS STEEL EXTERIOR





Model	UBC0140GD-NR	UBC1360GD-NR	UBC1795GD-NR	UBC2230GD-NR
Part Number	3736255	3735213-NR	3735211-NR	3735212-NR
External Width (mm)*	598	1360	1795	2230
External Depth (mm)*	643	730	730	730
External Height (mm)*	824	850	850	850
Volume	138L	282L	417L	553L
Unit Weight	45kg	122kg	151kg	180kg
Adjustable Temp. Range	+1 to +10°C	+1 to +5°C	+1 to +5°C	+1 to +5°C
Max. Ambient Temp.	32°C	32°C	32°C	32°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	1.396kWh/24h	3.64kWh/24h	4.75kWh/24h	6.08kWh/24h
GEMS Star Rating	6 stars	3 stars	2 stars	2 stars
Refrigeration Capacity	100W	245W	245W	345W
Rated Current	1.2A	3.64A	4.75A	6.08A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R600a	R600a	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	1	2	3	4
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	594mm	371mm	371mm	371mm
Total Depth of Door Open	1153mm	1071mm	1071mm	1071mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	No	No	No
Number of Shelf Tiers incl. Base	4	3	3	3
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	510(w) x 360(d) mm	330(w) x 530(d) mm	333(w) x 530(d) mm	333(w) x 530(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	No, Feet + Rollers	Yes	Yes	Yes
Colour	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	UBC0140SD-NR	UBC1360SD-NR	UBC1795SD-NR	UBC2230SD-NR
Part Number	3736254	3735204-NR	3735206-NR	3735209-NR
External Width (mm)*	598	1360	1795	2230
External Depth (mm)*	643	700	700	700
External Height (mm)*	824	850	850	850
Volume	138L	282L	417L	553L
Unit Weight	36kg	110kg	142kg	173kg
Adjustable Temp. Range	+1 to +10°C	+1 to +5°C	+1 to +5°C	+1 to +5°C
Max. Ambient Temp.	32°C	38°C	38°C	38°C
Climate Class	3M1	4M1	4M1	4M1
Energy Consumption	0.98kWh/24h	3.024kWh/24h	3.341kWh/24h	3.768kWh/24h
GEMS Star Rating	8 stars	4 stars	4 stars	4 stars
Refrigeration Capacity	100W	245W	245W	345W
Rated Current	1.2A	2A	2A	2.7A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R600a	R600a	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom	Rear, Bottom Right	Rear, Bottom Right	Rear, Bottom Right
Features				
Internal Light	No	No	No	No
Number of Doors	1	2	3	4
Door Type	Solid	Solid	Solid	Solid
Door Glass Type	-	-	-	-
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	594mm	371mm	371mm	371mm
Total Depth of Door Open	1156mm	1071mm	1071mm	1071mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	No	No	No
Number of Shelf Tiers incl. Base	4	3	3	3
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	510(w) x 360(d) mm	333(w) x 530(d) mm	333(w) x 530(d) mm	333(w) x 530(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	No, Feet + Rollers	Yes	Yes	Yes
Colour	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	UBF0140SD-NR	UBF1360SD-NR	UBF1795SD-NR	UBF2230SD-NR
Part Number	3736256	3736230-NR	3736231-NR	3736232-NR
External Width (mm)*	598	1360	1795	2230
External Depth (mm)*	643	700	700	700
External Height (mm)*	824	850	850	850
Volume	115L	282L	417L	553L
Unit Weight	38kg	109kg	140kg	155kg
Adjustable Temp. Range	-24 to -16°C	-22 to -18°C	-22 to -18°C	-22 to -18°C
Max. Ambient Temp.	32°C	38°C	38°C	38°C
Climate Class	3L1	4L1	4L1	4L1
Energy Consumption	1.65kWh/24h	8.01kWh/24h	9.11kWh/24h	11kWh/24h
GEMS Star Rating	7 stars	2 stars	2 stars	2 stars
Refrigeration Capacity	100W	774W	774W	774W
Rated Current	1.2A	4.5A	4.5A	4.5A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom	Rear, Bottom Right	Rear, Bottom Right	Rear, Bottom Right
Features				
Internal Light	No	No	No	No
Number of Doors	1	2	3	4
Door Type	Solid	Solid	Solid	Solid
Door Glass Type	-	-	-	-
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	594mm	371mm	371mm	371mm
Total Depth of Door Open	1156mm	1071mm	1071mm	1071mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	No	No	No
Number of Shelf Tiers incl. Base	3	3	3	3
Shelf Type	-	Adjustable	Adjustable	Adjustable
Shelves Dimensions	2 x 410(w) x 362 (d) x 160(h) mm, 1 x 410(w) x 200(d) x 190 (h) mm	330(w) x 530(d) mm	333(w) x 530(d) mm	333(w) x 530(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	No, Feet + Rollers	Yes	Yes	Yes
Colour	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes







Pizza Prep Fridges

Bromic's Pizza Prep Fridges are engineered to boost efficiency in high-volume kitchens, providing a practical space for food preparation with quick access to fresh ingredients. Equipped with dual airflow technology to ensure compliance with food safety standards, these counters are ideal for sandwiches, salads, or pizza preparation.

Pizza Prep Fridges + Accessories

With easy access to fresh ingredients, a wide prep bench, removable chopping board, and spacious storage our Pizza Prep Fridges are designed to streamline workflow and save time, making them a versatile choice for quick-service restaurants.

Dual airflow technology ensures that your ingredients remain fresh for longer

Prepare your food with ease using the 480mm removable cutting board

Keep your ingredients fresh even in hot kitchens with maximum ambient temperature of 43°C

Hinged removable insulated lids that can lock in an open position

Hygienic and easy-to-clean design featuring curved corners

No more mess in your cabinets with the enclosed well under pans

Easily store larger trays with 2 extra-wide, self-closing doors

The digital temperature controller and display allow you to easily set and maintain the ideal temperature


Customise your storage space with 2 adjustable shelves per door and 9 removable Gastronorm 1/3 pans & rails

Move and place your pizza prep wherever you need it with front lockable castors

Solid stainless steel exterior provides temperature stability

Semi-automatic defrost functionality helps simplify maintenance and ensures efficient operation of the freezer



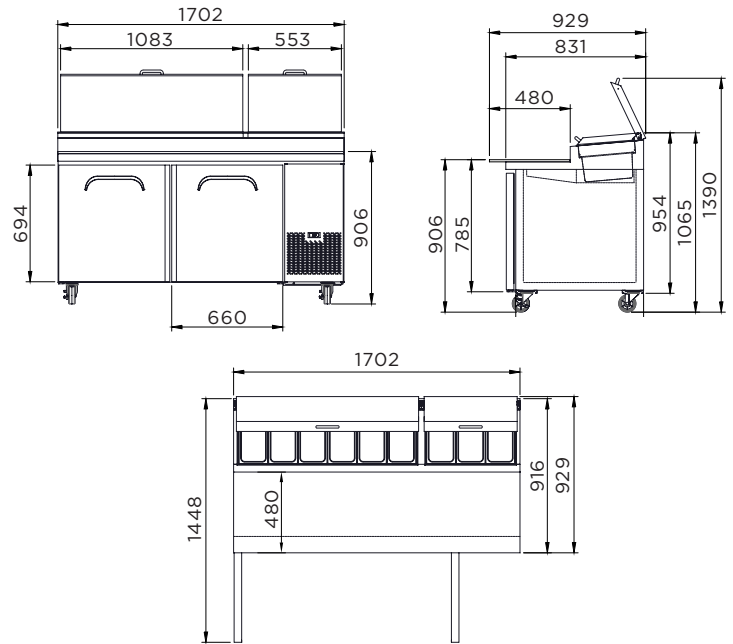


Pizza Prep Fridge (2 Doors)

PP1700

Part No.	Volume	Weight
3735801	572L	165kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1702	1260	1752
Depth	929	670	979
Height	1065	590	1115

- Temperature range: 0°C to +5°C
- Max. ambient temp: 43°C
- 5M1 climate class
- 9 removable Gastronorm 1/3" pans & rails
- 2 extra-wide, self-closing doors
- 3 adjustable shelves per door plus base
- Dual Airflow technology (blown air well)
- Removable cutting board (480mm)

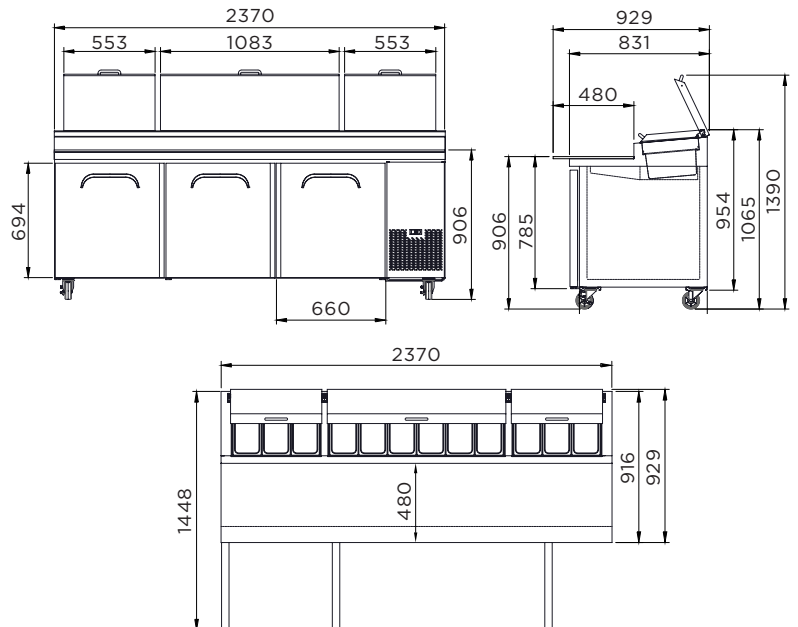5 YEAR EXTRA CARE WARRANTY


Pizza Prep Fridge (3 Doors)


PP2370

Part No.	Volume	Weight
3735802	873L	207kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	2370	1930	2420
Depth	929	670	979
Height	1065	590	1115

- Temperature range: 0°C to +5°C
- Max. ambient temp: 43°C
- 5M1 climate class
- 12 removable Gastronorm 1/3" pans & rails
- 3 extra-wide, self-closing doors
- 3 adjustable shelves per door plus base
- Dual Airflow technology (blown air well)
- Removable cutting board (480mm)

5 YEAR EXTRA CARE WARRANTY

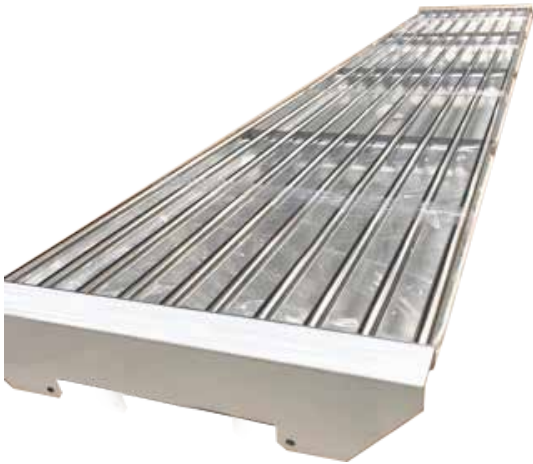Conversion Kit for PP1700

TUBE GRILL KIT - PP1700

Part No.	3735827
	External (mm)
Width	1704
Depth	440
Height	22 / 80 incl. bracket and tube grill

- Simplify your cleaning process with the raised grill and removable catching trays
- Compatible with Bronic PP1700 Pizza Prep Fridge
- Available as an optional accessory
- Purchased separately



Conversion Kit for PP2370

TUBE GRILL KIT - PP2370

Part No.	3735828
	External (mm)
Width	2372
Depth	440
Height	30 / 80 incl. bracket and tube grill

- Simplify your cleaning process with the raised grill and removable catching trays
- Compatible with Bronic PP2370 Pizza Prep Fridge
- Available as an optional accessory
- Purchased separately



Model	PP1700	PP2370
Part Number	3735801	3735802
Ext. Width (mm)*	1702	2370
Ext. Depth (mm)*	929	929
Ext. Height (mm)*	1065	1065
Volume	572L	873L
Unit Weight	165kg	207kg
Adjustable Temp. Range	0°C to +5°C	0°C to +5°C
Max. Ambient Temp.	43°C	43°C
Climate Class	5M1	5M1
Energy Consumption	3.890 kWh/24h	5.349 kWh/24h
Refrigeration Capacity	308W	670W
Current	3.4A	4A
Electrical Voltage	220-240V	220-240V
Refrigerant	R134a	R404a
Frequency	50Hz	50Hz
Power Supply	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right
Features		
Internal Light	No	No
Number of Doors	2	3
Door Type	Solid	Solid
Door Shape	Flat	Flat
Door Swing Dimension	532mm	532mm
Total Depth of Door Open	1448mm	1448mm
Door Style	Hinged	Hinged
Door Lock	No	No
Self-Closing Door	Yes	Yes
Shelf Dimension	600(w) x 643(d) mm	2 x 605(w) x 643(d) mm; 4 x 660(w) x 643(d) mm
No. of Tubs / Pans	9	12
Tub / Pan Dimensions	176(w) x 324(d) mm (GN 1/3")	176(w) x 324(d) mm (GN 1/3")
Number of Lids	3	2
Temp. Controller	Digital	Digital
Wheels	Yes	Yes
Warranty		
Parts & Labour (Years)	5	5
Bromic Extra Care	Yes	Yes





Chest Freezers

Bromic's Chest Freezers offer a reliable and cost-effective commercial freezing solution. Select from solid lid stainless steel chest freezers for back-of-house storage or glass lid options ideally suited for display and self-service use.

Display Chest Freezers

Our Display Chest Freezers are designed to make your products stand out, attracting customers and encouraging them to purchase. Choose from flat or angled glass tops, available in a wide range of volumes, all designed to effectively boost your sales.

The integrated lock and key system ensure that your merchandise remains secure, giving you peace of mind while the freezer is unattended

Built with corrosion-resistant construction, this display chest freezer is designed to last in demanding commercial environments

The heat-resistant tempered glass lid not only provides a clear view of the contents but also ensures safety during operation by staying cool to the touch

Fully populated with PVC-coated display baskets are included, helping you keep your items neatly arranged and easily accessible for customers to browse

Smooth curved sliding glass lids in an aluminum top frame open left and right and allow you to easily reach and see your merchandise



Equipped with castors, this freezer can be effortlessly moved and placed wherever you need it, making it convenient for rearranging your store layout or cleaning the area

Our freezer uses natural refrigerant, which not only helps you save on energy bills but also reduces your carbon footprint


The digital temperature display allows for quick and easy monitoring of the freezer's temperature

Can be decalced for maximum brand exposure, showcasing your logo and promotional messages - POA

The quick-drain plug simplifies the defrosting and cleaning process, saving you time and effort

High load limit maximises storage, allowing you to store a large quantity of merchandise efficiently



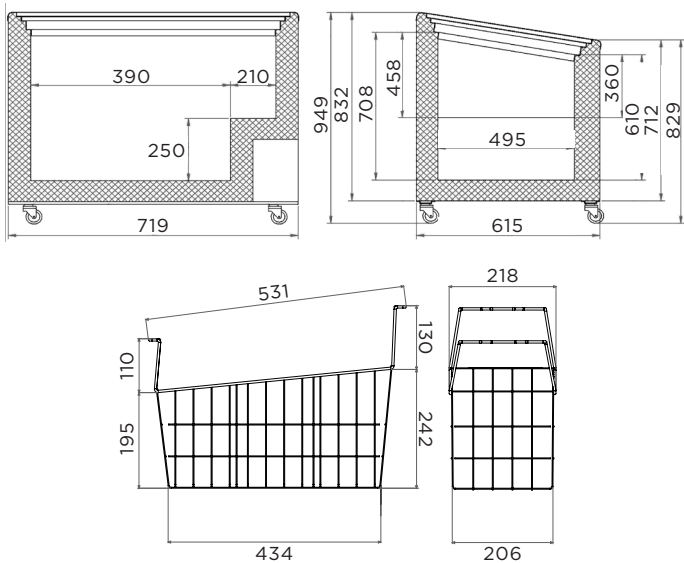

Display Chest Freezer (Curved Glass Top)


CF0200ATCG-NR

Part No.	Volume	Weight	
3735301-NR	176L	57kg	

	External (mm)	Internal (mm)	Package (mm)
Width	719	600	740
Depth	615	495	680
Height	949	708	980

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 8 stars GEMS rating
- 4L1 climate class
- 2 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

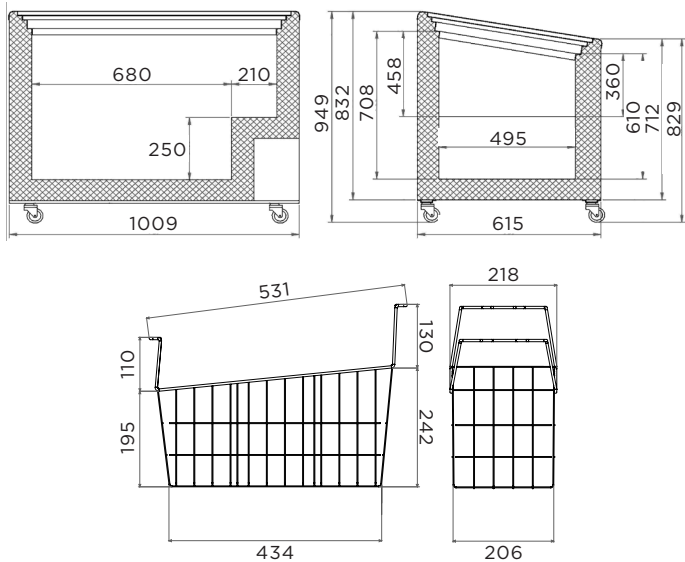

Display Chest Freezer (Curved Glass Top)


CF0300ATCG-NR

Part No.	Volume	Weight	
3735302-NR	264L	70kg	

	External (mm)	Internal (mm)	Package (mm)
Width	1010	890	1040
Depth	615	495	680
Height	949	708	980

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 4 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

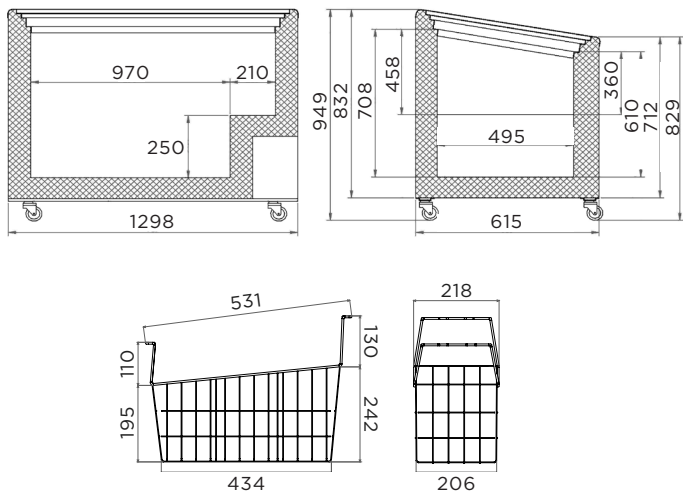


Display Chest Freezer (Curved Glass Top)

CF0400ATCG-NR

	Part No.	Volume	Weight
	3735303-NR	352L	81kg
	External (mm)	Internal (mm)	Packaged (mm)
Width	1298	1180	1330
Depth	615	495	680
Height	949	708	980

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 5 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

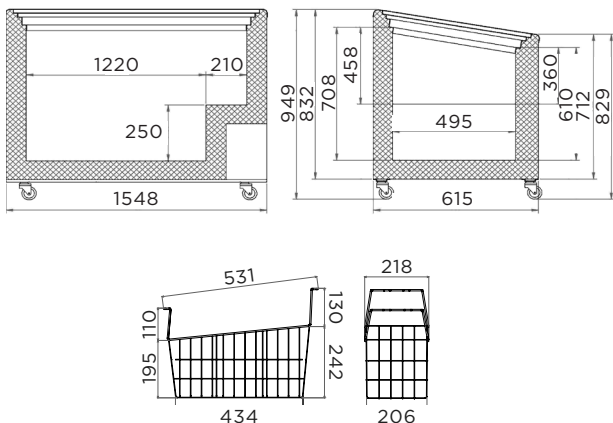

SPECIAL ORDER


Display Chest Freezer (Curved Glass Top)

CF0500ATCG-NR

	Part No.	Volume	Weight
	3736203-NR	427L	96kg
	External (mm)	Internal (mm)	Packaged (mm)
Width	1548	1430	1585
Depth	615	495	680
Height	949	708	980

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 6 stars GEMS rating
- 4L1 climate class
- 6 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

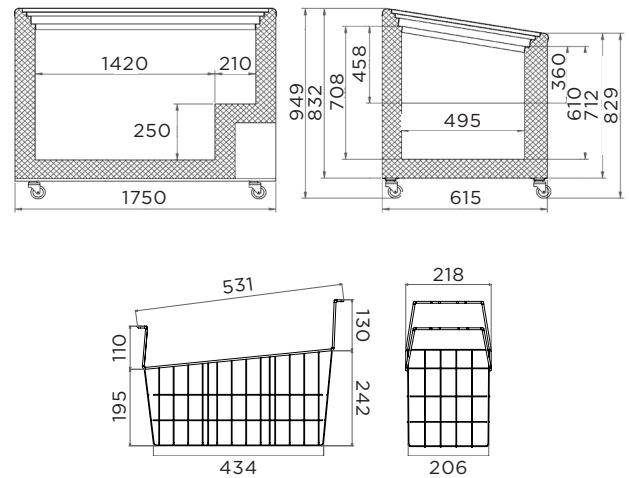

SPECIAL ORDER

Display Chest Freezer (Curved Glass Top)


CF0600ATCG-NR

Part No.	Volume	Weight
3736204-NR	555L	114kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1750	1630	1790
Depth	615	495	680
Height	949	708	980

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 6 stars GEMS rating
- 4L1 climate class
- 6 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

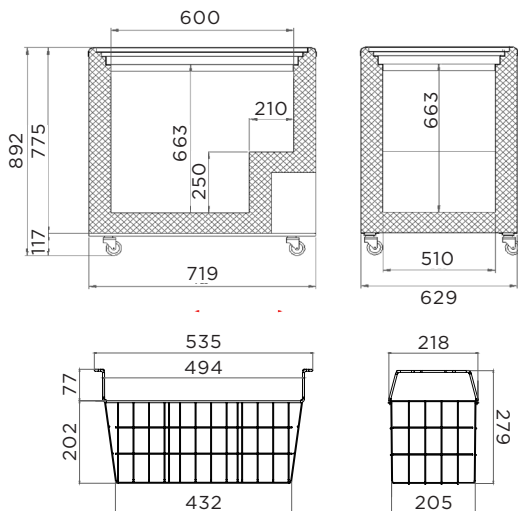

Display Chest Freezer (Flat Glass Top)

CF0200FTFG-NR


Part No.	Volume	Weight
3735308-NR	191L	58kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	719	600	740
Depth	629	510	680
Height	892	663	950

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 8 stars GEMS rating
- 4L1 climate class
- 2 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY



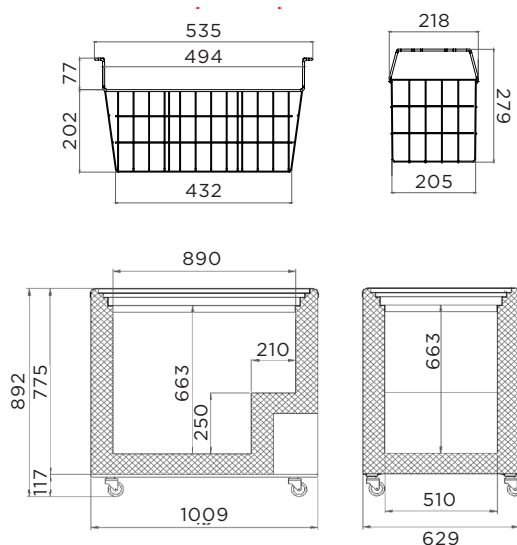

Display Chest Freezer (Flat Glass Top)


CF0300FTFG-NR

Part No.	Volume	Weight
3735309-NR	296L	70kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1010	890	1040
Depth	629	510	680
Height	892	663	950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 4 baskets included
- Integrated lock system

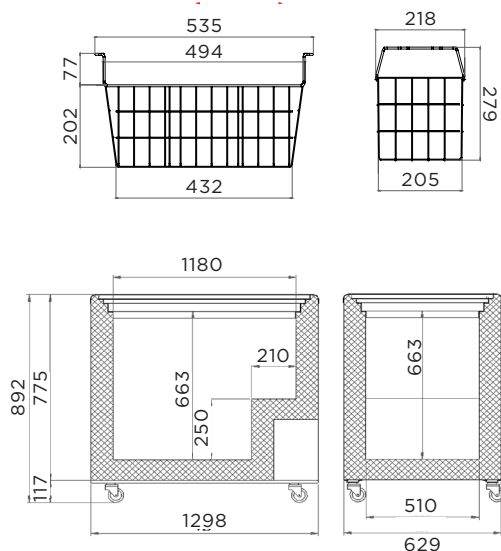

Display Chest Freezer (Flat Glass Top)


CF0400FTFG-NR

Part No.	Volume	Weight
3735310-NR	401L	80kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1298	1180	1330
Depth	629	510	680
Height	892	663	950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 5 baskets included
- Integrated lock system

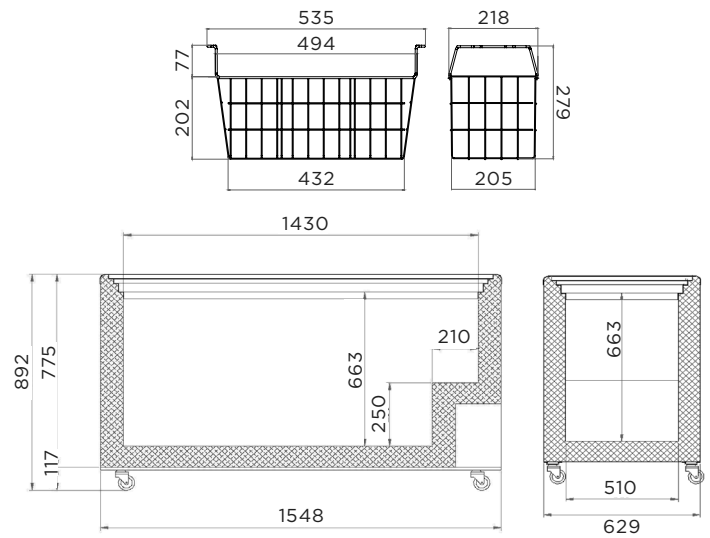

Display Chest Freezer (Flat Glass Top)


CF0500FTFG-NR

Part No.	Volume	Weight
3735304-NR	491L	101kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1548	1430	1585
Depth	629	510	680
Height	892	663	950

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 6 stars GEMS rating
- 4L1 climate class
- 6 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

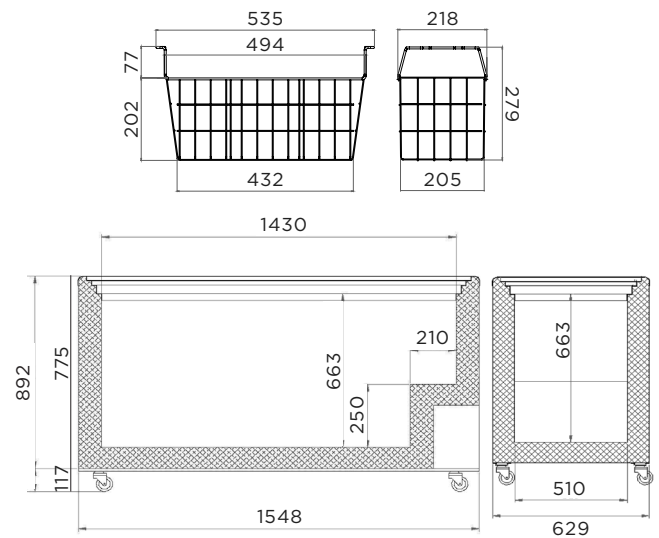

Display Chest Freezer (Flat Glass Top)

CF0700FTFG-NR

Part No.	Volume	Weight
3735305-NR	670L	120kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	2055	1930	2095
Depth	629	510	680
Height	892	663	950

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 8 baskets included
- Integrated lock system


5 YEAR EXTRA CARE WARRANTY



Stainless Steel Chest Freezers



Our Solid Lid Chest Freezers feature energy-efficient performance, high-quality, food-grade stainless steel construction, and spacious storage, making them an ideal deep-freeze solution for commercial kitchens.

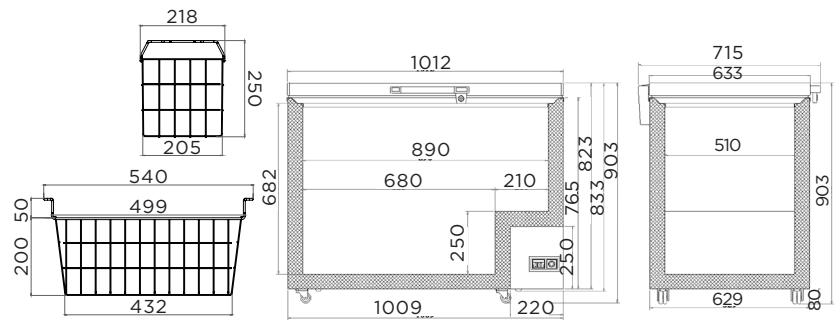

**Storage Chest Freezer (Stainless Steel Top)****CF0300FTSS-NR**

Part No.	Volume	Weight	
3735312-NR	296L	65kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	1012	890	1100
Depth	715	510	750
Height	903	682	1005


- Temperature range: -25°C to -15°C
- Max ambient temp: 35°C
- 8 stars GEMS rating
- 4L1 climate class
- 1 basket included
- Integrated lock system

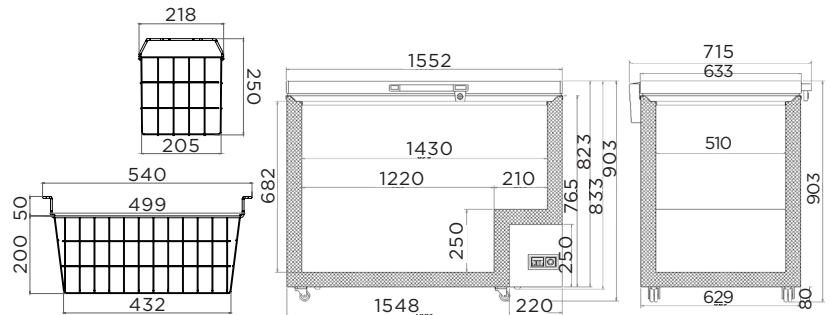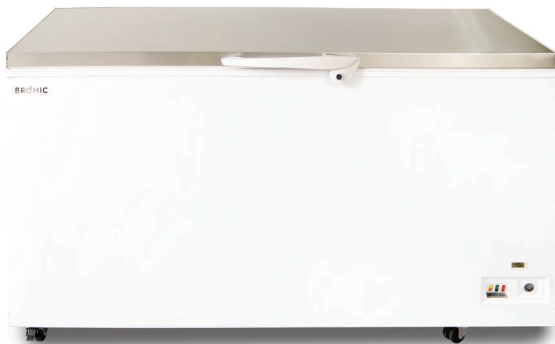5 YEAR EXTRA CARE WARRANTY**Storage Chest Freezer (Stainless Steel Top)****CF0500FTSS-NR**

Part No.	Volume	Weight	
3735307-NR	492L	94kg	

	External (mm)	Internal (mm)	Packaged (mm)
Width	1552	1430	1640
Depth	715	510	750
Height	903	682	1005

- Temperature range: -25°C to -15°C
- Max ambient temp: 35°C
- 9 stars GEMS rating
- 4L1 climate class
- 2 baskets included
- Integrated lock system

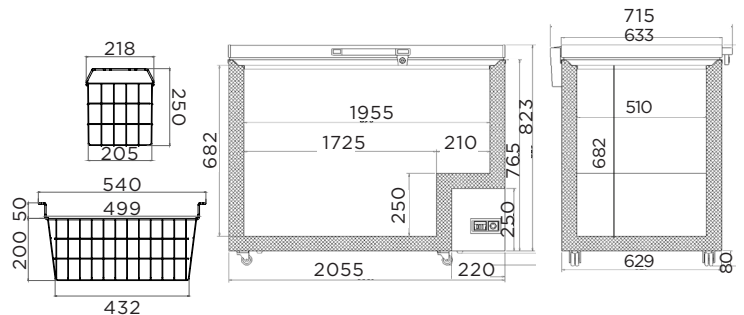5 YEAR EXTRA CARE WARRANTY**Storage Chest Freezer (Stainless Steel Top)****CF0700FTSS-NR**

Part No.	Volume	Weight	
3735306-NR	675L	119kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	2055	1935	2145
Depth	715	510	750
Height	903	682	1005

- Temperature range: -25°C to -15°C
- Max ambient temp: 35°C
- 8 stars GEMS rating
- 4L1 climate class
- 3 baskets included
- Integrated lock system

5 YEAR EXTRA CARE WARRANTY

Ice Cream Display Freezer

A versatile display solution for your ice cream or gelato that can double as a chest freezer. Featuring a sliding glass lid, curved canopy and distinctive style, this unit is the perfect front-of-house ice cream or gelato display freezer.

The sliding lid minimises energy consumption by effectively preserving the cool temperature of the products on display

The tilted display with a curved canopy offers great visibility of the ice cream on display, while creating a physical barrier between ice cream and customers to ensure hygiene



Enjoy the convenience of 7 plastic 5L tubs included with the display freezer, providing ample storage space for a variety of ice cream and gelato flavors

Reduce your energy consumption and operating costs with an 8-star GEMS rating, while also minimising your environmental impact thanks to natural refrigerant

Castors make moving and positioning the display freezer in the most optimal spot a breeze

With included internal frame to accommodate baskets, this display freezer can also operate as a chest freezer when needed



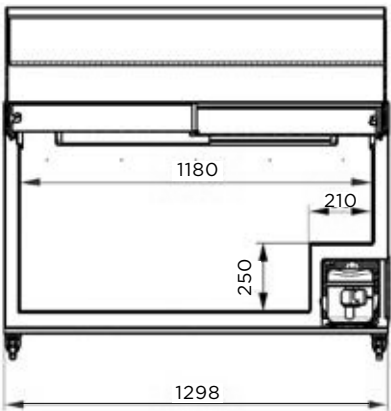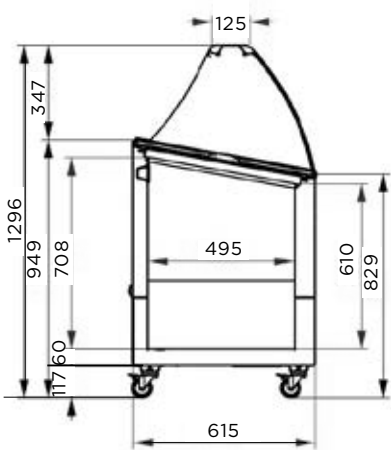

Ice Cream Display Chest Freezer (Gelato)

GD0007S-NR

Part No.	Volume	Weight
3735262-NR	352L	81kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1298	1180	1348
Depth	615	495	665
Height	1296	708	1346

- Temperature range: -22°C to -12°C
- Max ambient temp: 35°C
- 4L1 climate class
- 7 tubs included
- 8 star GEMS rating
- Canopy for visibility and hygiene
- Includes internal frame for baskets to operate as a chest freezer if needed
- Sliding lid with Integrated lock system

5 YEAR EXTRA CARE WARRANTY





Model	CF0200ATCG-NR	CF0300ATCG-NR	CF0400ATCG-NR
Part Number	3735301-NR	3735302-NR	3735303-NR
External Width (mm)*	719	1010	1298
External Depth (mm)*	615	615	615
External Height (mm)*	949	949	949
Volume	176L	264L	352L
Unit Weight	57kg	70kg	81kg
Adjustable Temp. Range	-22°C to -12°C	-22°C to -12°C	-22°C to -12°C
Max. Ambient Temp.	35°C	35°C	35°C
Climate Class	4L1	4L1	4L1
Energy Consumption	1.298kWh/24h	2.236kWh/24h	2.645kWh/24h
GEMS Star Rating	8 stars	7 stars	7 stars
Refrigeration Capacity	190W	220W	300W
Rated Current	0.5A	0.96A	1.1A
Electrical Voltage	220-240V	220-240V	220-240V
Refrigerant	R600a	R290	R290
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features			
Cord Length	2m	2m	2m
Internal Light	No	No	No
Number of Lids	2	2	2
Lid Type	Glass	Glass	Glass
Lid Style	Sliding	Sliding	Sliding
Lid Shape	Curved	Curved	Curved
Lid Lock	Yes	Yes	Yes
Number of Baskets	2	4	5
Basket Dimensions	206(w) x 434(d) x 195(h) mm	206(w) x 434(d) x 195(h) mm	206(w) x 434(d) x 195(h) mm
Defrost System	Manual	Manual	Manual
Air Circulation	Static	Static	Static
Temp. Controller	Analogue controller, digital display	Analogue controller, digital display	Analogue controller, digital display
Feet / Castors	Yes	Yes	Yes
Colour	White	White	White
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes



SPECIAL ORDER

SPECIAL ORDER

Model	CF0500ATCG-NR	CF0600ATCG-NR	CF0200FTFG-NR	CF0300FTFG-NR
Part Number	3736203-NR	3736204-NR	3735308-NR	3735309-NR
External Width (mm)*	1548	1750	719	1010
External Depth (mm)*	615	615	629	629
External Height (mm)*	949	949	892	892
Volume	427L	555L	191L	296L
Unit Weight	96kg	114kg	58kg	70kg
Adjustable Temp. Range	-22°C to -12°C	-22°C to -12°C	-22°C to -12°C	-22°C to -12°C
Max. Ambient Temp.	35°C	35°C	35°C	35°C
Climate Class	4L1	4L1	4L1	4L1
Energy Consumption	3.76kWh/24h	3.962kWh/24h	1.298kWh/24h	2.236kWh/24h
GEMS Star Rating	6 stars	6 stars	8 stars	7 stars
Refrigeration Capacity	400W	420W	190W	220W
Rated Current	1.4A	1.5A	0.54A	0.7A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R600a	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Cord Length	2m	2m	2m	2m
Internal Light	No	No	No	No
Number of Lids	2	2	2	2
Lid Type	Glass	Glass	Glass	Glass
Lid Style	Sliding	Sliding	Sliding	Sliding
Lid Shape	Curved	Curved	Flat	Flat
Lid Lock	Yes	Yes	Yes	Yes
Number of Baskets	6	6	2	4
Basket Dimensions	206(w) x 434(d) x 195(h) mm	206(w) x 434(d) x 195(h) mm	205(w) x 432(d) x 202(h) mm	205(w) x 432(d) x 202(h) mm
Defrost System	Manual	Manual	Manual	Manual
Air Circulation	Static	Static	Static	Static
Temp. Controller	Analogue controller, digital display	Analogue controller, digital display	Analogue controller, digital display	Analogue controller, digital display
Feet / Castors	Yes	Yes	Yes	Yes
Colour	White	White	White	White
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	CF0400FTFG-NR	CF0500FTFG-NR	CF0700FTFG-NR
Part Number	3735310-NR	3735304-NR	3735305-NR
External Width (mm)*	1298	1548	2055
External Depth (mm)*	629	629	629
External Height (mm)*	892	892	892
Volume	401L	491L	670L
Unit Weight	80kg	101kg	120kg
Adjustable Temp. Range	-22°C to -12°C	-22°C to -12°C	-22°C to -12°C
Max. Ambient Temp.	35°C	35°C	35°C
Climate Class	4L1	4L1	4L1
Energy Consumption	2.645kWh/24h	3.76kWh/24h	3.57kWh/24h
GEMS Star Rating	7 stars	6 stars	7 stars
Refrigeration Capacity	300W	400W	440W
Rated Current	0.7A	1.08A	1.73A
Electrical Voltage	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features			
Cord Length	2m	2m	2m
Internal Light	No	No	No
Number of Lids	2	2	2
Lid Type	Glass	Glass	Glass
Lid Style	Sliding	Sliding	Sliding
Lid Shape	Flat	Flat	Flat
Lid Lock	Yes	Yes	Yes
Number of Baskets	5	6	8
Basket Dimensions	205(w) x 432(d) x 202(h) mm	205(w) x 432(d) x 202(h) mm	205(w) x 432(d) x 202(h) mm
Defrost System	Manual	Manual	Manual
Air Circulation	Static	Static	Static
Temp. Controller	Analogue controller, digital display	Analogue controller, digital display	Analogue controller, digital display
Feet / Castors	Yes	Yes	Yes
Colour	White	White	White
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes



Model	CF0300FTSS-NR	CF0500FTSS-NR	CF0700FTSS-NR	GD0007S-NR
Part Number	3735312-NR	3735307-NR	3735306-NR	3735262-NR
External Width (mm)*	1012	1552	2055	1298
External Depth (mm)*	715	715	715	615
External Height (mm)*	903	903	903	1296
Volume	296L	492L	675L	352L
Unit Weight	65kg	94kg	119kg	81kg
Adjustable Temp. Range	-25°C to -15°C	-25°C to -15°C	-25°C to -15°C	-22°C to -12°C
Max. Ambient Temp.	35°C	35°C	35°C	35°C
Climate Class	4L1	4L1	4L1	4L1
Energy Consumption	1.652kWh/24h	2.085kWh/24h	3.18kWh/24h	3.99kWh/24h
GEMS Star Rating	8 stars	9 stars	8 stars	8 stars
Refrigeration Capacity	175W	400W	425W	300W
Rated Current	1.2A	0.77A	1.65A	2.3A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Compressor Compartment
Features				
Cord Length	2m	2m	2m	-
Internal Light	LED	LED	No	Fluorescent
Number of Lids	1	1	1	2
Lid Type	Solid	Solid	Solid	Glass
Lid Style	Hinged	Hinged	Hinged	Sliding
Lid Shape	Flat	Flat	Flat	Curved
Lid Lock or Door Lock	Yes	Yes	Yes	Yes
Number of Baskets/Tubs	1	2	3	7
Basket/Tubs Dimensions	205(w) x 432(d) x 200(h) mm	205(w) x 432(d) x 200(h) mm	205(w) x 432(d) x 200(h) mm	165(w) x 360(d) x 120(h) mm
Defrost System	Manual	Manual	Manual	Manual
Air Circulation	Static	Static	Static	Static
Temp. Controller	Analogue controller, digital display	Analogue controller, digital display	Analogue controller, digital display	Analogue
Feet / Castors	Yes	Yes	Yes	Yes
Colour	White	White	White	White
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes

Dairy & Deli







Multideck Display Fridges

Elevate your product display with Bromic's Multideck Display Fridges. Available in full height and semi vertical styles, with a range of widths, these units can be used standalone or be combined to create a stylish, and convenient 'grab-and-go' refrigerated island in your store.

Semi Vertical Multideck Displays

Bromic's Semi Vertical Multideck Displays perfectly combine energy efficiency with contemporary style to create eye-catching display islands within your retail environment.

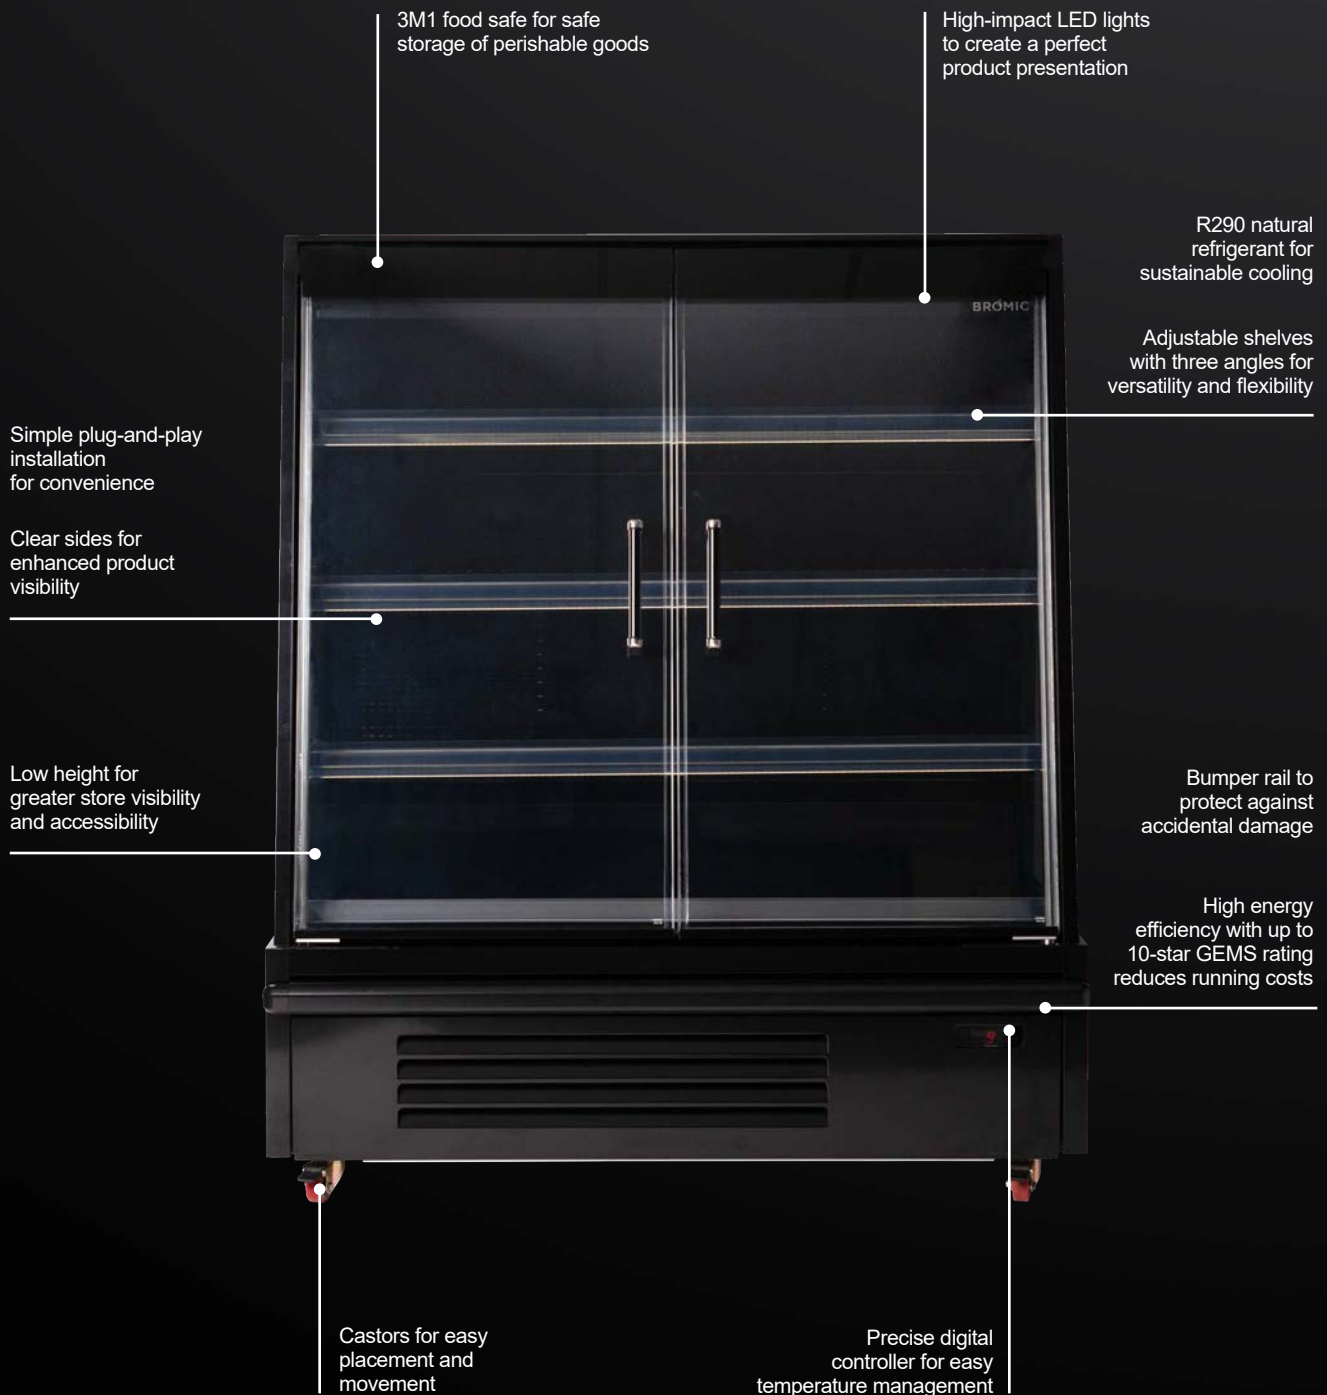

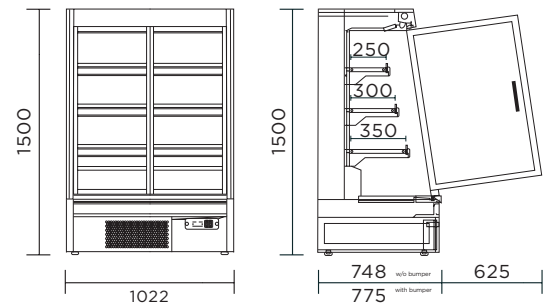
**Semi Vertical Display Fridge - 938mm - 2 Doors****SVM1000HD-NR**

Part No.	Volume	Weight
3335639-NR	332L	165kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1022	938	1100
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

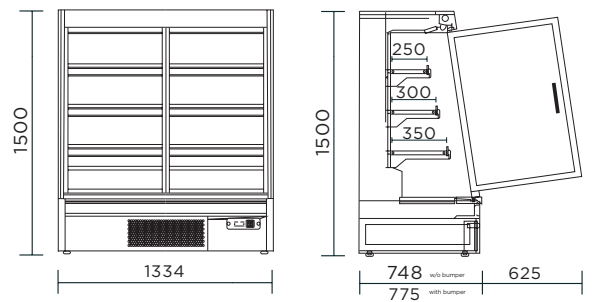
**Semi Vertical Display Fridge - 1250mm - 2 Doors****SVM1250HD-NR**

Part No.	Volume	Weight
3335640-NR	443L	190g

	External (mm)	Internal (mm)	Packaged (mm)
Width	1334	1250	1350
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

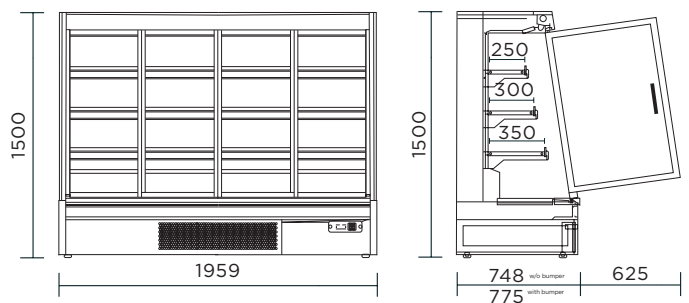**Semi Vertical Display Fridge - 1875mm - 4 Doors****SVM1875HD-NR**


Part No.	Volume	Weight
3335641-NR	664L	240kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1959	1875	2000
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone



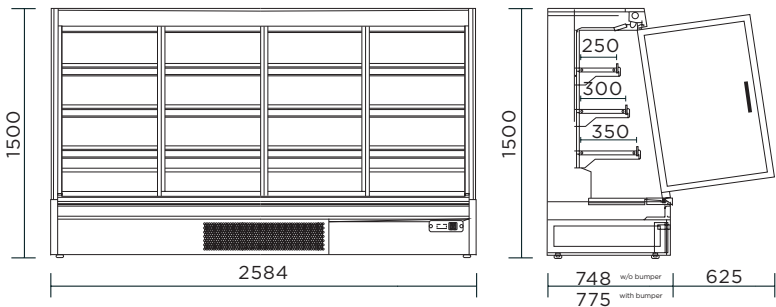


Semi Vertical Display Fridge - 2500mm - 4 Doors **SVM2500HD-NR**

Part No.	Volume	Weight
3335642-NR	885L	290kg
	External (mm)	Internal (mm)
Width	2584	2500
Depth	775	400
Height	1500	1050
	Packaged (mm)	
	2650	830
	1950	

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY

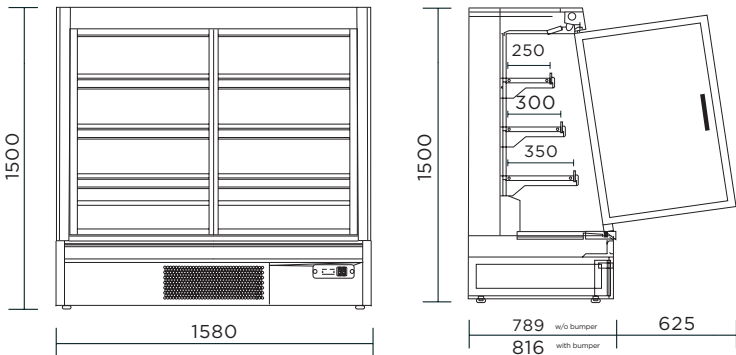


SPECIAL ORDER

Semi Vertical Display Fridge - Gondola - 1580mm **SVM1580HD-NR**

Part No.	Volume	Weight
3335643-NR	559L	220kg
	External (mm)	Internal (mm)
Width	1580	1496
Depth	775	400
Height	1500	1050
	Packaged (mm)	
	1650	830
	1950	

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY

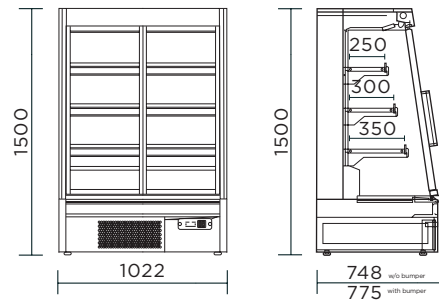
**Semi Vertical Display Fridge - 938mm - 2 Doors****SVM1000SD-NR**

Part No.	Volume	Weight
3335644-NR	332L	165kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1022	938	1100
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

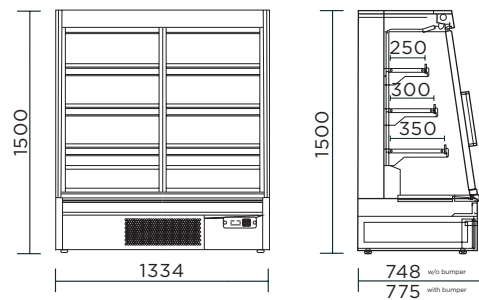
**Semi Vertical Display Fridge - 1250mm - 2 Doors****SVM1250SD-NR**

Part No.	Volume	Weight
3335645-NR	443L	190g

	External (mm)	Internal (mm)	Packaged (mm)
Width	1334	1250	1350
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable shelves with three angles plus base
- Digital temperature controller
- Can be combined or used standalone

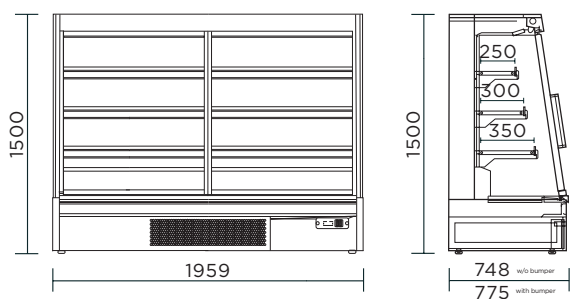
**Semi Vertical Display Fridge - 1875mm - 2 Doors****SVM1875SD-NR**

Part No.	Volume	Weight
3335646-NR	664L	240kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1959	1875	2000
Depth	775	400	830
Height	1500	1050	1950

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

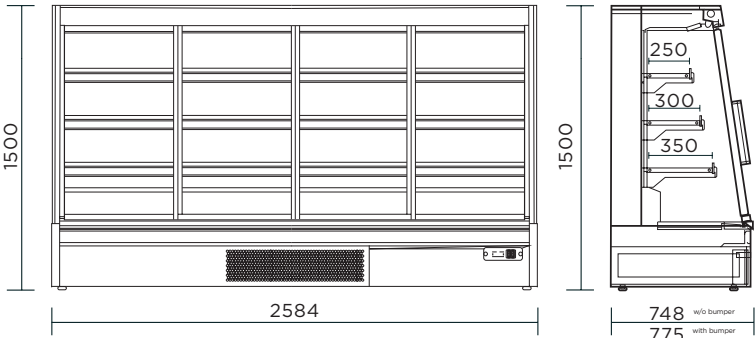


Semi Vertical Display Fridge - 2500mm - 4 Doors **SVM2500SD-NR**

Part No.	Volume	Weight	
3335647-NR	885L	290kg	

	External (mm)	Internal (mm)	Packaged (mm)
Width	2584	2500	2650
Depth	775	400	830
Height	1500	1050	1950

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY

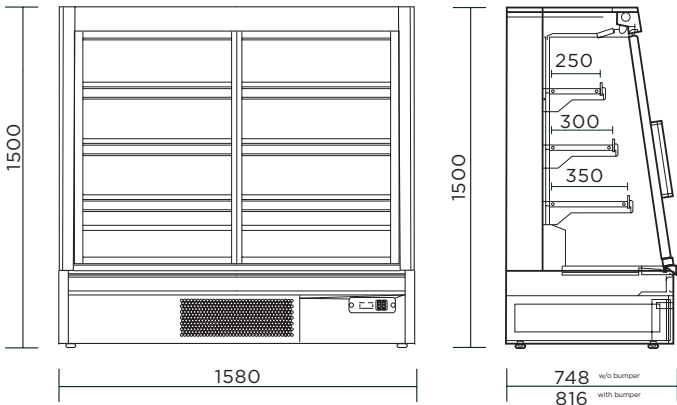

Semi Vertical Display Fridge - Gondola - 1580mm **SVM1580SD-NR**

Part No.	Volume	Weight	
3335648-NR	559L	220kg	

	External (mm)	Internal (mm)	Packaged (mm)
Width	1580	1496	1650
Depth	775	400	830
Height	1500	1050	1950

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- Climate Class: 3M1
- 3 adjustable and angled shelves tiers plus base
- Digital temperature controller
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY



SPECIAL ORDER



ISLAND CONFIGURATION CUSTOMISATION & OPTIONS

Contact your Bromic Sales representative to discuss custom configurations, design options and lead times.

Island Configuration:



OPTIONS EXTRA:



Extruded Bumper



Without Bumper

FRONT BUMPER

Combine functionality and aesthetics with our bumper options. Available in black (default) or grey plastic, stainless steel or no bumper.



PLEXIGLASS SHELF STOPPERS

Thin strip of plexiglass fitted to the edges of shelves, preventing products from sliding when tilted. Available in glass, mirrored or solid metal.




MIRROR END WALLS

Create the illusion of a larger space using mirrored internal and intermediate end walls.

Full Height Multideck Displays

Bromic's Full Height Multideck Displays offer a convenient open-front design while providing food-safe storage for perishable foods and drinks. Perfect for self-service refrigerated retail aisles.

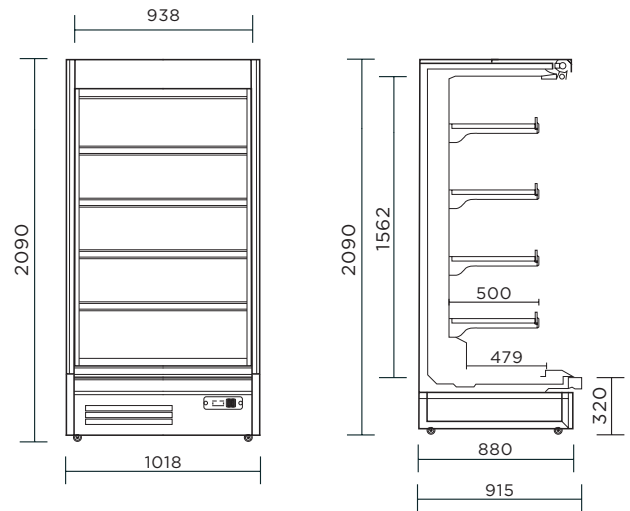

**Full Height Multideck Fridge - 938mm****FHM1000-NR****Full Height Multideck Fridge 2 doors - 938mm****FHM1000HD-NR**


Part No.	Volume	Weight
3335649-NR	611L	270kg
3335653-NR	611L	270kg

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- 5 Stars GEMS, 10 Star GEMS (HD fridge)
- Climate Class 3M1
- Retractable night blind
- Invisible Air Curtain technology
- Can be combined or used standalone

	External (mm)	Internal (mm)	Packaged (mm)
Width	1018	938	1188
Depth	915	680	980
Height	2090	1562	2350

5 YEAR EXTRA CARE WARRANTY**SPECIAL ORDER**

For FHM1000HD-NR

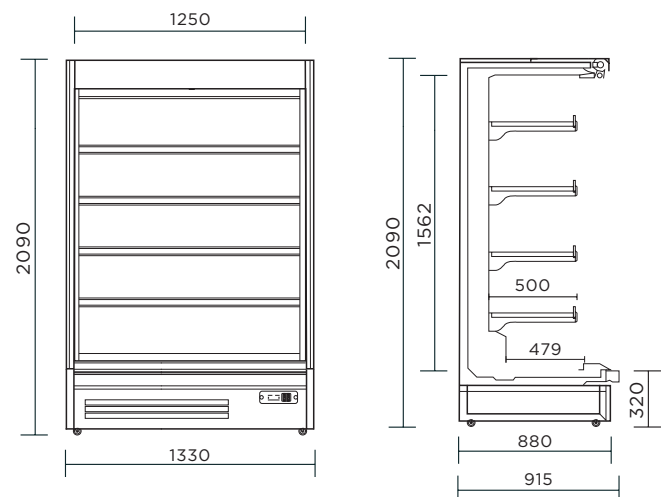**Full Height Multideck Fridge - 1250mm****FHM1250-NR****Full Height Multideck Fridge 2 doors - 1250mm****FHM1250HD-NR**



Part No.	Volume	Weight
3335650-NR	814L	336kg
3335654-NR	814L	336kg

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- 4 Stars GEMS, 10 Star GEMS (HD fridge)
- Climate Class 3M1
- Retractable night blind
- Invisible Air Curtain technology
- Can be combined or used standalone

	External (mm)	Internal (mm)	Packaged (mm)
Width	1330	1250	1500
Depth	915	680	980
Height	2090	1562	2350

5 YEAR EXTRA CARE WARRANTY**SPECIAL ORDER**

For FHM1250HD-NR

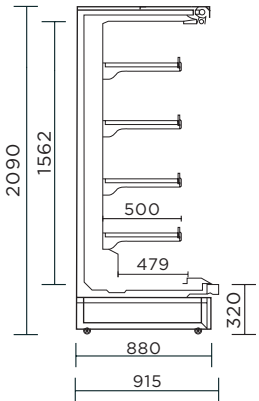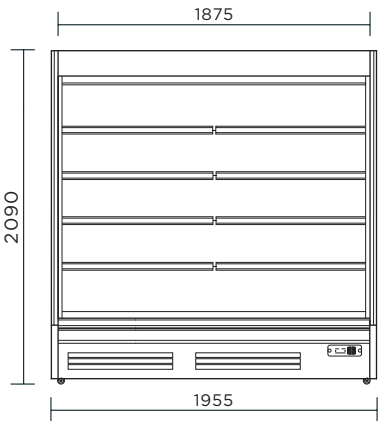

SPECIAL ORDER

For FHM1875HD-NR

Full Height Multideck Fridge - 1875mm

FHM1875-NR

Full Height Multideck Fridge 4 doors - 1875mm




FHM1875HD-NR

Part No.	Volume	Weight
3335651-NR	1222L	468kg
3335655-NR	1222L	468kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1955	1875	2125
Depth	915	680	980
Height	2090	1562	2350

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- 4 Stars GEMS, 9 Star GEMS (HD fridge)
- Climate Class 3M1
- Retractable night blind
- Invisible Air Curtain technology
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY

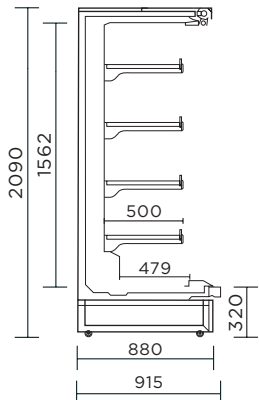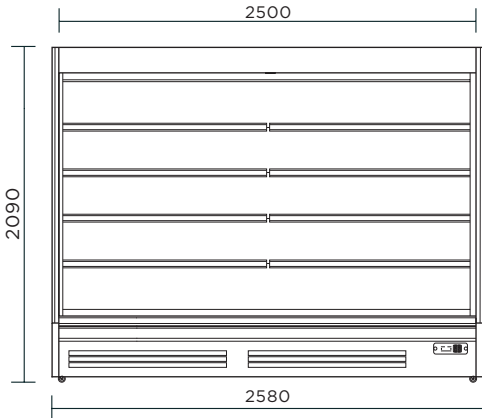

SPECIAL ORDER

For FHM2500HD-NR

Full Height Multideck Fridge - 2500mm

FHM2500-NR

Full Height Multideck Fridge 4 doors - 2500mm

FHM2500HD-NR

Part No.	Volume	Weight
3335652-NR	1629L	600kg
3335656-NR	1629L	600kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	2580	2500	2750
Depth	915	680	980
Height	2090	1562	2350

- Temperature range: -1°C to +10°C
- Max. ambient temp: 25°C
- 4 Stars GEMS, 8 Star GEMS (HD fridge)
- Climate Class 3M1
- Retractable night blind
- Invisible Air Curtain technology
- Can be combined or used standalone

5 YEAR EXTRA CARE WARRANTY



OPTIONS EXTRA:



Extruded Bumper

Without Bumper


FRONT BUMPER

Combine functionality and aesthetics with our bumper options. Available in black (default) or grey plastic, stainless steel or no bumper.



PLEXIGLASS SHELF STOPPERS

Thin strip of plexiglass fitted to the edges of shelves, preventing products from sliding when tilted. Available in glass, mirrored or solid metal.

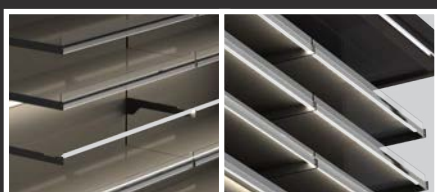

UNDERSHELF LIGHTING

Effectively illuminate products with a strip of LED lights attached to the underside of shelving.



MIRROR END WALLS

Create the illusion of a larger space using mirrored internal and intermediate end walls.



SPECIAL ORDER

Model	SVM1000HD-NR	SVM1250HD-NR	SVM1580HD-NR	SVM1875HD-NR	SVM2500HD-NR
Part Number	3335639-NR	3335640-NR	3335643-NR	3335641-NR	3335642-NR
Ext. Width (mm)*	1022	1334	1580	1959	2584
Ext. Depth (mm)*	775	775	816	775	775
Ext. Height (mm)*	1500	1500	1500	1500	1500
Volume	332L	443L	559L	664L	885L
Unit Weight	165kg	190kg	220kg	240kg	290kg
Total Display Area	1.44m ²	1.89m ²	2.20m ²	2.69m ²	3.49m ²
Adjustable Temp. Range	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C
Max. Ambient Temp.	25°C	25°C	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1	3M1	3M1
Energy Consumption	2.6kWh/24h	3.1kWh/24h	4.1kWh/24h	4.6kWh/24h	6.9kWh/24h
GEMS Star Rating	10 stars	10 stars	9 stars	9 stars	8 stars
Refrigeration Capacity	580W	583W	340W	829W	842W
Air Circulation	Fan Forced	Fan Forced	Fan Forced	Fan Forced	Fan Forced
Rated Current	2.52A	2.53A	1.48A	3.6A	3.66A
Electrical Voltage	230V	230V	230V	230V	230V
Refrigerant	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear	Rear	Rear	Rear	Rear
Features					
Internal Light	LED	LED	LED	LED	LED
Colour Temperature	4000K	4000K	4000K	4000K	4000K
Number of Doors	2	2	2	4	4
Door Type	Glass	Glass	Glass	Glass	Glass
Door Style	Hinged	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	625mm	625mm	625mm	625mm	625mm
Self-Closing Door	Yes	Yes	Yes	Yes	Yes
Door Lock	No	No	No	No	No
No. of Shelves Tiers incl. Base	4	4	4	4	4
Shelf Type	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle
Shelves Dimensions	933(w) x 250(d), 300(d), 350(d) mm	1245(w) x 250(d), 300(d), 350(d) mm	1570(w) x 250(d), 300(d), 350(d) mm	1866(w) x 250(d), 300(d), 350(d) mm	2490(w) x 250(d), 300(d), 350(d) mm
Air Curtain	Yes	Yes	Yes	Yes	Yes
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	Black	Black	Black	Black	Black
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



SPECIAL ORDER

Model	SVM1000SD-NR	SVM1250SD-NR	SVM1580SD-NR	SVM1875SD-NR	SVM2500SD-NR
Part Number	3335644-NR	3335645-NR	3335648-NR	3335646-NR	3335647-NR
Ext. Width (mm)*	1022	1334	1580	1959	2584
Ext. Depth (mm)*	775	775	816	775	775
Ext. Height (mm)*	1500	1500	1500	1500	1500
Volume	332L	443L	559L	664L	885L
Unit Weight	165kg	190kg	220kg	240kg	290kg
Total Display Area	1.44m ²	1.89m ²	2.2m ²	2.69m ²	3.49m ²
Adjustable Temp. Range	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C
Max. Ambient Temp.	25°C	25°C	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1	3M1	3M1
Energy Consumption	2.6kWh/24h	3.1kWh/24h	4.1kWh/24h	4.6kWh/24h	6.9kWh/24h
GEMS Star Rating	10 stars	10 stars	9 stars	9 stars	8 stars
Refrigeration Capacity	580W	583W	340W	829W	842W
Air Circulation	Fan Forced	Fan Forced	Fan Forced	Fan Forced	Fan Forced
Rated Current	2.52A	2.53A	1.48A	3.6A	3.66A
Electrical Voltage	230V	230V	230V	230V	230V
Refrigerant	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear	Rear	Rear	Rear	Rear
Features					
Internal Light	LED	LED	LED	LED	LED
Colour Temperature	4000K	4000K	4000K	4000K	4000K
Number of Doors	2	2	2	2	4
Door Type	Glass	Glass	Glass	Glass	Glass
Door Style	Sliding	Sliding	Sliding	Sliding	Sliding
Door Swing Dimension	-	-	-	-	-
Self-Closing Door	No	No	No	No	No
Door Lock	No	No	No	No	No
No. of Shelves Tiers incl. Base	4	4	4	4	4
Shelf Type	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle
Shelves Dimensions	933(w) x 250(d), 300(d), 350(d) mm	1245(w) x 250(d), 300(d), 350(d) mm	1570(w) x 250(d), 300(d), 350(d) mm	1866(w) x 250(d), 300(d), 350(d) mm	2490(w) x 250(d), 300(d), 350(d) mm
Air Curtain	Yes	Yes	Yes	Yes	Yes
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	Black	Black	Black	Black	Black
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



Model	FHM1000-NR	FHM1250-NR	FHM1875-NR	FHM2500-NR
Part Number	3335649-NR	3335650-NR	3335651-NR	3335652-NR
Ext. Width (mm)*	1018	1330	1955	2580
Ext. Depth (mm)*	915	915	915	915
Ext. Height (mm)*	2090	2090	2090	2090
Volume	611L	814L	1222L	1629L
Unit Weight	270kg	336kg	468kg	600kg
Total Display Area	2.16m ²	2.73m ²	4.06m ²	5.6m ²
Adjustable Temp. Range	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C
Max. Ambient Temp.	25°C	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	10.77kWh/24h	16.9kWh/24h	21.6kWh/24h	29.86kWh/24h
GEMS Star Rating	5 stars	4 stars	4 stars	4 stars
Refrigeration Capacity	809W	1058W	1631W	2116W
Air Circulation	Fan Forced	Fan Forced	Fan Forced	Fan Forced
Rated Current	3.52A	4.6A	7.09A	9.2A
Electrical Voltage	230V	230V	230V	230V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Colour Temperature	4000K	4000K	4000K	4000K
Door Type	--	--	--	--
Door Swing Dimension	--	--	--	--
Night Blind	Yes	Yes	Yes	Yes
No. of Shelves Tiers incl. Base	5	5	5	5
Shelf Type	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle
Shelves Dimensions	933(w) x 500(d) mm	1245(w) x 500(d) mm	1866(w) x 500(d) mm	2490(w) x 500(d) mm
Air Curtain	Yes	Yes	Yes	Yes
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Black	Black	Black	Black
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes

**SPECIAL ORDER**

Model	FHM1000HD-NR	FHM1250HD-NR	FHM1875HD-NR	FHM2500HD-NR
Part Number	3335653-NR	3335654-NR	3335655-NR	3335656-NR
Ext. Width (mm)*	1018	1330	1955	2580
Ext. Depth (mm)*	915	915	915	915
Ext. Height (mm)*	2090	2090	2090	2090
Volume	611L	814L	1222L	1629L
Unit Weight	270kg	336kg	468kg	600kg
Total Display Area	2.16m ²	2.73m ²	4.06m ²	5.6m ²
Adjustable Temp. Range	-1 to +10°C	-1 to +10°C	-1 to +10°C	-1 to +10°C
Max. Ambient Temp.	25°C	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	3.18kWh/24h	3.3kWh/24h	5.3kWh/24h	9.5kWh/24h
GEMS Star Rating	10 stars	10 stars	9 stars	8 stars
Refrigeration Capacity	257W	276W	340W	581W
Air Circulation	Fan Forced	Fan Forced	Fan Forced	Fan Forced
Rated Current	1.12A	1.2A	1.48A	2.52A
Electrical Voltage	230V	230V	230V	230V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Colour Temperature	4000K	4000K	4000K	4000K
Door Type	Glass	Glass	Glass	Glass
Door Swing Dimension	469mm	625mm	469mm	625mm
Number of Doors	2	2	4	4
No. of Shelves Tiers incl. Base	5	5	5	5
Shelf Type	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle	Adjustable height & angle
Shelves Dimensions	933(w) x 500(d) mm	1245(w) x 500(d) mm	1866(w) x 500(d) mm	2490(w) x 500(d) mm
Air Curtain	Yes	Yes	Yes	Yes
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Black	Black	Black	Black
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes





Deli Display Fridges

Bromic's range of Deli Display Fridges has been engineered with a focus on durability, practicality, and food safety. The displays can be used standalone or seamlessly combined to create a self-contained service area in your shop.

Deli Display Fridges & Accessories

Create an eye-catching display with our Deli Display Fridges. They feature a hydraulic lift-up glass and bright LED lighting to beautifully present your delicacies. These units can be used as standalone pieces or multiplexed to suit your specific needs.

Save on energy costs and reduce environmental impact with natural refrigerant

Bright LED lighting in natural light to enhance the presentation of displayed food

Rear bench provides convenient space for preparing and arranging your deli foods

The unit features removable display trays for easy cleaning plus removable front panel to quickly access and clean the unit for optimal performance

Choose between standalone use or multiplexing to expand the display area

Enjoy easy access to food items with the hydraulic lift-up front glass


Accurate temperature control with a digital controller

Additional refrigerated storage space at the back to maximise storage

Move the fridge around with ease thanks to castors

Specially designed for safe storage of perishable foods with 3M1 climate class certification

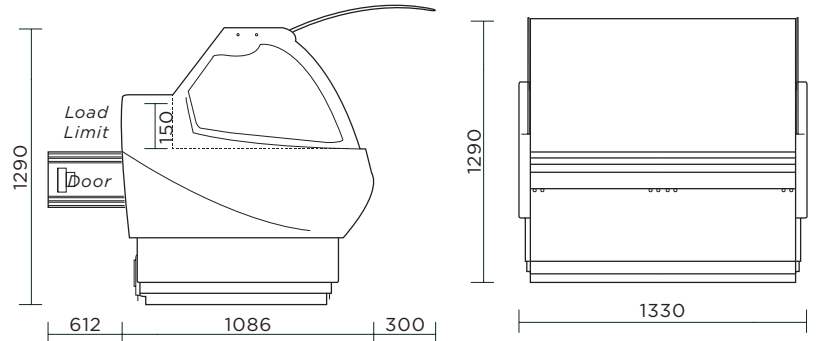


**Deli Display Fridge (Curved Glass)****DD1250CG-NR**

Part No.	Volume	Weight
3335636	351L	237kg

	External (mm)	Packaged (mm)
Width	1330	1350
Depth	1086	1180
Height	1290	1740

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 1 door
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone

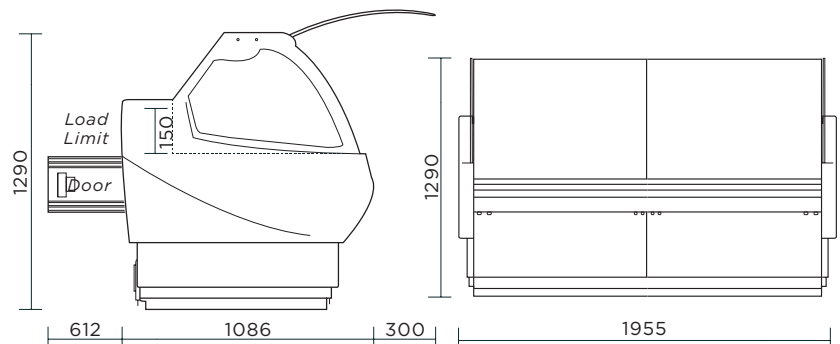
5 YEAR EXTRA CARE WARRANTY**Deli Display Fridge (Curved Glass)****DD1875CG-NR**

Part No.	Volume	Weight
3335637	527L	306kg

	External (mm)	Packaged (mm)
Width	1955	2000
Depth	1086	1180
Height	1290	1740

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 2 doors
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone

5 YEAR EXTRA CARE WARRANTY

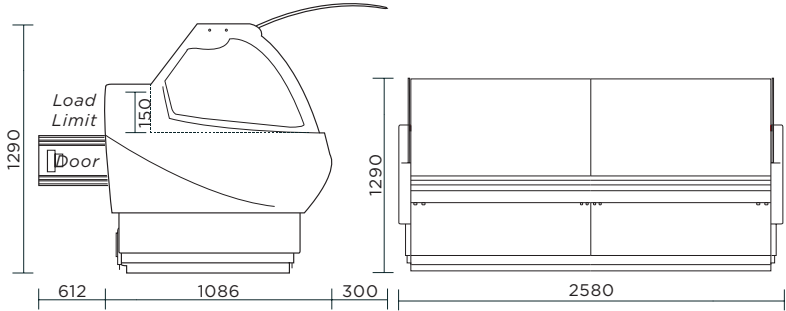


Deli Display Fridge (Curved Glass)

DD2500CG-NR

Part No.	Volume	Weight
3335638	703L	381kg
	External (mm)	Packaged (mm)
Width	2580	2650
Depth	1086	1180
Height	1290	1740

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 3 doors
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone

5 YEAR EXTRA CARE WARRANTY

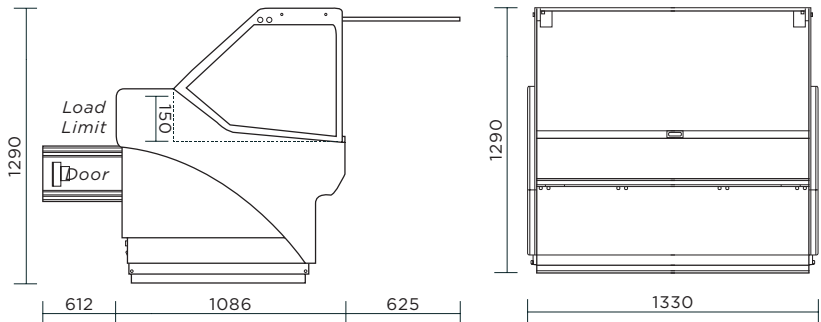


Deli Display Fridge (Square Glass)

DD1250SG-NR

Part No.	Volume	Weight
3335631	351L	237kg
	External (mm)	Packaged (mm)
Width	1330	1350
Depth	1086	1180
Height	1290	1740

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 1 door
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone

5 YEAR EXTRA CARE WARRANTY

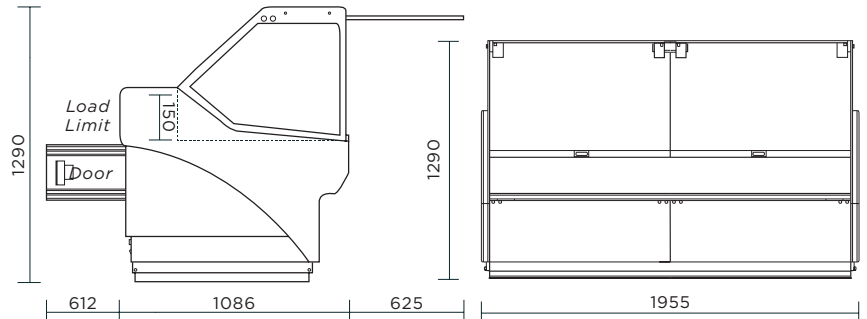

Deli Display Fridge (Square Glass)


DD1875SG-NR

Part No.	Volume	Weight
3335632	527L	306kg

	External (mm)	Packaged (mm)
Width	1955	2000
Depth	1086	1180
Height	1290	1740

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 2 doors
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone

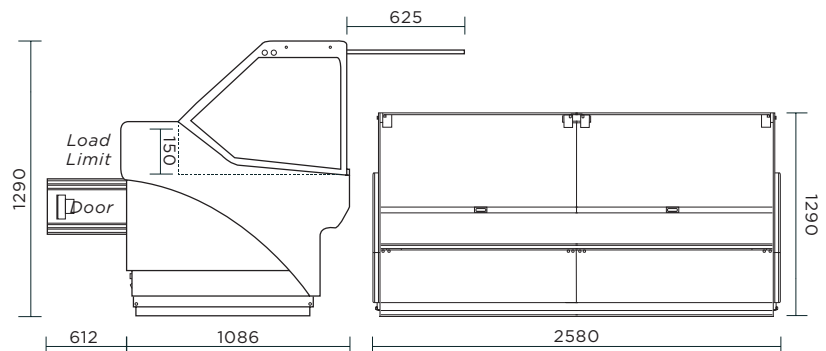

Deli Display Fridge (Square Glass)

DD2500SG-NR

Part No.	Volume	Weight
3335633	703L	381kg

	External (mm)	Packaged (mm)
Width	2580	2650
Depth	1086	1180
Height	1290	1740

5 YEAR EXTRA CARE WARRANTY

- Temperature range: -1°C to -10°C
- Max ambient temp: 25°C
- 3M1 climate class
- 3 doors
- Hydraulic lift-up front glass
- Digital temperature controller
- Can be multiplexed or used standalone





Deli Display Fridge (Accessory)

PAPER HOLDER

Part No. 3335630003

	External (mm)
Width	500
Depth	140
Height	200

- Keep wrapping paper or labels nearby within easy reach
- Compatible with Bromic curved and square deli display fridges
- Available as an optional accessory
- Purchased separately

5 YEAR EXTRA CARE WARRANTY



Deli Display Fridge (Accessory)


BAG HOLDER

Part No. 3335630002

	External (mm)
Width	420
Depth	110
Height	340

- Store your bags within close reach to serve your customers quicker
- Accommodates bags up to 330mm wide
- Compatible with Bromic curved and square deli display fridges
- Available as an optional accessory
- Purchased separately

5 YEAR EXTRA CARE WARRANTY

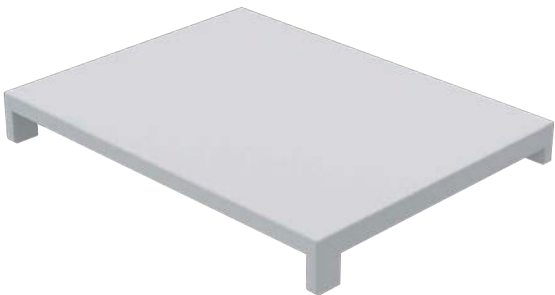

Deli Display Fridge (Accessory)

CUTTING BOARD

Part No. 3335630005

	External (mm)
Width	270
Depth	270
Height	40

- At 350mm wide, it provides additional room for food preparation
- Compatible with Bromic curved and square deli display fridges
- Available as an optional accessory
- Purchased separately

5 YEAR EXTRA CARE WARRANTY



Deli Display Fridge (Accessory)

KNIFE HOLDER

Part No. 3335630001

	External (mm)
Width	470
Depth	120
Height	460

- Keep your knives and workspace organised with 2 round slots for butchers steels and 7 knife slots of various sizes
- Compatible with Bromic curved and square deli display fridges
- Available as an optional accessory
- Purchased separately

5 YEAR EXTRA CARE WARRANTY



Deli Display Fridge (Accessory)

SCALE DECK

Part No. 3335630004

	External (mm)
Width	600
Depth	200
Height	90

- Easily weigh and portion food items, freeing up your workspace for efficient food preparation
- Compatible with Bromic curved and square deli display fridges
- Available as an optional accessory
- Purchased separately

5 YEAR EXTRA CARE WARRANTY



Model	DD1250CG-NR	DD1875CG-NR	DD2500CG-NR
Part Number	3335636	3335637	3335638
External Width (mm)*	1330	1955	2580
External Depth (mm)*	1086	1086	1086
External Height (mm)*	1290	1290	1290
Volume	351L	527L	703L
Unit Weight	237kg	306kg	381kg
Adjustable Temp. Range	-1°C to 10°C	-1°C to 10°C	-1°C to 10°C
Max. Ambient Temp.	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1
Energy Consumption	6.1kWh/24h	8.5kWh/24h	11.6kWh/24h
Hydraulic Lift-up System	Yes	Yes	Yes
Front Lifting Glass	Yes	Yes	Yes
Refrigeration Capacity	389W	497W	759W
Rated Current	1.69A	2.16A	3.30A
Electrical Voltage	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features			
Colour Temperature	4000K	4000K	4000K
Internal Light	LED	LED	LED
Number of Doors	1	2	3
Door Type	Solid	Solid	Solid
Door Style	Hinged	Hinged	Hinged
Door Lock	No	No	No
Door Swing Dimension	612mm	612mm	612mm
Total Depth of Door Open	1698mm	1698mm	1698mm
Rear Storage	Yes	Yes	Yes
Defrost System	Automatic	Automatic	Automatic
Air Circulation	Fan Forced	Fan Forced	Fan Forced
Temp. Controller	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes
Colour	Grey	Grey	Grey
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes



Model	DD1250SG-NR	DD1875SG-NR	DD2500SG-NR
Part Number	3335631	3335632	3335633
External Width (mm)*	1330	1955	2580
External Depth (mm)*	1086	1086	1086
External Height (mm)*	1290	1290	1290
Volume	351L	527L	703L
Unit Weight	237kg	306kg	381kg
Adjustable Temp. Range	-1°C to 10°C	-1°C to 10°C	-1°C to 10°C
Max. Ambient Temp.	25°C	25°C	25°C
Climate Class	3M1	3M1	3M1
Energy Consumption	6.1kWh/24h	8.5kWh/24h	11.6kWh/24h
Hydraulic Lift-up System	Yes	Yes	Yes
Front Lifting Glass	Yes	Yes	Yes
Refrigeration Capacity	389W	497W	759W
Rated Current	1.69A	2.16A	3.30A
Electrical Voltage	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features			
Colour Temperature	4000K	4000K	4000K
Internal Light	LED	LED	LED
Number of Doors	1	2	3
Door Type	Solid	Solid	Solid
Door Style	Hinged	Hinged	Hinged
Door Lock	No	No	No
Door Swing Dimension	625mm	625mm	625mm
Total Depth of Door Open	1721mm	1721mm	1721mm
Rear Storage	Yes	Yes	Yes
Defrost System	Automatic	Automatic	Automatic
Air Circulation	Fan Forced	Fan Forced	Fan Forced
Temp. Controller	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes
Colour	Grey	Grey	Grey
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes







Food Display Cabinets

Bromic's Food Display Cabinets are designed to encourage impulse purchases with their brightly lit displays. Available in Hot, Cold, and Ambient options, these cabinets come with matching profiles to ensure visual consistency.

Cake Displays

Our Cake Displays provide an elegant stage for your desserts and chilled offerings. They feature high-impact LED lighting and heated glass to prevent condensation, ensuring your offerings stand out at the point of sale.

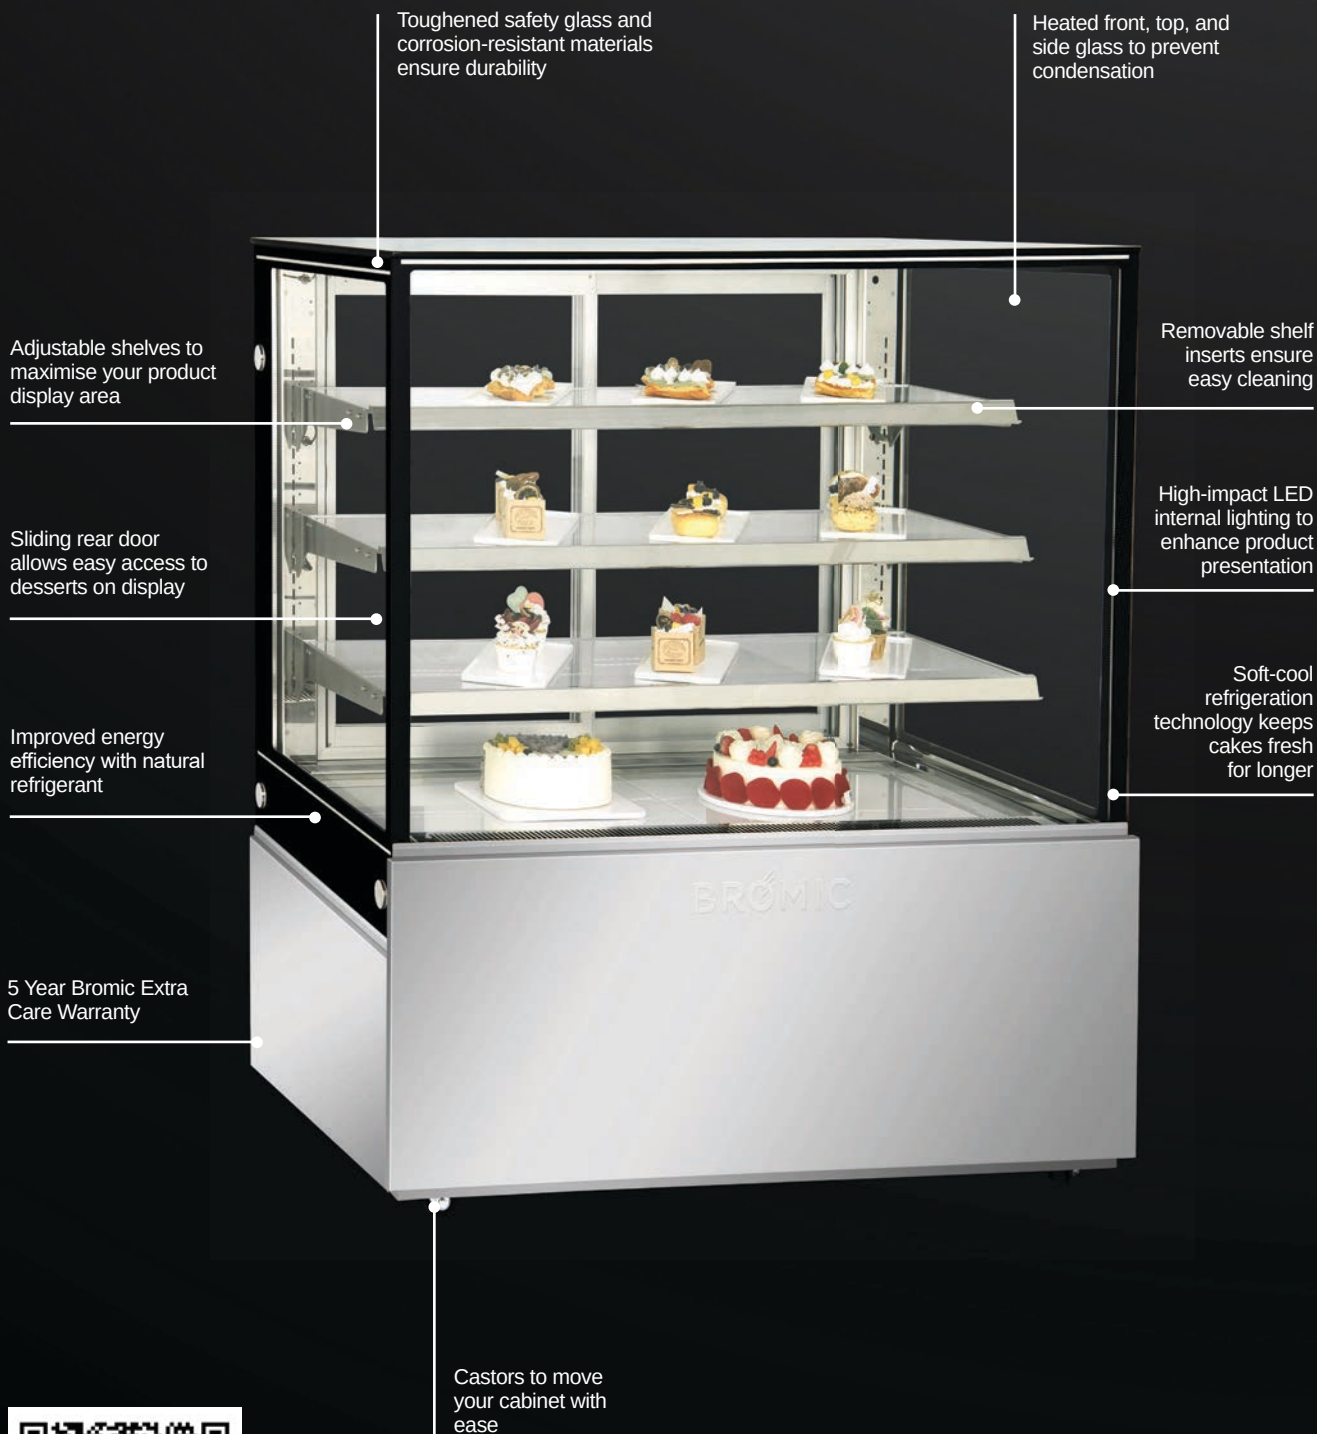

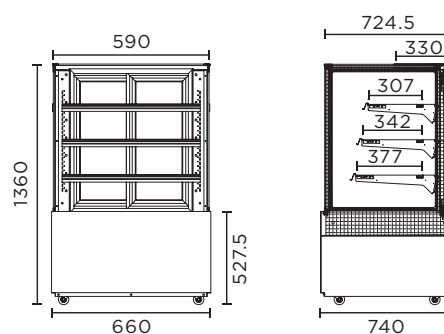

Cake display 660mm - 4 Tier


FD4T0660C-NR

Part No.	Volume	Weight
3736313-NR	300L	195kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	660	590	760
Depth	740	647	850
Height	1360	828	1510

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +1°C to +5°C
- Max. ambient temp: 32°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Heated front, top, and side glass
- Soft-cool refrigeration technology
- High-impact internal LED lighting

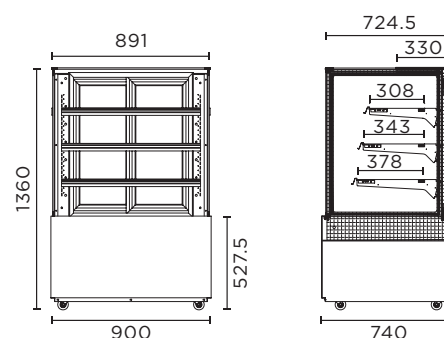

Cake display 900mm - 4 Tier


FD4T0900C-NR

Part No.	Volume	Weight
3736308-NR	417L	230g

	External (mm)	Internal (mm)	Packaged (mm)
Width	900	874	1000
Depth	740	647	850
Height	1360	828	1510

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +1°C to +5°C
- Max. ambient temp: 32°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Heated front, top, and side glass
- Soft-cool refrigeration technology
- High-impact internal LED lighting

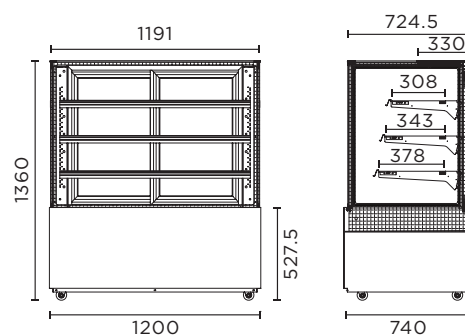

Cake display 1200mm - 4 Tier


FD4T1200C-NR

Part No.	Volume	Weight
3736309-NR	542L	282kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1174	1300
Depth	740	647	850
Height	1360	828	1510

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +1°C to +5°C
- Max. ambient temp: 32°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Heated front, top, and side glass
- Soft-cool refrigeration technology
- High-impact internal LED lighting

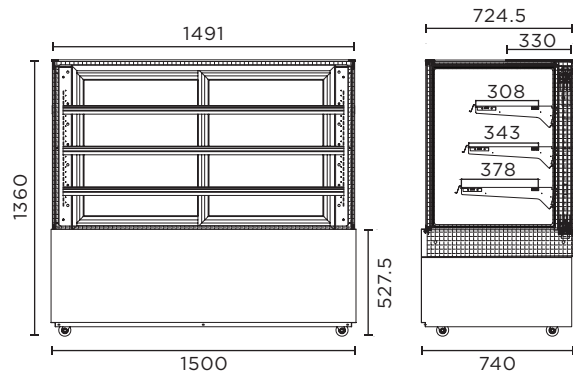

Cake display 1500mm - 4 Tier


FD4T1500C-NR

Part No.	Capacity	Weight	
3736310-NR	686L	319kg	

	External (mm)	Internal (mm)	Packaged (mm)
Width	1500	1474	1600
Depth	740	647	850
Height	1360	828	1510

- Temperature range: +1°C to +5°C
- Max. ambient temp: 32°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Heated front, top, and side glass
- Soft-cool refrigeration technology
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY

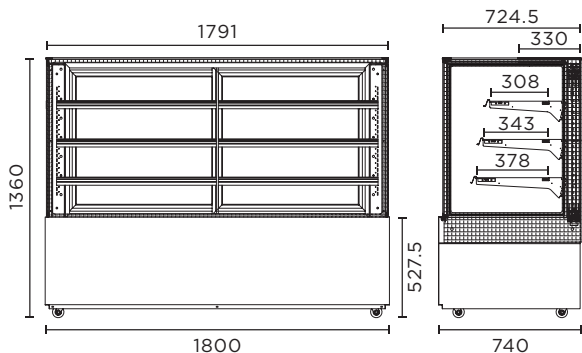

Cake display 1800mm - 4 Tier

FD4T1800C-NR

Part No.	Capacity	Weight	
3736311-NR	830L	344kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	1800	1774	1900
Depth	740	647	850
Height	1360	828	1510

- Temperature range: +1°C to +5°C
- Max. ambient temp: 32°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Heated front, top, and side glass
- Soft-cool refrigeration technology
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY



Brighten up your Bromic cake display with optional warm LED light strips, beautifully illuminating it with 3000K warm light. It exactly matches the internal lighting of your Bromic hot food display for a consistent display setup. Available in a range of sizes to suit your Bromic cake display model. Can be purchased separately.

Hot Food Displays

Our Hot Food Displays are designed to keep your hot delicacies enticingly warm and ready for service. Featuring all-side glass, internal LED lighting, and flexible shelving, these displays present hot favourites like pies and pastries in the most appetising way.

Grab customers' attention with bright LED lighting that highlights your products

Toughened safety glass and corrosion-resistant materials ensure durability

Adjustable shelves to maximise your product display area

Removable shelf inserts ensure easy cleaning



Serve and restock quickly with the slide rear door

Keep your food deliciously moist with the included bain-marie

5 Year Bromic Extra Care Warranty

Castors to move your cabinet with ease



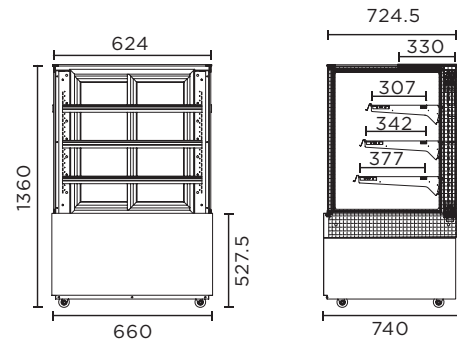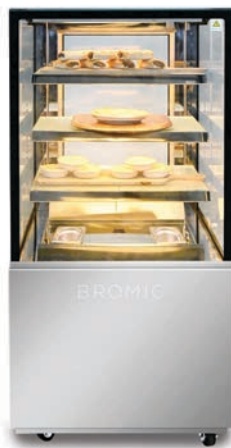


Hot food display 660mm - 4 Tier

FD4T0660H

Part No.	Capacity	Weight
3736312	300L	155kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	660	624	760
Depth	740	647	850
Height	1360	828	1510

- Temperature range: +50°C to +70°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Bain-marie to increase humidity retention when needed
- High-impact internal LED lighting

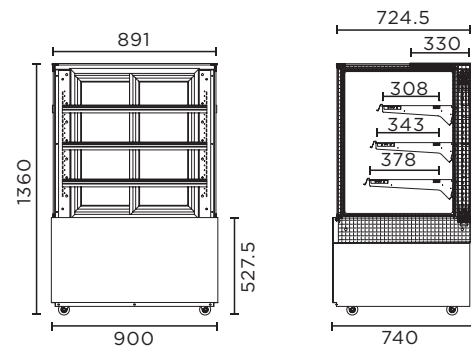5 YEAR EXTRA CARE WARRANTY


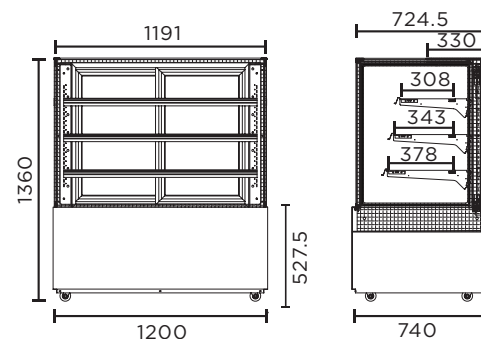
Hot food display 900mm - 4 Tier

FD4T0900H

Part No.	Capacity	Weight
3736304	417L	186kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	900	874	1000
Depth	740	647	850
Height	1360	828	1510

- Temperature range: +50°C to +70°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Bain-marie to increase humidity retention when needed
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY


Hot food display 1200mm - 4 Tier


FD4T1200H

Part No.	Capacity	Weight
3736305	542L	204kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1174	1300
Depth	740	647	850
Height	1360	828	1510

- Temperature range: +50°C to +70°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Bain-marie to increase humidity retention when needed
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY

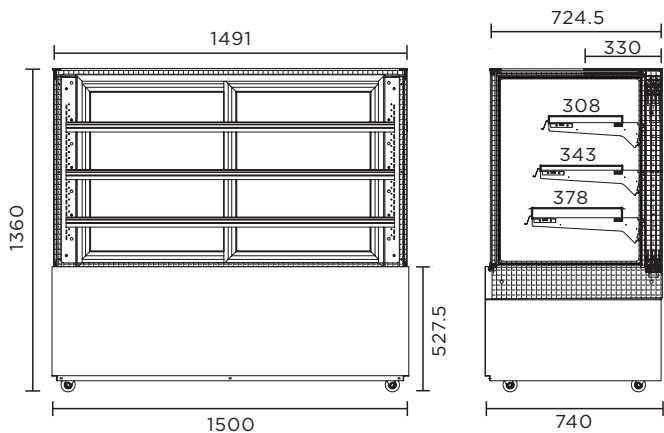


Hot food display 1500mm - 4 Tier

FD4T1500H

Part No.	Capacity	Weight
3736306	686L	223kg
	External (mm)	Internal (mm)
Width	1500	1474
Depth	740	647
Height	1360	828

- Temperature range: +50°C to +70°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Bain-marie to increase humidity retention when needed
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY

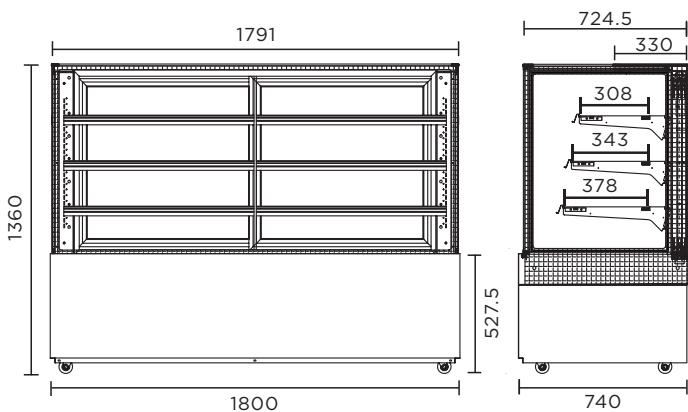

Hot food display 1800mm - 4 Tier

FD4T1800H

Part No.	Capacity	Weight
3736307	830L	242kg
	External (mm)	Internal (mm)
Width	1800	1774
Depth	740	647
Height	1360	828

- Temperature range: +50°C to +70°C
- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Bain-marie to increase humidity retention when needed
- High-impact internal LED lighting

5 YEAR EXTRA CARE WARRANTY

SPECIAL ORDER



ACCESSORIES:





WIRED SHELVES

Customise the look of your cake display with optional wire shelves to achieve a more industrial aesthetic. Available in a range of sizes to suit your Bromic cake display model. Can be purchased separately.

Ambient Food Displays

Our Ambient Food Display Cabinets are perfect for any bakery, café, or coffee shop, featuring a large display area, high-impact LED lighting, and adjustable shelves to maximise the number of treats you can fit.

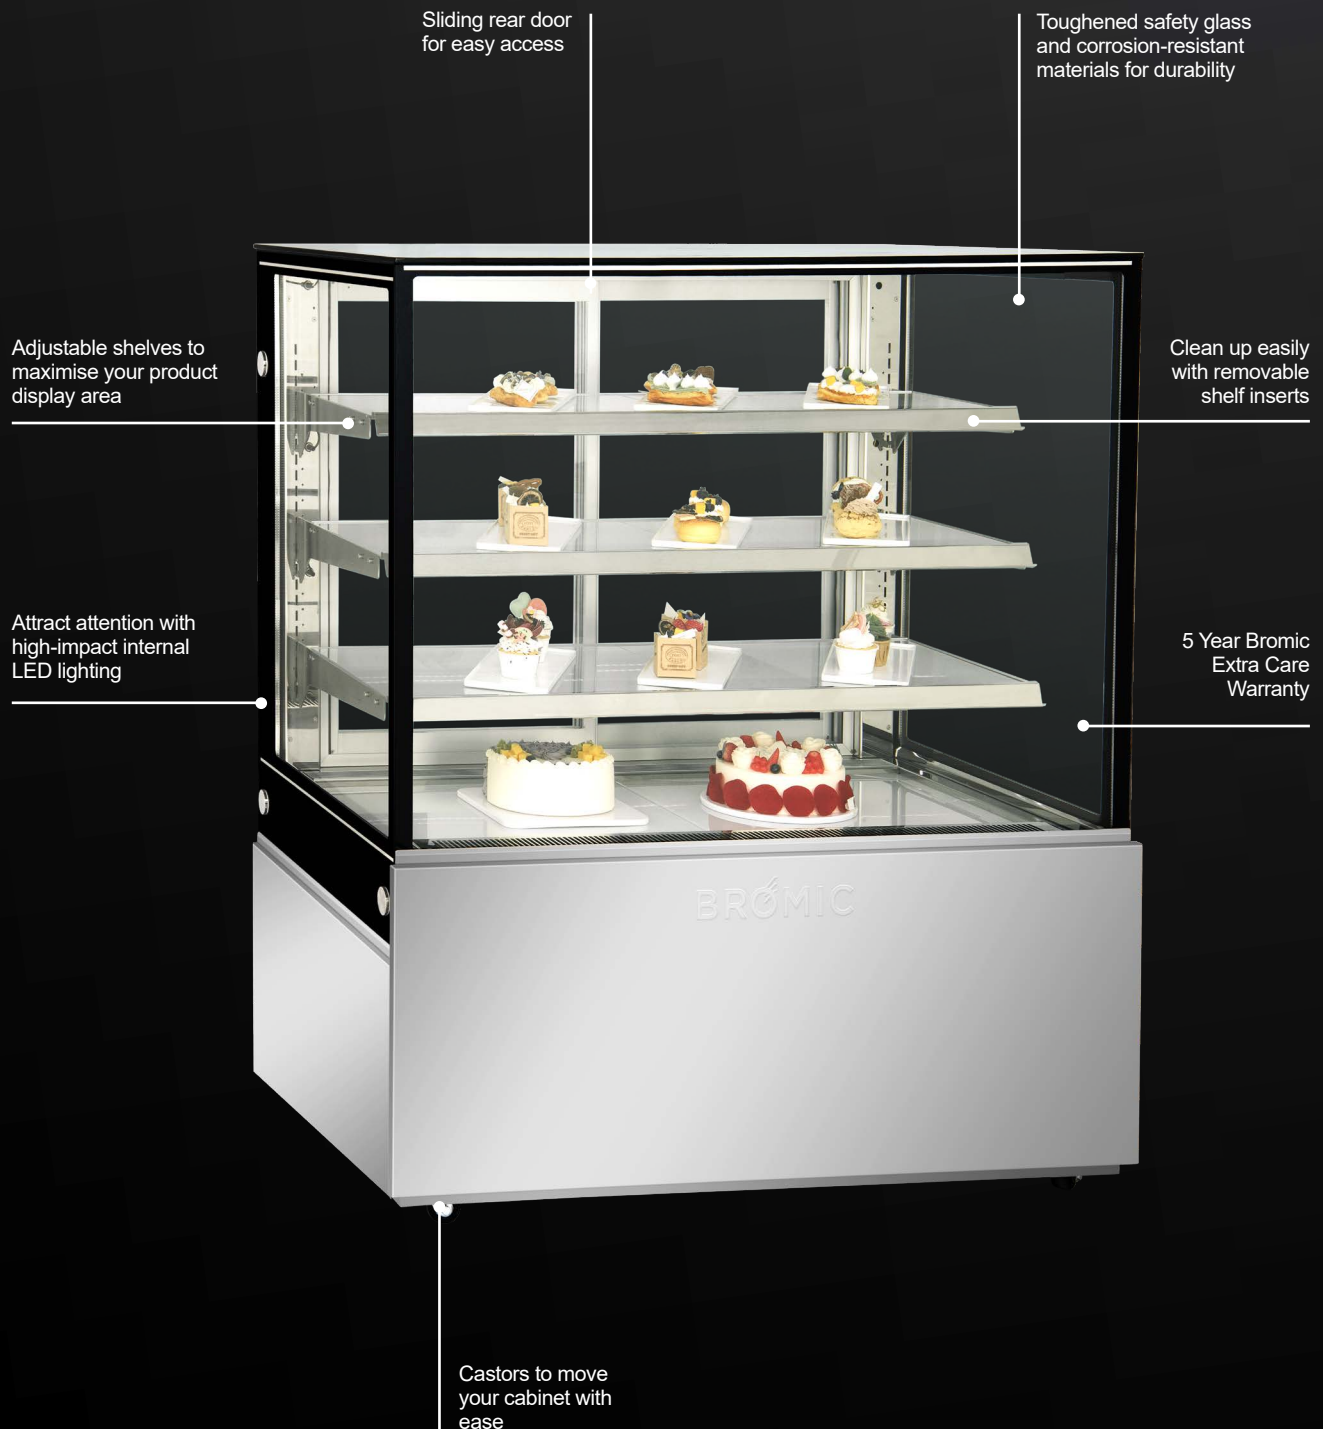

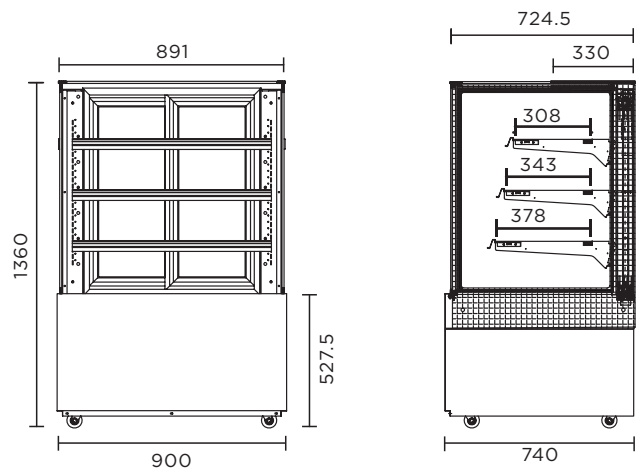

SPECIAL ORDER

Ambient food display 900mm - 4 Tier


FD4T0900A

Part No.	Capacity	Weight
3736300	417L	142kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	900	874	1000
Depth	740	647	850
Height	1360	828	1510

5 YEAR EXTRA CARE WARRANTY

- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Rear door for easy access
- High-impact internal LED lighting
- Removable shelf inserts for easy cleaning
- Castors to move your cabinet with ease

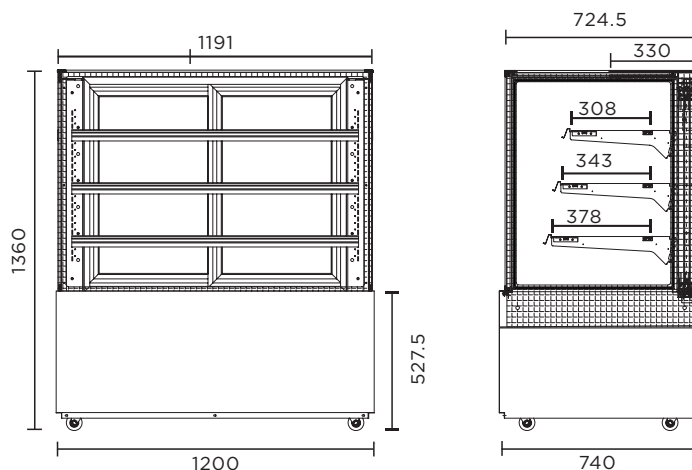

SPECIAL ORDER

Ambient food display 1200mm - 4 Tier


FD4T1200A

Part No.	Capacity	Weight
3736301	542L	174kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	874	1300
Depth	740	647	850
Height	1360	828	1510

5 YEAR EXTRA CARE WARRANTY

- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Rear door for easy access
- High-impact internal LED lighting
- Removable shelf inserts for easy cleaning
- Castors to move your cabinet with ease

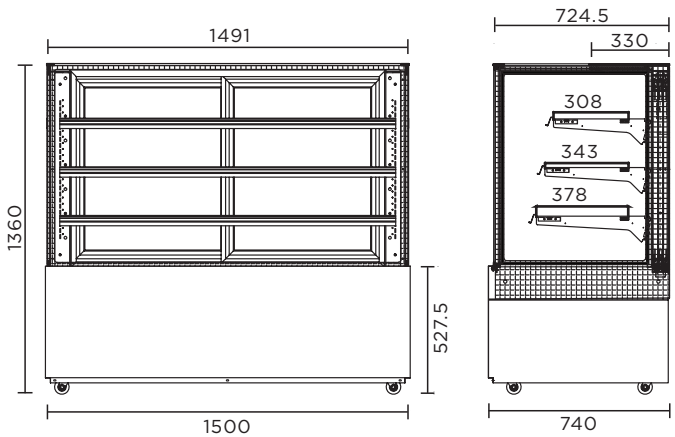

Ambient food display 1500mm - 4 Tier

FD4T1500A


Part No.	Capacity	Weight
3736302	686L	206kg
	External (mm)	Internal (mm)
Width	1500	1474
Depth	740	647
Height	1360	828

- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Rear door for easy access
- High-impact internal LED lighting
- Removable shelf inserts for easy cleaning
- Castors to move your cabinet with ease

5 YEAR EXTRA CARE WARRANTY



SPECIAL ORDER

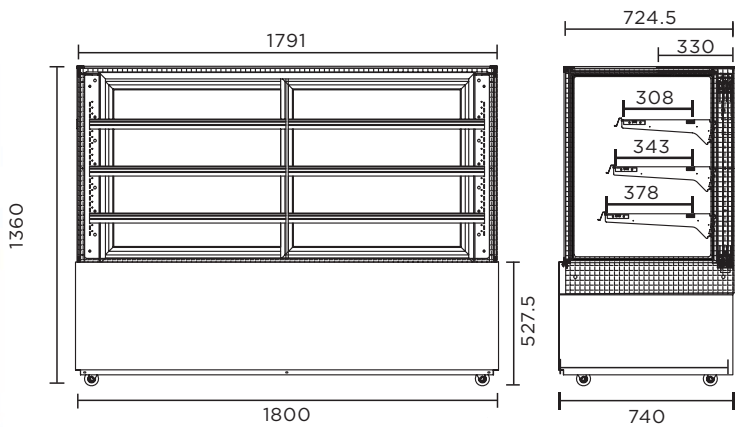

Ambient food display 1800mm - 4 Tier

FD4T1800A

Part No.	Capacity	Weight
3736303	830L	238kg
	External (mm)	Internal (mm)
Width	1800	1774
Depth	740	647
Height	1360	828

- 4 shelf tiers including base, adjustable to flat, 5° and 10° slant
- Rear door for easy access
- High-impact internal LED lighting
- Removable shelf inserts for easy cleaning
- Castors to move your cabinet with ease

5 YEAR EXTRA CARE WARRANTY



SPECIAL ORDER



ACCESSORIES:



WIRED SHELVES

Customise the look of your cake display with optional wire shelves to achieve a more industrial aesthetic. Available in a range of sizes to suit your Bromic cake display model. Can be purchased separately.



WARM LED LIGHTS

Brighten up your Bromic cake display with optional warm LED light strips, beautifully illuminating it with 3000K warm light. It exactly matches the internal lighting of your Bromic hot food display for a consistent display setup. Available in a range of sizes to suit your Bromic ambient display model. Can be purchased separately.



Model	FD4T0660C-NR	FD4T0900C-NR	FD4T1200C-NR	FD4T1500C-NR	FD4T1800C-NR
Part Number	3736313-NR	3736308-NR	3736309-NR	3736310-NR	3736311-NR
Ext. Width (mm)*	660	900	1200	1500	1800
Ext. Depth (mm)*	740	740	740	740	740
Ext. Height (mm)*	1360	1360	1360	1360	1360
Volume	300L	417L	542L	686L	830L
Unit Weight	195kg	230kg	282kg	319kg	344kg
Adjustable Temp. Range	+1 to +5°C	+1 to +5°C	+1 to +5°C	+1 to +5°C	+1 to +5°C
Max. Ambient Temp.	32°C	32°C	32°C	32°C	32°C
Climate Class	3M1	3M1	3M1	3M1	3M1
Energy Consumption	9.4kWh/24h	12.5kWh/24h	14.87kWh/24h	18.63kWh/24h	21.23kWh/24h
GEMS Star Rating	4 stars	4 stars	4 stars	4 stars	4 stars
Refrigeration Capacity	540W	700W	1000W	1220W	1360W
Rated Current	3A	4.1A	4.2A	5.4A	5.6A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features					
Internal Light	LED	LED	LED	LED	LED
Number of Doors	1	2	2	2	2
Door Type	Glass	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Sliding	Sliding	Sliding	Sliding
Door Swing Dimension	480mm	-	-	-	-
Total Depth of Door Open	1182mm	-	-	-	-
Self-Closing Door	No	No	No	No	No
Door Lock	-	-	-	-	-
Number of Shelf Tiers incl. Base	4	4	4	4	4
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	577(w) x 307(d) mm, 577(w) x 342(d) mm, 577(w) x 377(d) mm	817(w) x 307(d) mm, 817(w) x 342(d) mm, 817(w) x 377(d) mm	1117(w) x 307(d) mm, 1117(w) x 342(d) mm, 1117(w) x 377(d) mm	1417(w) x 307(d) mm, 1417(w) x 342(d) mm, 1417(w) x 377(d) mm	852(w) x 307(d) mm, 852(w) x 342(d) mm, 852(w) x 377(d) mm
Temp. Controller	Digital	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	-	-	-	-	-
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



SPECIAL ORDER

Model	FD4T0660H	FD4T0900H	FD4T1200H	FD4T1500H	FD4T1800H
Part Number	3736312	3736304	3736305	3736306	3736307
Ext. Width (mm)*	660	900	1200	1500	1800
Ext. Depth (mm)*	740	740	740	740	740
Ext. Height (mm)*	1360	1360	1360	1360	1360
Volume	300L	417L	542L	686L	830L
Unit Weight	155kg	186kg	204kg	223kg	242kg
Adjustable Temp. Range	+50 to +70°C	+50 to +70°C	+50 to +70°C	+50 to +70°C	+50 to +70°C
Max. Ambient Temp.	-	-	-	-	-
Climate Class	-	-	-	-	-
Energy Consumption	-	-	-	-	-
GEMS Star Rating	-	-	-	-	-
Rated Capacity	1138W	659W	1000W	1100W	3600W
Rated Current	4.7A	7.5A	9.9A	10A	15A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	-	-	-	-	-
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 15A	1 x 15A	1 x 15A	1 x 15A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right

Features

Internal Light	Fluorescent	Fluorescent	Fluorescent	Fluorescent	Fluorescent
Number of Doors	1	2	2	2	2
Door Type	Glass	Glass	Glass	Glass	Glass
Door Glass Type	Single Glazed	Single Glazed	Single Glazed	Single Glazed	Single Glazed
Door Style	Hinged	Sliding	Sliding	Sliding	Sliding
Door Swing Dimension	480mm	-	-	-	-
Total Depth of Door Open	1182mm	-	-	-	-
Self-Closing Door	No	No	No	No	No
Door Lock	-	-	-	-	-
Number of Shelf Tiers incl. Base	4	4	4	4	4
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	577(w) x 307(d) mm, 577(w) x 342(d) mm, 577(w) x 377(d) mm	817(w) x 307(d) mm, 817(w) x 342(d) mm, 817(w) x 377(d) mm	1117(w) x 307(d) mm, 1117(w) x 342(d) mm, 1117(w) x 377(d) mm	1417(w) x 307(d) mm, 1417(w) x 342(d) mm, 1417(w) x 377(d) mm	852(w) x 307(d) mm, 852(w) x 342(d) mm, 852(w) x 377(d) mm
Temp. Controller	Digital	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	-	-	-	-	-

Warranty

Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



SPECIAL ORDER				
Model	FD4T0900A	FD4T1200A	FD4T1500A	FD4T1800A
Part Number	3736300	3736301	3736302	3736303
Ext. Width (mm)*	900	1200	1500	1800
Ext. Depth (mm)*	740	740	740	740
Ext. Height (mm)*	1360	1360	1360	1360
Volume	417L	542L	686L	830L
Unit Weight	142kg	174kg	206kg	238kg
Adjustable Temp. Range	-	-	-	-
Max. Ambient Temp.	-	-	-	-
Climate Class	-	-	-	-
Energy Consumption	-	-	-	-
GEMS Star Rating	-	-	-	-
Refrigeration Capacity	-	-	-	-
Rated Current	0.2A	0.26A	0.35A	0.49A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	2	2	2	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Single Glazed	Single Glazed	Single Glazed	Single Glazed
Door Style	Sliding	Sliding	Sliding	Sliding
Door Swing Dimension	-	-	-	-
Total Depth of Door Open	-	-	-	-
Self-Closing Door	No	No	No	No
Door Lock	-	-	-	-
Number of Shelf Tiers incl. Base	4	4	4	4
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	817(w) x 307(d) mm, 817(w) x 342(d) mm, 817(w) x 377(d) mm	817(w) x 307(d) mm, 817(w) x 342(d) mm, 817(w) x 377(d) mm	1417(w) x 307(d) mm, 1417(w) x 342(d) mm, 1417(w) x 377(d) mm	852(w) x 307(d) mm, 852(w) x 342(d) mm, 852(w) x 377(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	-	-	-	-
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes








Commercial Ice Machines

Bromic's range of commercial Ice Machines encompasses both self-contained and modular types, available in various sizes, production capacities, and ice styles to meet the diverse ice production requirements of the hospitality, retail, mining, and other industries.

Self Contained Ice Machines

Bromic's Self-contained Ice Machines provide a versatile and compact ice-making solution. With a range of ice style options, they boast a space-saving design, ideal for locations with limited space.



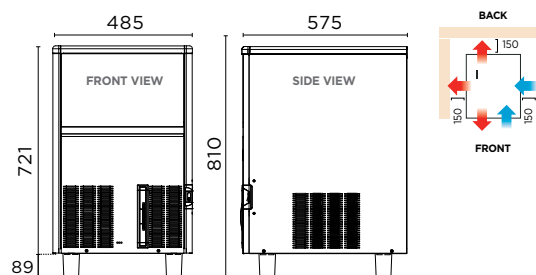

Self Contained 31kg Solid Cube Ice Machine


IM0032SSC

Part No.	Production	Storage
3935135	31kg*	17kg

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

	External (mm)	Packaged (mm)
Width	485	550
Depth	575	640
Height	721* ²	840

5 YEAR EXTRA CARE WARRANTY

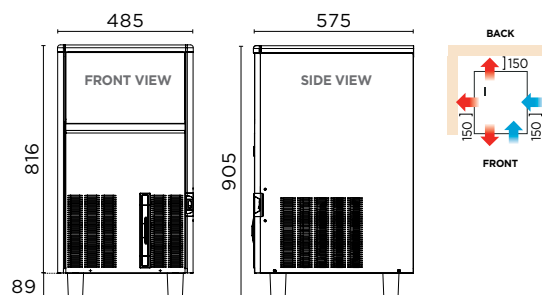

Self Contained 37kg Solid Cube Ice Machine


IM0043SSC

Part No.	Production	Storage
3935145	37kg*	20kg

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

	External (mm)	Packaged (mm)
Width	485	550
Depth	575	640
Height	816* ²	940

5 YEAR EXTRA CARE WARRANTY

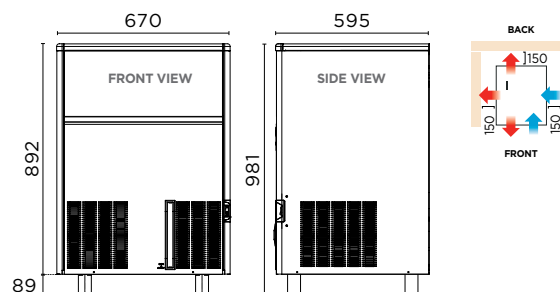

Self Contained 59kg Solid Cube Ice Machine

IM0065SSC


Part No.	Production	Storage
3935148	59kg*	33kg

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

	External (mm)	Packaged (mm)
Width	670	740
Depth	595	670
Height	892* ²	1080

5 YEAR EXTRA CARE WARRANTY

* Production is based on kg/24hr at 10°C air and 10°C Water
² External height excludes legs

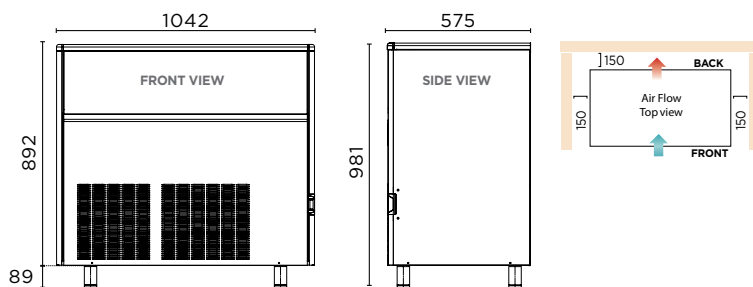


Self Contained 115kg Solid Cube Ice Machine

IM0113SSC

Part No.	Production	Storage
3935123	115kg*	50kg
External (mm)	Packaged (mm)	
Width	1042	1100
Depth	575	640
Height	892*2	1080

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

5 YEAR EXTRA CARE WARRANTY

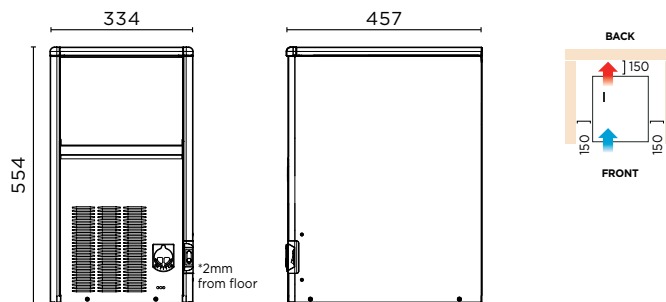


Self Contained 18kg Hollow Cube Ice Machine

IM0018HC-NR

Part No.	Production	Storage
3935190	17.5kg*2	4kg
External (mm)	Packaged (mm)	
Width	334	400
Depth	457	530
Height	554*2	660

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

5 YEAR EXTRA CARE WARRANTY

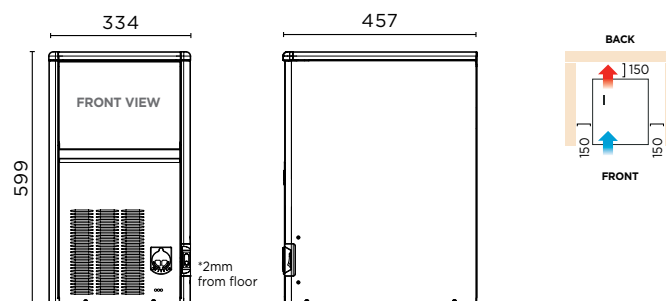

Self Contained 24kg Hollow Cube Ice Machine


IM0024HC-NR

Part No.	Production	Storage
3935191	24kg*	6kg
External (mm)	Packaged (mm)	
Width	334	400
Depth	457	530
Height	599*2	690

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Retractable door minimises protrusion, perfect for tight space installations
- Stainless steel construction for corrosion resistance and easy cleaning

5 YEAR EXTRA CARE WARRANTY


* Production is based on kg/24hr at 10°C air and 10°C Water
*2 External height excludes legs

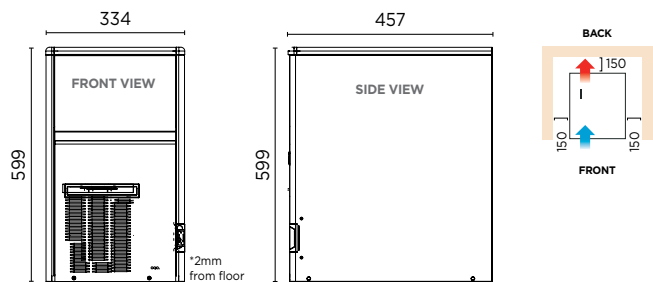

Self Contained 32kg Hollow Cube Ice Machine IM0032HC-NR

Part No.	Production	Storage	• Max. ambient temp: 40°C • Agion®-treated materials prevent bacteria growth • Retractable door minimises protrusion, perfect for tight space installations • Stainless steel construction for corrosion resistance and easy cleaning
3935192	32kg*	6kg	
	External (mm)	Packaged (mm)	
Width	334	400	
Depth	457	530	
Height	599*2	690	

5 YEAR EXTRA CARE WARRANTY

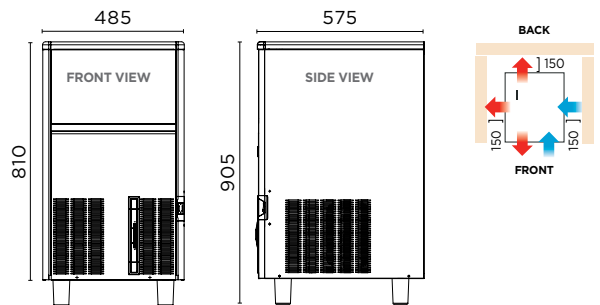

Self Contained 47kg Hollow Cube Ice Machine IM0050HC-NR


Part No.	Production	Storage	• Max. ambient temp: 40°C • Agion®-treated materials prevent bacteria growth • Retractable door minimises protrusion, perfect for tight space installations • Stainless steel construction for corrosion resistance and easy cleaning
3935193	47kg*	17kg	
	External (mm)	Packaged (mm)	
Width	485	550	
Depth	575	640	
Height	810*2	840	


5 YEAR EXTRA CARE WARRANTY

* Production is based on kg/24hr at 10°C air and 10°C Water
*2 External height excludes legs

Modular Ice Machines

Bromic's Modular Ice Machines are engineered for high-volume ice production needs. Their efficient cooling system ensures a steady ice supply even during peak demand.

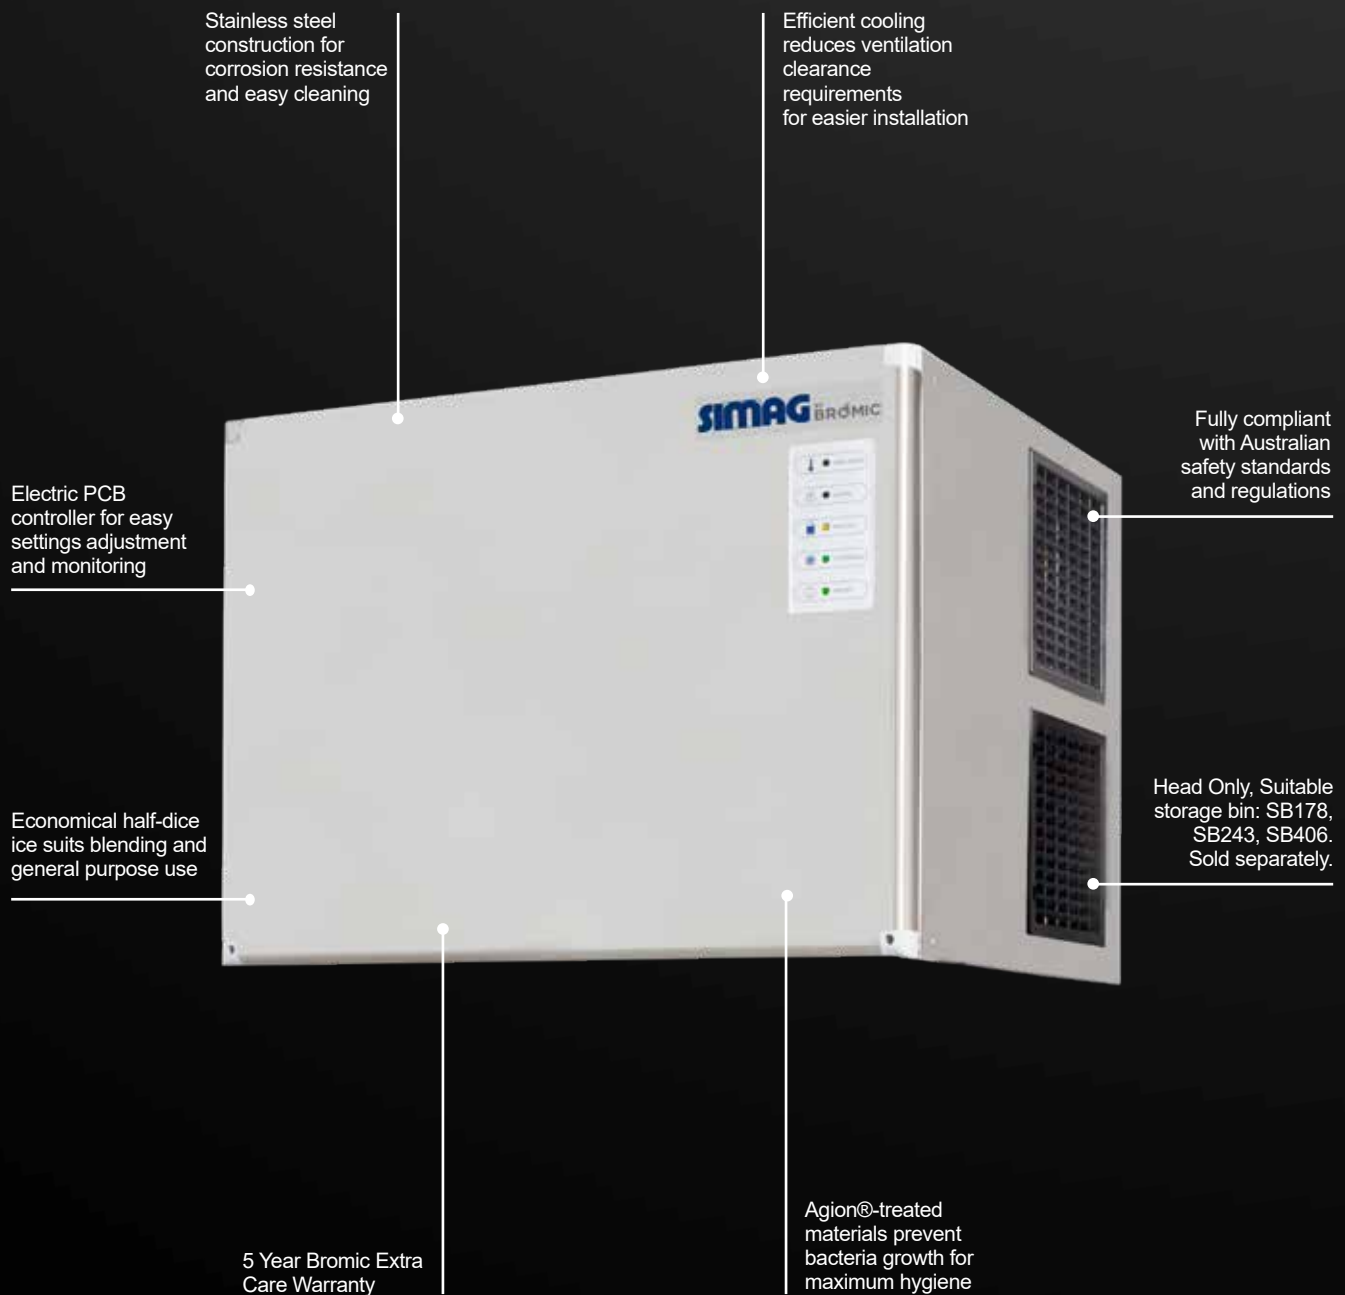

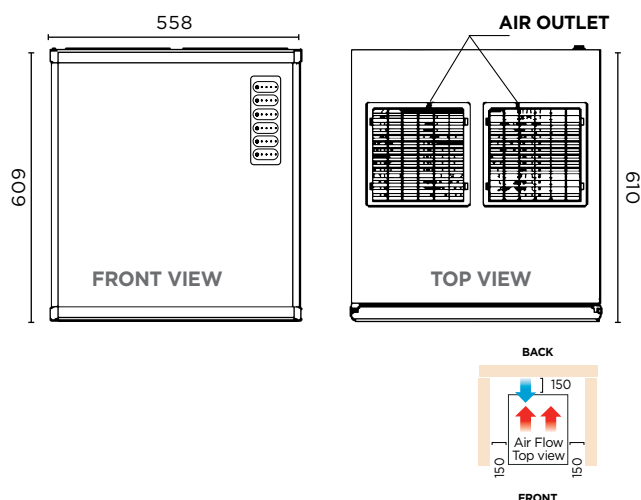

FULL VIEW OF
HEAD AND BIN
MODULAR HEAD
SHOWN ONLY




Modular 160kg Half-Dice Ice Machines

IM0160HDM

Part No.	Production	Weight
3935183	160kg*	55kg
	External (mm)	Packaged (mm)
Width	558	620
Depth	610	680
Height	609	800

5 YEAR EXTRA CARE WARRANTY

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB129, SB178, SB243

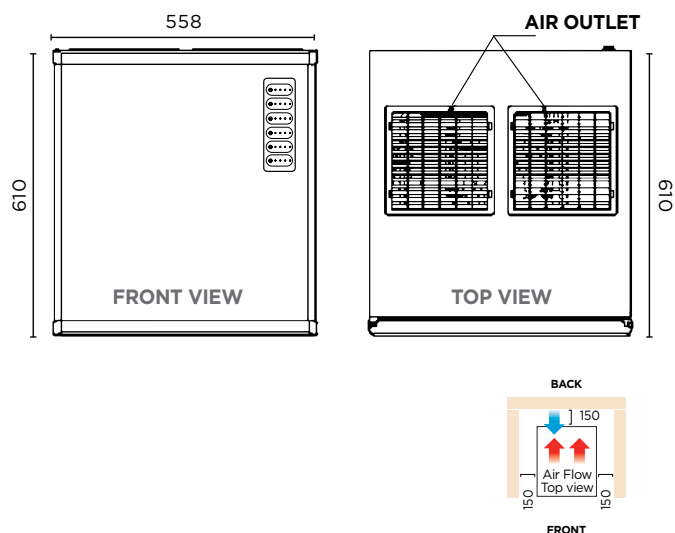

Modular 250kg Half-Dice Ice Machines


IM0250HDM

Part No.	Production	Weight
3935185	250kg*	65kg
	External (mm)	Packaged (mm)
Width	558	620
Depth	610	680
Height	610	800

5 YEAR EXTRA CARE WARRANTY

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB129, SB178, SB243

* Production is based on kg/24hr at 10°C air and 10°C Water

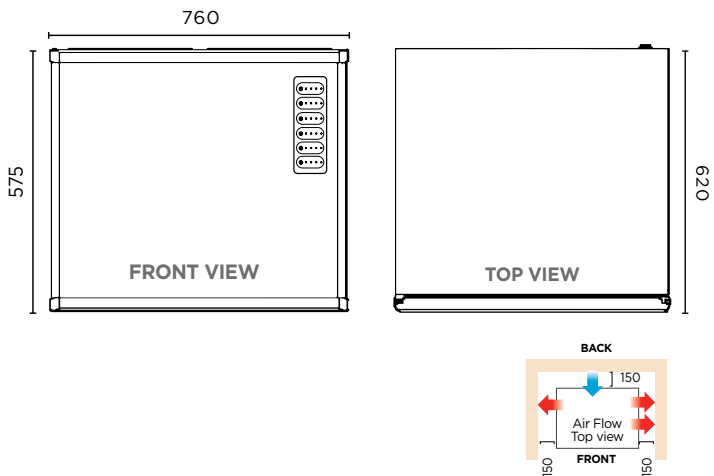


Modular 320kg Half-Dice Ice Machines

IM0320HDM

Part No.	Production	Weight
3935187	320kg*	73kg
	External (mm)	Packaged (mm)
Width	760	830
Depth	620	690
Height	575	770

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB129, SB178, SB243, SB406

5 YEAR EXTRA CARE WARRANTY

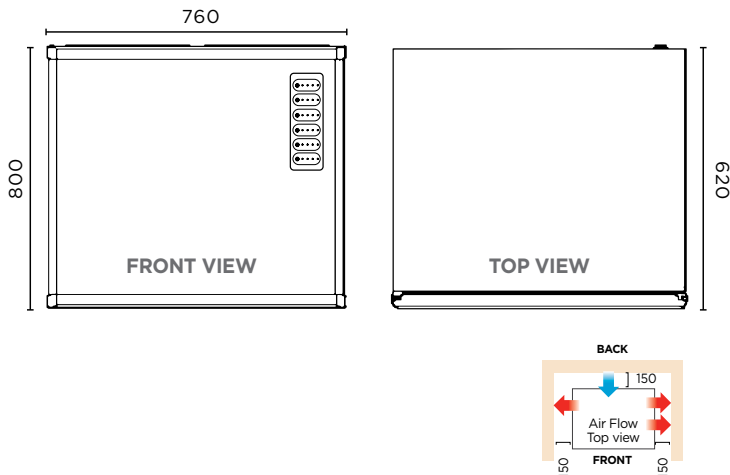

Modular 485kg Half-Dice Ice Machines


IM0485HDM

Part No.	Production	Weight
3935188	485kg*	104kg
	External (mm)	Packaged (mm)
Width	760	830
Depth	620	690
Height	800	770

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB178, SB243, SB406

5 YEAR EXTRA CARE WARRANTY

* Production is based on kg/24hr at 10°C air and 10°C Water

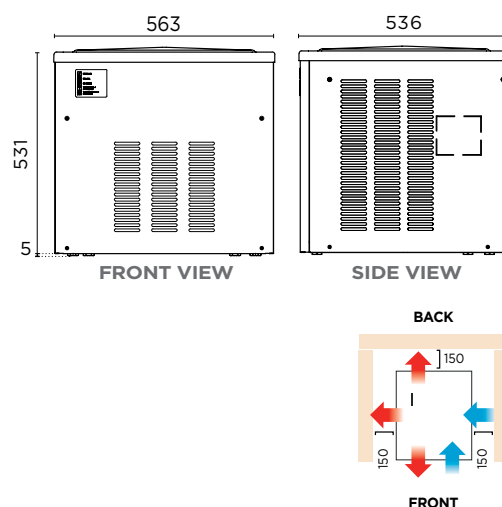


Modular Ice Machine Flake 200kg SIMAG

IM0200FM-NR

Part No.	Production	Weight
3935195	200kg*	49kg
	External (mm)	Packaged (mm)
Width	563	630
Depth	536	610
Height	531	680

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB129, SB178, SB243

5 YEAR EXTRA CARE WARRANTY

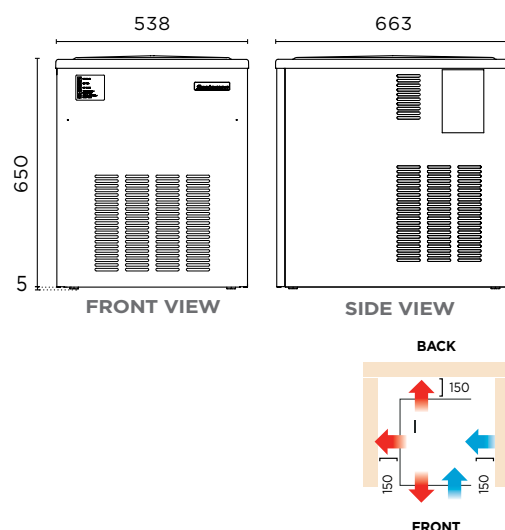

Modular Ice Machine Flake 300kg SIMAG


IM0300FM-NR

Part No.	Production	Weight
3935196	300kg*	78kg
	External (mm)	Packaged (mm)
Width	538	610
Depth	663	760
Height	650	820

- Max. ambient temp: 40°C
- Agion®-treated materials prevent bacteria growth
- Stainless steel construction for corrosion resistance and easy cleaning
- Compatible Ice Storage Bin: SB129, SB178, SB243, SB406

5 YEAR EXTRA CARE WARRANTY

* Production is based on kg/24hr at 10°C air and 10°C Water

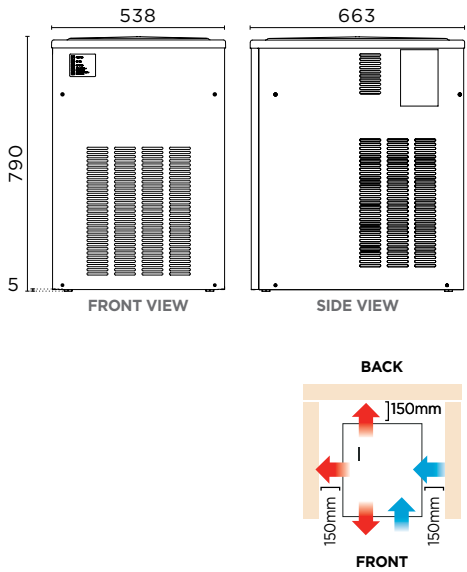

SPECIAL ORDER


Modular Ice Machine Flake 410kg SIMAG

IMO400FM-NR

Part No.	Production	Weight	• Max. ambient temp: 40°C • Agion®-treated materials prevent bacteria growth • Stainless steel construction for corrosion resistance and easy cleaning • Compatible Ice Storage Bin: SB129, SB178, SB243, SB406
3935197	410kg*	94kg	
	External (mm)	Packaged (mm)	
Width	538	610	
Depth	663	760	
Height	790	960	

5 YEAR EXTRA CARE WARRANTY

* Production is based on kg/24hr at 10°C air and 10°C Water

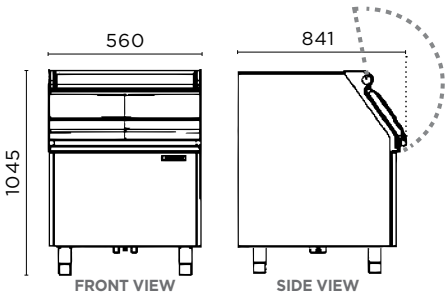

Ice Machine Storage Bin 129kg


SB129

Part No.	Capacity	Weight	• Storage bin capacity: 129kg • Stainless steel construction for corrosion resistance and easy cleaning • Insulated with polyurethane to slow down melting and maximise ice lifespan • Agion®-treated materials prevent bacteria growth
3935270	129kg	54kg	
	External (mm)	Packaged (mm)	
Width	560	610	
Depth	841	891	
Height	1045*	1095	

5 YEAR EXTRA CARE WARRANTY

* External height includes feet



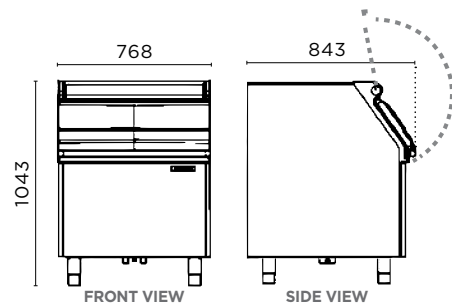

Ice Machine Storage Bin 178kg


SB178

Part No.	Capacity	Weight
3935271	178kg	62kg
	External (mm)	Packaged (mm)
Width	768	818
Depth	843	893
Height	1043*	1093

- Storage bin capacity: 178kg
- Stainless steel construction for corrosion resistance and easy cleaning
- Insulated with polyurethane to slow down melting and maximise ice lifespan
- Agion®-treated materials prevent bacteria growth

5 YEAR EXTRA CARE WARRANTY

* External height includes adjustable feet

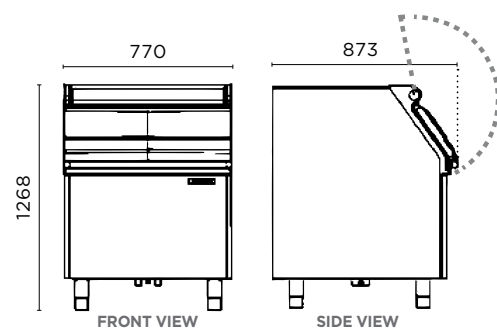

Ice Machine Storage Bin 243kg


SB243

Part No.	Capacity	Weight
3935272	243kg	68kg
	External (mm)	Packaged (mm)
Width	770	820
Depth	873	923
Height	1268*2	1318

- Storage bin capacity: 243kg
- Stainless steel construction for corrosion resistance and easy cleaning
- Insulated with polyurethane to slow down melting and maximise ice lifespan
- Agion®-treated materials prevent bacteria growth

5 YEAR EXTRA CARE WARRANTY

* External height includes feet

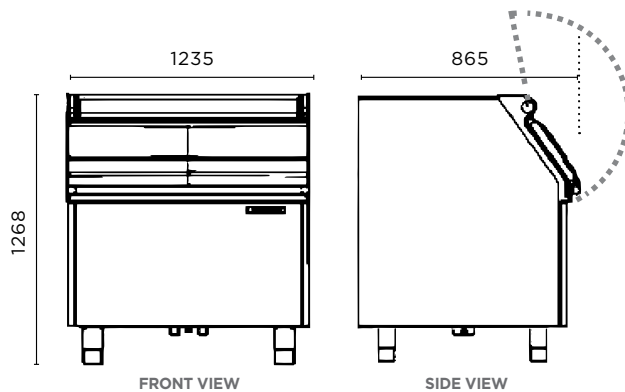

Ice Machine Storage Bin 406kg

SB406

Part No.	Capacity	Weight
3935273	406kg	104kg
	External (mm)	Packaged (mm)
Width	1235	1285
Depth	865	915
Height	1268*	1318

- Storage bin capacity: 406kg
- Stainless steel construction for corrosion resistance and easy cleaning
- Insulated with polyurethane to slow down melting and maximise ice lifespan
- Agion®-treated materials prevent bacteria growth

5 YEAR EXTRA CARE WARRANTY

* External height includes adjustable feet



Filter Housing
29004



Cartridge Filter
45004



Filter Kit
3935950

Complete Water Filtration Kit

Water Filters

Filter Housing

Cartridge Filter

Filter Kit

Part No.
29004

Part No.
45004

Part No.	Flow Rate
3935950	3.8Lpm

Connection
3/4"

Micron Rating	Connection
5	n/a

Include:
Filter Housing (29004)
Cartridge Filter (45004)

5 YEAR EXTRA CARE WARRANTY

Model	Type	Max Prod. 24 Hour*	Storage Capacity	Dimensions (W x D x H)	Ice Type
IM0032SSC	Self-Contained Solid Cube Ice	31kg	17kg	485 x 575 x 721	Solid Cube Ice 
IM0043SSC	Self-Contained Solid Cube Ice	37kg	20kg	485 x 575 x 816	
IM0065SSC	Self-Contained Solid Cube Ice	59kg	33kg	670 x 595 x 892	
IM0113SSC	Self-Contained Solid Cube Ice	115kg	50kg	1042 x 575 x 892	
IM0018HC-NR	Self-Contained Hollow Ice	18kg	4kg	334 x 457 x 554	Hollow Ice 
IM0024HC-NR	Self-Contained Hollow Ice	24kg	6kg	334 x 457 x 599	
IM0032HC-NR	Self-Contained Hollow Ice	32kg	6kg	334 x 457 x 599	
IM0050HC-NR	Self-Contained Hollow Ice	47kg	17kg	485 x 575 x 810	
IM0160HDM	Modular Half Ice	160kg	N/A	558 x 610 x 609	Half Dice Ice 
IM0250HDM	Modular Half Ice	250kg	N/A	558 x 610 x 610	
IM0320HDM	Modular Half Ice	320kg	N/A	760 x 620 x 575	
IM0485HDM	Modular Half Ice	485kg	N/A	760 x 620 x 800	
IM0200FM-NR	Modular Flake Ice	200kg	N/A	564 x 536 x 526	Flake Ice 
IM0300FM-NR	Modular Flake Ice	300g	N/A	538 x 663 x 645	
IM0400FM-NR	Modular Flake Ice	410kg	N/A	538 x 663 x 790	

*Production is based on kg/24hr at 10°C air and 10°C water

Modular Storage Bin Compatibility Chart					
Storage Bin Models		SB129	SB178	SB243	SB406
	Kg/24Hr	129Kg	178Kg	243Kg	406Kg
Modular Half-Dice Ice					
IM0160HDM	160Kg	✓	✓ + CBT30EMCD*	✓ + CBT30EMCD*	
IM0250HDM	250Kg	✓	✓ + CBT30EMCD*	✓ + CBT30EMCD*	
IM0320HDM	320Kg		✓	✓	✓ + CBT48EAMCD*
IM0485HDM	485Kg		✓	✓	✓ + CBT48EAMCD*
Modular Flake Ice					
IM0200FM-NR	200Kg	✓	✓ + CBT30EFSD*	✓ + CBT30EFSD*	
IM0300FM-NR	300Kg	✓ + CBT22EFCD*	✓ + CBT30EFSD*	✓ + CBT30EFSD*	✓ + CBT48FMCD*
IM0400FM-NR	410Kg	✓ + CBT22EFCD*	✓ + CBT30EFSD*	✓ + CBT30EFSD*	✓ + CBT48FMCD*

*Additional bin top required with purchase of particular modular bin



Model	IM0032SSC	IM0043SSC	IM0065SSC	IM0113SSC
Part Number	3935135	3935145	3935148	3935123
Ext. Width (mm)	485	485	780	595
Ext. Depth (mm)	575	575	705	640
Ext. Height (mm)*	721	816	2185	2100
Legs (mm)	89	89	89	89
Unit Weight	51kg	52kg	81kg	97kg
Packaged Weight	56kg	57kg	56kg	102kg
Ambient Temperature* ²	40°C	40°C	40°C	40°C
Energy Consumption	7.5 kWh/24h	10.5 kWh/24h	13 kWh/24h	24k Wh/24h
Refrigeration Capacity* ³	380W	530W	650W	1750W
Refrigerant	R134a	R134a	R134a	R404a
Current	2.2A	3.2A	3.8A	5.3A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Plug Supplied	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Ice Machine Type	Self-Contained	Self-Contained	Self-Contained	Self-Contained
Water Consumption* ⁴	3.75 L/h	3.1 L/h	9.0 L/h	20.8 L/h
Maximum Daily Production* ⁵	31 kg/24h	37 kg/24h	59 kg/24h	115 kg/24h
Ice type	Solid Cube	Solid Cube	Solid Cube	Solid Cube
Ice Weight	20g	20g	20g	20g
Storage Bin Capacity	17kg	20kg	33kg	50kg
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes

* External height excludes feet

*² Units operate in ambient conditions between 10°C and 40°C

*³ Power Input calculated at 43°C ambient

*⁴ Water Consumption calculated at 32°C air and 21°C water

*⁵ Production is based on kg/24hr at 10°C air and 10°C water



ARRIVING LATE 2024

Model	IM0018HC-NR	IM0024HC-NR	IM0032HC-NR	IM0050HC-NR
Part Number	3935190	3935191	3935192	3935193
Ext. Width (mm)	334	334	334	485
Ext. Depth (mm)	457	457	457	575
Ext. Height (mm)*	554	599	599	810
Legs (mm)	-	-	-	89
Unit Weight	28kg	28kg	28kg	45kg
Packaged Weight	33kg	33kg	33kg	53kg
Ambient Temperature* ²	40°C	40°C	40°C	40°C
Energy Consumption	4.9 kWh/24h	5 kWh/24h	5.95 kWh/24h	6.2 kWh/24h
Refrigeration Capacity* ³	250W	250W	250W	250W
Refrigerant	R290	R290	R290	R290
Current	1.2A	2.2A	2.2A	2.1A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Plug Supplied	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Ice Machine Type	Self-Contained	Self-Contained	Self-Contained	Self-Contained
Water Consumption* ⁴	1.9 L/h	3 L/h	3.8 L/h	2 L/h
Maximum Daily Production* ⁵	17.5 kg/24h	24 kg/24h	32 kg/24h	47 kg/24h
Ice type	Hollow Cube	Hollow Cube	Hollow Cube	Hollow Cube
Ice Weight	-	-	-	-
Storage Bin Capacity	4kg	6kg	6kg	17kg
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes

* External height excludes feet

*² Units operate in ambient conditions between 10°C and 40°C*³ Power Input calculated at 43°C ambient*⁴ Water Consumption calculated at 32°C air and 21°C water*⁵ Production is based on kg/24hr at 10°C air and 10°C water



Model	IM0160HDM	IM0250HDM	IM0320HDM	IM0485HDM
Part Number	3935183	3935185	3935187	3935188
Ext. Width (mm)	609	558	760	760
Ext. Depth (mm)	610	610	620	620
Ext. Height (mm)*	558	610	575	800
Legs (mm)	N/A	N/A	N/A	N/A
Unit Weight	45kg	65kg	73kg	104kg
Packaged Weight	50kg	70kg	78kg	109kg
Ambient Temperature* ²	40°C	40°C	40°C	40°C
Energy Consumption	15.9 kWh/24h	13.6 kWh/24h	16.3 kWh/24h	13.9 kWh/24h
Refrigeration Capacity* ³	950W	1250W	1600W	2500W
Refrigerant	R404a	R404a	R404a	R404a
Current	N/A	N/A	N/A	N/A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Plug Supplied	1 x 10A	1 x 16A	1 x 16A	1 x 30A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right

Features

Ice Machine Type	Modular	Modular	Modular	Modular
Water Consumption* ⁴	7.6 L/h	11L/h	15.6 L/h	22.3 L/h
Maximum Daily Production* ⁵	160 kg/24h	250 kg/24h	320 kg/24h	485 kg/24h
Ice type	Half Dice	Half Dice	Half Dice	Half Dice
Ice Weight	10g	10g	10g	10g
Storage Bin Capacity	SB129 SB178 SB243	SB129 SB178 SB243	SB129 SB178 SB243 SB406	SB178 SB243 SB406

Warranty

Parts & Labour (Years)* ⁶	3	3	3	3
Bromic Extra Care	Yes	Yes	Yes	Yes

Storage Bin	SB129	SB178	SB243	SB406
Part Number	3935270	3935271	3935272	3935273
Ext. Width (mm)	560	768	770	1235
Ext. Depth (mm)	843	843	873	865
Ext. Height (mm) Including feet	1045	1043* ⁶	1268	1268* ⁶
Storage Bin Capacity	129kg	178kg	243kg	406kg
Liner Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Gross Weight	54kg	62kg	68kg	104kg

Warranty

Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



ARRIVING LATE 2024

SPECIAL ORDER

SPECIAL ORDER

Model	IM0200FM-NR	IM0300FM-NR	IM0400FM-NR
Part Number	3935195	3935196	3935197
Ext. Width (mm)	563	538	538
Ext. Depth (mm)	536	663	663
Ext. Height (mm)*	531	650	650
Legs (mm)	5	5	5
Unit Weight	49kg	78kg	94kg
Packaged Weight	56kg	87kg	103kg
Ambient Temperature* ²	40°C	40°C	40°C
Energy Consumption	15.2 kWh/24h	22.7 kWh/24h	30.4 kWh/24h
Refrigeration Capacity* ³	700W	1000W	1390W
Refrigerant	R290	R290	R290
Current	4A	5.2A	10A
Electrical Voltage	220-240V	220-240V	220-240V
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Plug Supplied	1 x 10A	1 x 16A	1 x 16A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features			
Ice Machine Type	Modular	Modular	Modular
Water Consumption* ⁴	7.4 L/h	8 L/h	11.7 L/h
Maximum Daily Production* ⁵	200 kg/24h	300 kg/24h	410 kg/24h
Ice type	Flake	Flake	Flake
Ice Weight	-	-	-
Storage Bin Capacity	SB129 SB178 SB243	SB129 SB178 SB243 SB406	SB129 SB178 SB243 SB406
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes

* External height excludes feet

*² Units operate in ambient conditions between 10°C and 40°C*³ Power Input calculated at 43°C ambient*⁴ Water Consumption calculated at 32°C air and 21°C water*⁵ Production is based on kg/24hr at 10°C air and 10°C water





Medical & Vaccine Fridges

Bromic's Medical and Vaccine Fridges, approved by the Pharmacy Guild, offer a safe and dependable storage solution for temperature-sensitive stock, including vaccines, probiotics, and medications.

Medical & Vaccine Fridges + Accessory

Our Medical Fridges feature a built-in alarm system to prevent accidental exposure of your sensitive stock to warm temperatures. With consistent cooling performance, our fridges guarantee peace of mind temperature control and compliance with regulatory standards.

The min/max temperature recording feature allows you to track temperature fluctuations, providing valuable data for regulatory compliance and quality assurance

The alarm system ensures items are not accidentally overexposed to cold or warm temperatures, giving you peace of mind and protecting the integrity of your vaccines

With the integrated lock, you can keep your vaccines secure, preventing unauthorised access

The fan-forced cooling system ensures even distribution of cool air throughout the unit, maintaining consistent temperature levels

This fridge uses energy efficient R290 natural refrigerant, helping you save on energy costs while maintaining optimal temperature conditions for your vaccines

The internal LED light makes it easy to locate and identify your vaccines, even in dimly lit environments


Adjustable shelves make it a breeze to position and organise your vaccines

The BMS dry contact point allows for seamless integration with your monitoring system, making it easier to maintain precise control over your vaccines temperature

Rollers for smooth movement and adjustable legs for leveling make it a breeze to position this medical fridge exactly where you need it

This fridge is Pharmacy Guild-approved, meeting industry standards and regulations, giving you confidence in its quality and suitability for medical use



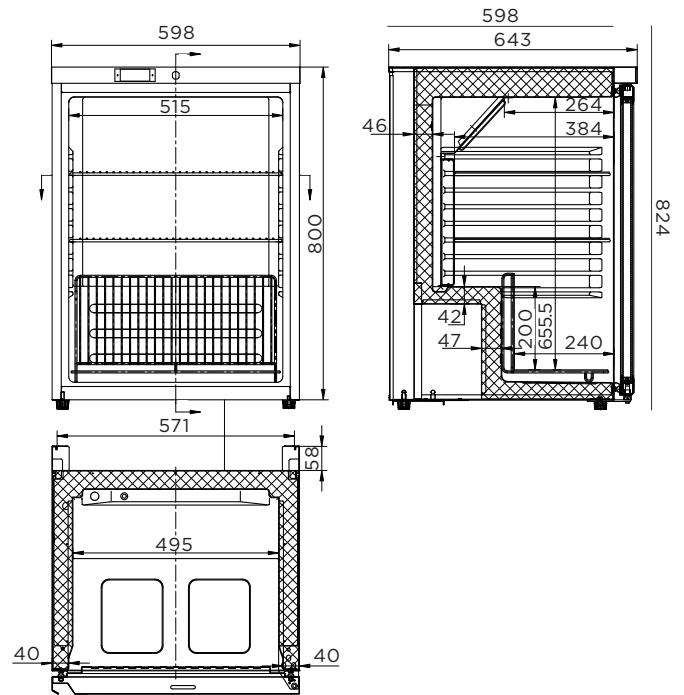

Medical / Vaccine Fridge

MED0140GD-NR

Part No. 3736257 Volume 145L Weight 40kg


- Temperature range: +2°C to +8°C
- Max ambient temp: 32°C
- 4 shelf tiers including base
- Min/max temperature recording
- Integrated lock
- Built-in audible and visual alarm system
- Digital temperature controller

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	491	650
Depth	595	510	650
Height	824	687	885

5 YEAR EXTRA CARE WARRANTY



Green Cooling™

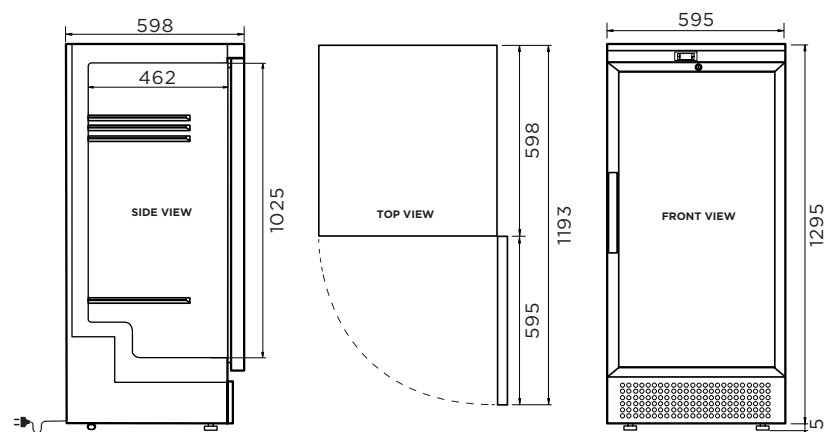

Medical / Vaccine Fridge

MED0220GD-NR

Part No. 3736217-NR Volume 215L Weight 65kg


- Temperature range: +2°C to +8°C
- Max ambient temp: 32°C
- 4 shelf tiers including base
- Min/max temperature recording
- Integrated lock
- Built-in audible and visual alarm system
- Digital temperature controller

	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	598	462	685
Height	1310	1555	1480

5 YEAR EXTRA CARE WARRANTY



Green Cooling™

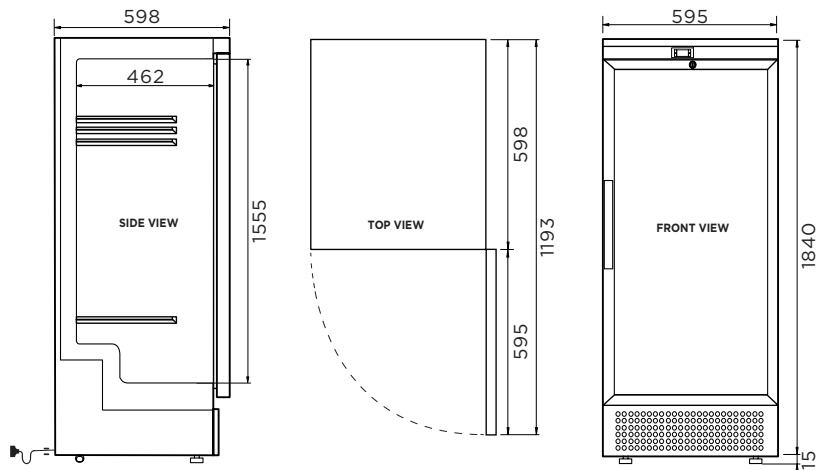

Medical / Vaccine Fridge

MED0374GD-NR

Part No.	Volume	Weight
3736218-NR	372L	81kg
	External (mm)	Internal (mm)
Width	595	505
Depth	598	462
Height	1840	1555
	Packaged (mm)	
	665	
	685	
	2010	

5 YEAR EXTRA CARE WARRANTY

- Temperature range: +2°C to +8°C
- Max ambient temp: 32°C
- 6 shelf tiers including base
- Min/max temperature recording
- Integrated lock
- Built-in audible and visual alarm system
- Digital temperature controller



Medical / Vaccine Fridge (Accessory)

MEDI-LOG 2

Part No. 350700051

	External (mm)
Width	65
Depth	20
Height	120

- Reliable data logger meeting Strive-for-Five guidelines and Department of Health recording interval requirements
- Time intervals between readings 1 minute to 99 minutes with 16,000 reading memory
- Available as an optional accessory
- Purchased separately



Model	MED0140GD-NR	MED0220GD-NR	MED0374GD-NR
Part Number	3736257	3736217-NR	3736218-NR
External Width (mm)*	595	595	595
External Depth (mm)*	595	598	598
External Height (mm)*	824	1310	1840
Volume	145L	215L	372L
Unit Weight	40kg	65kg	81kg
Adjustable Temp. Range	+2°C to +8°C	+2°C to +8°C	+2°C to +8°C
Max. Ambient Temp.	32°C	32°C	32°C
Climate Class	4M2	4M2	4M2
Energy Consumption	1.396kWh/24h	1.9kWh/24h	1.98kWh/24h
Refrigeration Capacity	100W	235W	350W
Rated Current	1.2A	1.18A	1.23A
Electrical Voltage	220-240V	220-240V	220-240V
Refrigerant	R600a	R600a	R600a
Frequency	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features			
Internal Light	LED	LED	LED
Number of Doors	1	1	1
Door Type	Glass	Glass	Glass
Door Style	Hinged	Hinged	Hinged
Door Lock	Yes	Yes	Yes
Door Swing Dimension	590mm	590mm	590mm
Total Depth of Door Open	1190mm	1190mm	1190mm
Self-Closing Door	Yes	Yes	Yes
Door Glass Type	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas
Shelf Type	Adjustable	Adjustable	Adjustable
Shelf Dimensions	500(w) x 355(d) mm	500(w) x 400(d) mm	500(w) x 400(d) mm
Min/Max Temp Recorder	Yes	Yes	Yes
Temp Alarm	Yes	Yes	Yes
Door Alarm	Yes	Yes	Yes
Audible & Visual Alarm	Yes	Yes	Yes
Defrost System	Automatic	Automatic	Automatic
Air Circulation	Fan Forced	Fan Forced	Fan Forced
Temp. Controller	Digital	Digital	Digital
Feet / Castors	No, feet + rollers	No, feet + rollers	No, feet + rollers
Colour	White	White	White
Warranty			
Parts & Labour (Years)	5	5	5
Bromic Extra Care	Yes	Yes	Yes

Trading Terms & Warranty

All Bromic products are manufactured to the highest quality standard and are supported by our Extra Care Service Warranty, including guarantees against any material or workmanship defects; guarantees that cannot be excluded under Australian Consumer Law.

IMAGES, SPECIFICATIONS

Due to the nature of the printing process, colours shown in this catalogue may differ from the actual colour of products. All images, drawings, graphics and design elements contained in this catalogue are subject to Australian and International copyright law. No part of this catalogue may be reproduced, copied or stored in part or whole without the prior written permission of Bromic Pty Ltd. Bromic reserves the right to change specifications and any other information contained in this catalogue with no recourse from customers.

WARRANTY

To ensure you are up to date with all Terms & Conditions associated with the purchase of a Bromic unit, please visit www.bromicrefrigeration.com.au/support/warranty/ and www.bromicrefrigeration.com.au/wp-content/uploads/2025/06/BR_01072025_Warranty_v1.8.pdf

ORDERING

Orders can be placed by phone, fax, online or email. Our catalogue includes Part Numbers and Model codes to ensure ease of use, with the customer in mind.

SPECIAL ORDER Special Order: 16 - 20 weeks delivery

DIMENSIONS

Unless otherwise indicated, all dimensions are external and given in millimetres.

COMPLIANCE

Products stocked by Bromic comply with all relevant regulatory requirements i.e. GEMS, AGA, electrical and safety requirements.

NOTES


NOTES

Peace of Mind starts with Bronic

Bronic Extra Care is more than just a standard warranty, it's the additional peace-of-mind you get when you purchase any Bronic refrigeration product.

The Bronic Extra Care gives you a one-stop support service from Bronic experts. Most issues may be resolved in a single call. Where additional support is needed, a technician can be onsite within 4 hours (response times are subject to assessment of service requirements and location, contact us for details). Our nationwide coverage means help is never too far away when you need it.

Best of all Bronic Extra Care is free, it's simply part of your Bronic purchase. Have your product serial number on hand and scan the QR code to book a warranty service request:

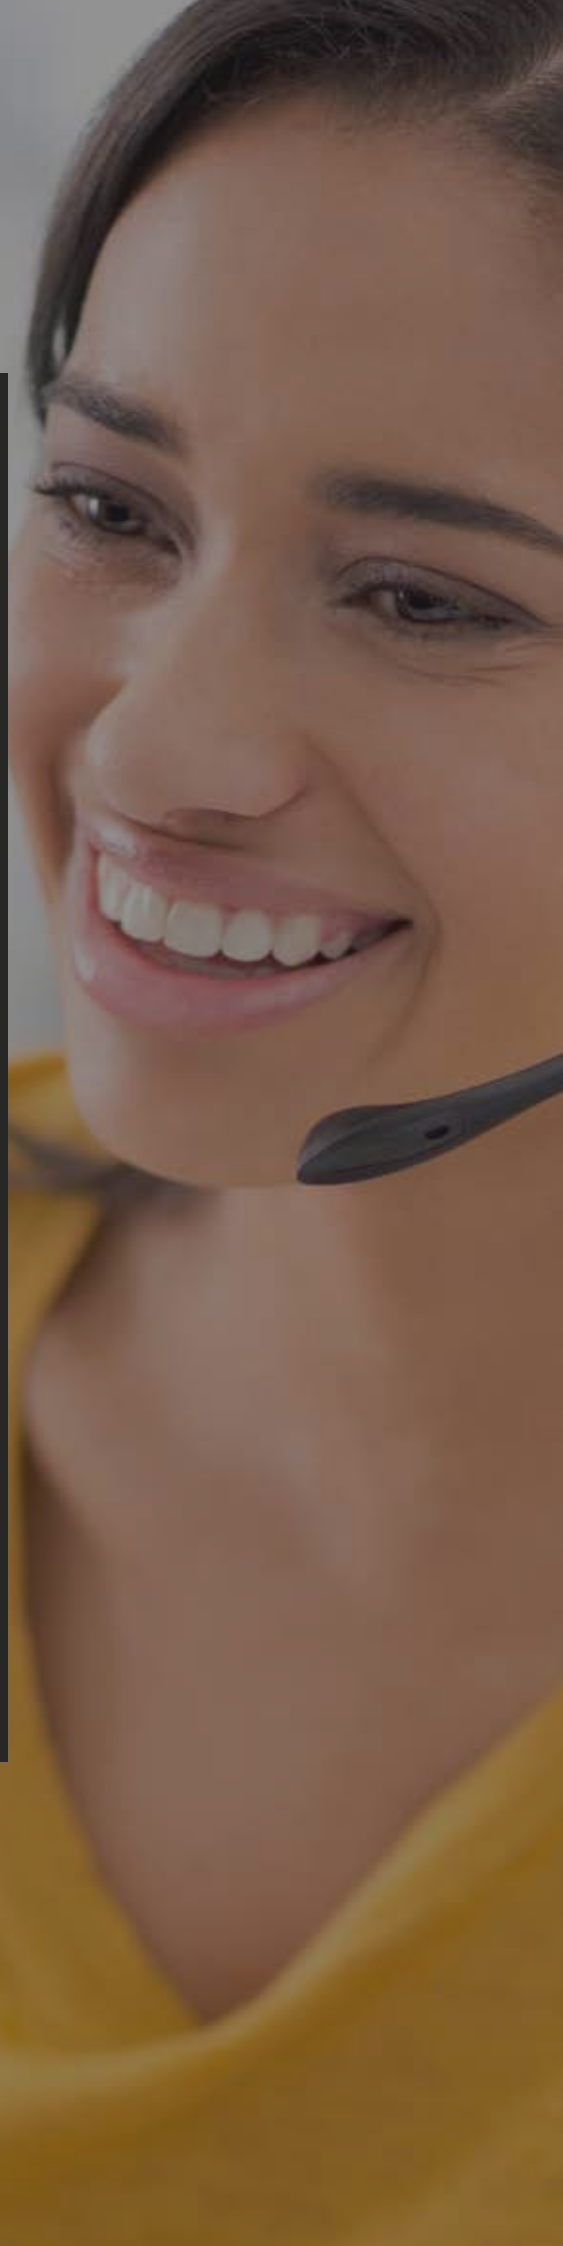

BROMIC REFRIGERATION

10 Phiney Place, Ingleburn (Sydney)
NSW 2565 Australia
T. 1300 276 642

For further product information
bromicrefrigeration.com.au

