


specifications

RF7.PPS.2.SD

ReFlex Series, 2 Door (Solid), Small Salad Preparation Fridge

Project: _____

Item No: _____

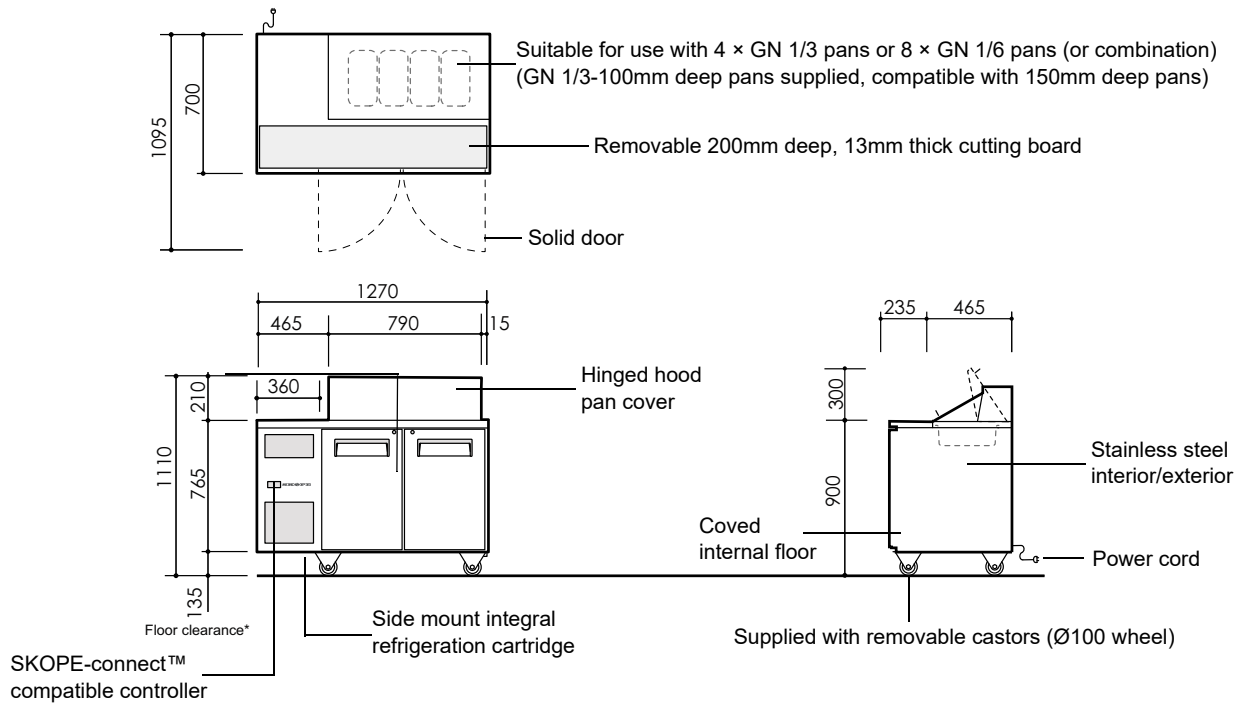

CABINET	
Doors	2 x self-closing, lockable, solid swing doors with stay-open position at over 90°, hinged LH, RH
Internal door opening	2 x door openings: 590mm high x 350mm wide
Shelves	4 x adjustable height shelves: 390mm wide x 510mm deep. Each shelf is held in place with 4 x shelf clips. Additional shelf clips are available on request.
Worktop	Removable, food grade, 13mm plastic cutting board
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temperature	40°C (lid(s) closed), or 30°C (lid(s) open)
Temperature range	1°C to 5°C (adjustable with SKOPE-connect™ -2°C to 15°C)
Total energy consumption	2.67 kWh/24h (@ 30°C/55% relative humidity)
Annual running cost	\$292 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5 (40°C/40% relative humidity)
Interior lighting	1 x 400mm, 4W LED light (door activated)
Power cord	2.7m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.0 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side-mounted, integral, removable refrigeration cartridge (part number ULQCNI-0029)
Refrigerant	R290 / 90g (natural refrigerant)
Nominal capacity	600 Watts
Heat rejection (Avg./peak)	110 Watts/120 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	1110mm	490mm
Width	1270mm	820mm
Depth	700mm	540mm
Floor area	0.89m ²	
Weight	139kg	
Gross volume	217L	

Height variation	
Supplied castors	1110mm
Supplied height adjustable legs	n.a.
No castors	975mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

PSS0666 Rev. 1.5 Nov. 2021

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

