specifications


Refrigeration

Project:

RF7.PPS.3.SD

ReFlex Series, 3 Door (Solid), Medium Salad Preparation Fridge

Item No:

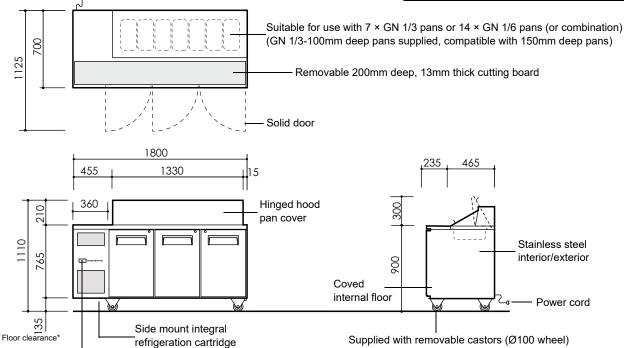

CABINET

3 × self-closing, lockable, solid swing doors with stay-open position at Doors

over 90°, hinged LH, LH, RH

Internal door opening 3 × door openings: 590mm high × 370mm wide

Shelves

SKOPE-connect™ compatible controller

> 6 × adjustable height shelves. Middle shelves: 475mm wide × 510mm deep.

Outer shelves: 415mm wide × 510mm deep. Each shelf is held in place with 4 × shelf clips. Additional shelf clips are

available on request.

Worktop Removable, food grade, 13mm plastic cutting board

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temperature 40°C (lid(s) closed), or 30°C (lid(s) open)

1°C to 5°C (adjustable with SKOPE-connect™ -2°C to 15°C) Temperature range

3.58 kWh/24h (@ 30°C/55% relative humidity) Total energy consumption

\$392 p.a. (@ \$0.30/kWh) Annual running cost

ELECTRICAL

Electrical safety climate class 5 (40°C/40% relative humidity)

Interior lighting 2 × 400mm, 4W LED lights (door activated)

2.7m, 10 Amp plug and lead Power cord

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.0 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Bluetooth® wireless technology Connectivity interface

Refrigeration system Side-mounted, integral, removable refrigeration cartridge

(part number ULQCNI-0029)

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 600 Watts

150 Watts/160 Watts Heat rejection (Avg./peak)

Email: skope@skope.com, Website: www.skope.com

No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

DIMENSIONS		
	External	Internal
Height	1110mm	490mm
Width	1800mm	1350mm
Depth	700mm	540mm
Floor area	1.26m ²	
Weight	162kg	
Gross volume	357L	

Height variation	
Supplied castors	1110mm
Supplied height adjustable legs	n.a.
No castors	975mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0667 Rev. 1.5 Nov. 2021



