

## Modular Bar Solutions



SBM-7-0600

\*Units 600mm to 1800mm have 4 legs



SBM-7-2100


\* Units 2100mm & 2400mm have 6 legs


SPECIFICATION					
Tops	- High quality 304 grade stainless steel. - 1.2mm gauge, no. 4 Finnish.				
Core	<ul><li>- 3mm zincalume.</li><li>- Top hat stiffening.</li><li>- Marine grade protective paint .</li></ul>				
Frames	- 30mm square stainless steel tube. - Satin polished, adjustable stainless disc feet.				
Servery	<ul><li>5mm stainless steel flatbar.</li><li>Welded to frame.</li><li>2 fixing holes.</li></ul>				

199	09		732 O/. 700	Α	12	32	235
006	7	•	484	-	150	30	200
<u></u>	161	87	724			80	100

## NOTE:

1. 700mm DEEP MODULE ELEVATION.

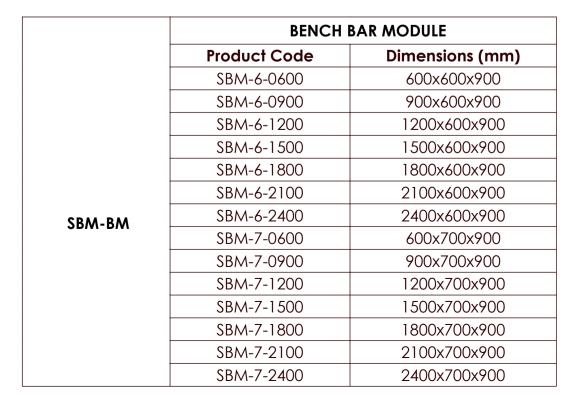

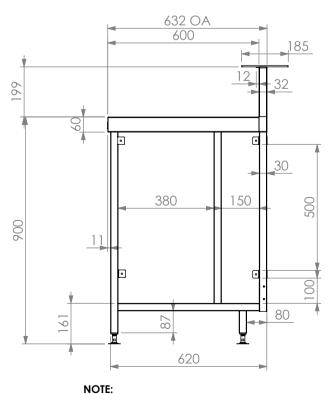

1. 600mm DEEP MODULE ELEVATION.

