

## Two Glass Swing Door Slimline

**Range:** BackBar

**SKOPE ID:** SL002

**Dimensions:** 1580mm (W) × 590mm (D) × 833mm (H)\*

**Capacity:** 290L

\* Height with castors is adjustable from 820 to 835.

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A glass door under-bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**



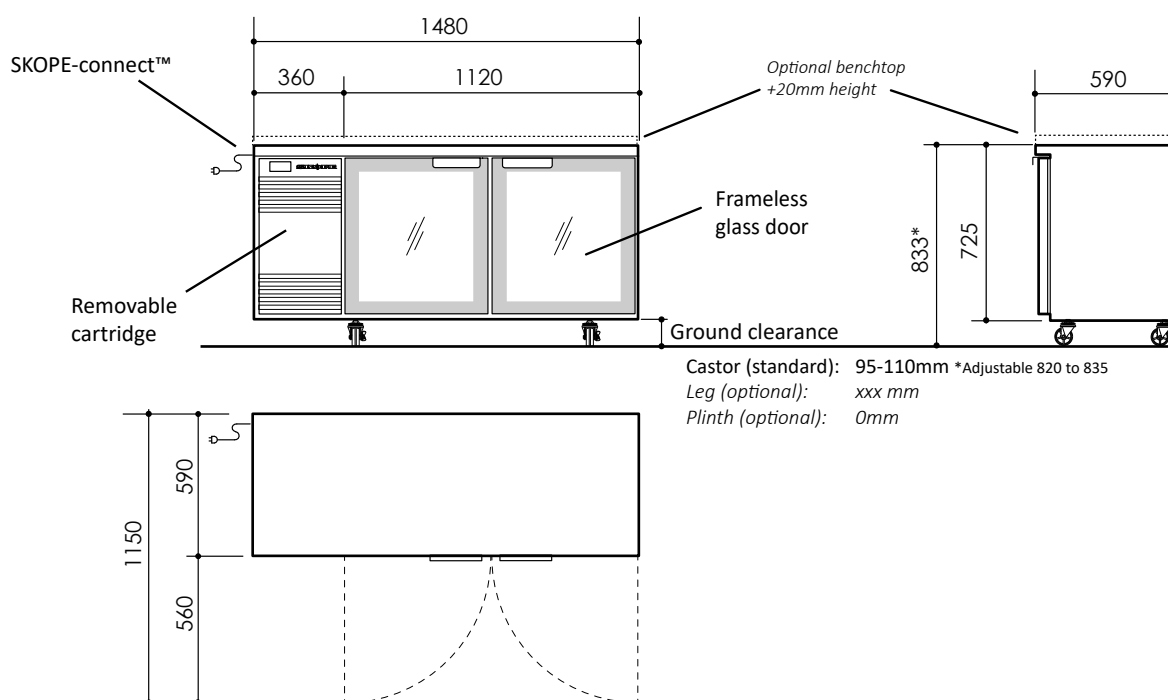
**Natural Refrigerant**



**GEMS**



**SKOPE-connect**

**Cabinet**

|            |                                                                                      |                                                                    |     |
|------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----|
| Type       | Slimline                                                                             |                                                                    |     |
| Finish     | Powdercoat galvanised steel or stainless steel                                       |                                                                    |     |
| Insulation | Type                                                                                 | PU foam                                                            |     |
|            | Thickness (mm)                                                                       | 50                                                                 |     |
|            | Blowing Agent                                                                        | Cyclo-iso Pentane (C5H10/C5H12)                                    |     |
| Doors      | Type                                                                                 | Glass swing door (double-glazed, low-e, argon-filled, tab-locking) |     |
|            | Opening Size                                                                         | Height (mm)                                                        | 538 |
|            |                                                                                      | Width (mm)                                                         | 511 |
| Shelving   | Four adjustable height, plastic-coated wire shelves<br>4 x inner shelf (547W x 440L) |                                                                    |     |
| Lighting*  | 1 x 16W, cool white (5500-6500K) LED strip on cabinet ceiling                        |                                                                    |     |

**Dimensions†**

|                | External           | Internal | Packed |
|----------------|--------------------|----------|--------|
| Width (mm)     | 1580               | 1120     | TBC    |
| Depth (mm)     | 590                | 475      | TBC    |
| Height (mm)    | 833 (std. castors) | 545      | TBC    |
|                | 725 (plinth mount) |          |        |
| Weight (kg)    | 166                |          | TBC    |
| Capacity (L)   | 290                |          |        |
| Footprint (m²) | 0.93               |          |        |

**Ventilation (mm)**

|     |              |       |              |      |              |
|-----|--------------|-------|--------------|------|--------------|
| Top | Not required | Sides | Not required | Rear | Not required |
|-----|--------------|-------|--------------|------|--------------|

**Product Loading**

|         |           |     |              |     |
|---------|-----------|-----|--------------|-----|
| Facing  | 330ml can | 32  | 600ml bottle | 28  |
| Loading | 330ml can | 192 | 600ml bottle | 168 |

\*Accessible via the free SKOPE-connect™ app.

†Allow for dimensional tolerances when installing the cabinet(s).

**Performance**

|                                 |                                   |     |
|---------------------------------|-----------------------------------|-----|
| Product Temperature Range (°C)  | 1 to 4 (adjustable* from 0 to 15) |     |
| Operating Temperature           | 32°C/65% relative humidity        |     |
| Max. Operating Temperature (°C) | 40                                |     |
| Sound Level (dB(A))             | Standard                          | <66 |
|                                 | Hush Mode*                        | <62 |

**Greenhouse and Energy Minimum Standards (GEMS)**

|                             |                                |
|-----------------------------|--------------------------------|
| Star Rating                 | 9                              |
| Product Temperature Class   | M1 (-1 to 5°C)                 |
| Operating Temperature Class | 3 (25°C/65% relative humidity) |
| Total Energy Consumption    | 1.87 kWh/24h                   |
| Annual Running Costs        | \$205 (@ \$0.30/kWh)           |

**Electrical**

|                  |                                                |
|------------------|------------------------------------------------|
| Supply           | 220-240 volts a.c., 50 Hz, single phase supply |
| Cord             | 1.9m power cord with 3-pin, 10 amp plug        |
| Current draw (A) | 2.6                                            |

**Refrigeration**

|                       |                                         |    |      |     |
|-----------------------|-----------------------------------------|----|------|-----|
| Controller            | SCS Connect (SKOPE-connect™ compatible) |    |      |     |
| System Type           | Removable cartridge                     |    |      |     |
| Cartridge Weight (kg) | 24                                      |    |      |     |
| Refrigerant/Charge    | R290/81g                                |    |      |     |
| Nominal Capacity (W)  | 650                                     |    |      |     |
| Heat Rejection (W)    | Average                                 | 80 | Peak | 100 |
| Remote Duty           | n.a.                                    |    |      |     |
| Defrost Type          | Off-cycle                               |    |      |     |
| Drainage              | No plumbing required                    |    |      |     |



SL.2.GSW  
on the SKOPE website