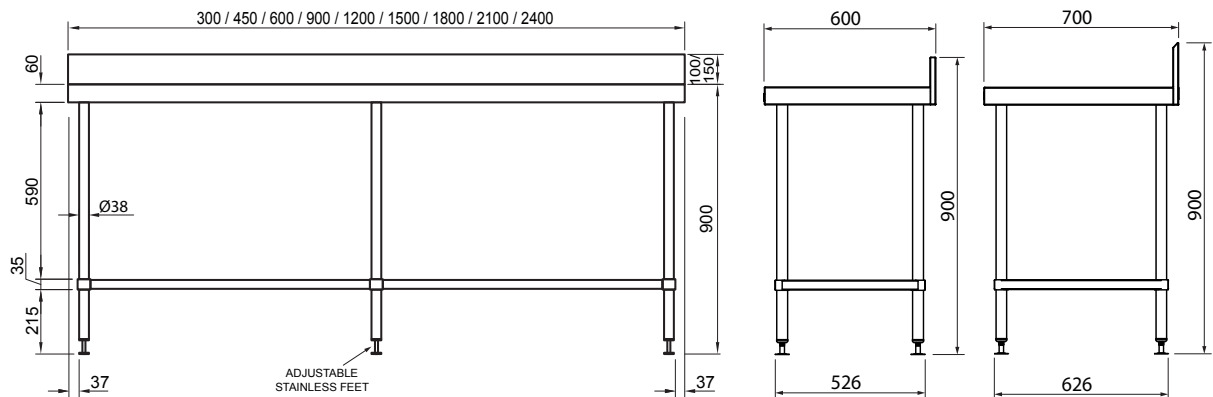


Product Information:

- Work bench with rear splashback, available in 600mm or 700mm depth
- 1.2mm thick 304 stainless steel top
- 3mm zincalume steel reinforced backing to work top
- 38mm diameter round stainless steel tube legs, 1.2mm thick
- Adjustable stainless steel disk feet fitted as standard
- 1.2mm thick stainless steel under-shelf with top hat stiffening
- 100mm (600 series) or 150mm splashback with beveled edge (700 series)
- Vermin proofing included behind upstand with pre-drilled holes for fixing bench to rear wall
- 1800, 2100 & 2400mm length units supplied with 6 legs
- Supplied flat packed ready for assembly

**General Drawing:**

FRONT ELEVATION

SIDE ELEVATION

Specifications

Product Code	W x D x H (mm)	Unit Weight (Kg)	Load Capacity (Kg)	Legs
SS02.0300	300 x 600 x 900	17	60	4 legs
SS02.0450	450 x 600 x 900	21	130	4 legs
SS02.0600	600 x 600 x 900	25	140	4 legs
SS02.0900	900 x 600 x 900	33	180	4 legs
SS02.1200	1200 x 600 x 900	42	320	4 legs
SS02.1500	1500 x 600 x 900	51	360	4 legs
SS02.1800	1800 x 600 x 900	63	400	6 legs
SS02.2100	2100 x 600 x 900	71	440	6 legs
SS02.2400	2400 x 600 x 900	80	480	6 legs
SS02.7.0300	300 x 700 x 900	20	130	4 legs
SS02.7.0450	450 x 700 x 900	25	140	4 legs
SS02.7.0600	600 x 700 x 900	31	150	4 legs
SS02.7.0900	900 x 700 x 900	38	180	4 legs
SS02.7.1200	1200 x 700 x 900	52	320	4 legs
SS02.7.1500	1500 x 700 x 900	61	360	4 legs
SS02.7.1800	1800 x 700 x 900	76	400	6 legs
SS02.7.2100	2100 x 700 x 900	88	440	6 legs
SS02.7.2400	2400 x 700 x 900	98	480	6 legs

Due to continuous product research and development,
the information contained herein is subject to change without notice.

Revision: B - 23/08/2024 - 04

www.stoddart.com.au

