specifications




RF7.UBR.2.GD

ReFlex Series, 2 Door (Glass), Underbench Fridge

Project:

Item No:

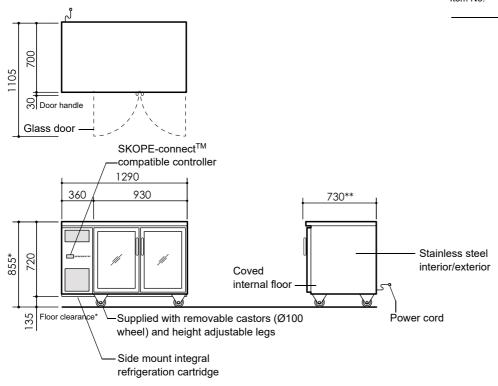

CABINET

Model ID RF7.UBR.2.GD

SKOPE ID RB2R

Doors 2 × self-closing, lockable, double glazed, double Low-E, glass swing

doors. LH, RH

Internal door opening 2 × door openings: 560mm high × 355mm wide

Shelves 4 × adjustable height shelves: 395mm wide × 510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect 0°C to 15°C)

ELECTRICAL

Climate class 5 (40°C/40% RH)
Interior lighting 1 × 400mm, 4W LED light

Power cord Supplied with 2.6m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

ULKCNI-0027)

Refrigerant R290 / 80g (natural refrigerant)

Nominal capacity 450 Watts

Heat rejection (Avg/peak) 105 Watts/115 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	855mm*	570mm	
Vidth	1290mm	820mm	

Depth 730mm**
Floor area 0.9m²
Weight 116kg
Internal volume 248 litres

* With supplied castors fitted. See height variation below

** Includes 30mm door handle

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0597 Rev. 1.0 Dec. 201

530mm



