specifications


SIF Refrigeration

RF7.UPF.1.SD

ReFlex Series, 1 Door (Solid), Upright Freezer

Project:

Item No:

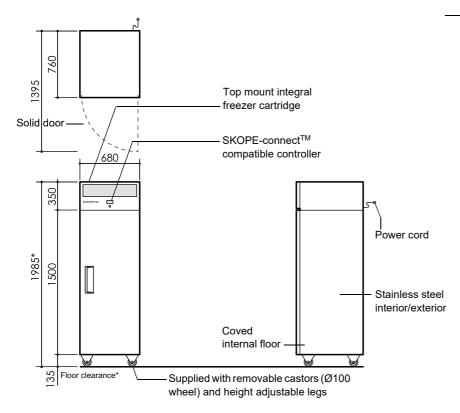

CABINET

Model ID RF7.UPF.1.SD RF7UPF1-SCTP-SD

Doors 1 × self-closing, lockable, solid swing door. RH
Internal door opening 1 × door openings: 1375mm high × 555mm wide

Shelves 5 × adjustable height shelves: 540mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting

Power cord

Power supply

Current draw

1 × 1200mm, 12W LED light (door activated)

Supplied with 2.3m, 10 Amp plug and lead

220-240 Volts a.c. 50 Hz, single phase supply

4.0 Amps (includes unit 2.0 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number UTKDNI-

0019)

Refrigerant R290 / 94g (natural refrigerant)

Nominal capacity 550 Watts

Heat rejection (Avg/peak) 325 Watts/385 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

`	IN	$I \subset I$	NIC	NS	
J	HΝ	,,,	1 V.J	 כיעו	

External Internal Height 1985mm* 1395mm Width 680mm 560mm Depth 760mm 600mm $0.52m^{2}$ Floor area Weight 122kg Internal volume 470 litres

* With supplied castors fitted. See height variation below

Height variation				
Supplied castors	1985mm			
Supplied height adjustable legs	1995-2035mm			
No castors or legs	1850mm			

Dimensional tolerances						
Before installing this cabinet allow the following dimensional tolerances:						
Linear dimensions	Overall cabinet dimensions					
Less than 1 metre	±5mm					
More than 1 metre	-5mm to +10mm					
	Length of multiple cabinets					
	At each joint	At each end wall				
Less than 1 metre	±5mm	+15mm				
More than 1 metre	-5mm to +10mm	+15mm				

	/entilation requirements		
	Тор	300mm	
	Sides	Not required	
	Back	Not required	
	Bottom	Not required	

PSS0590 Rev. 1.3 Aug. 2019



