

XPC

PASSTHROUGH DISHWASHER
C/W HEAT RECOVERY UNIT



STANDARD FEATURES

- Integrated Heat Recovery Unit
- No external extraction canopy required*
- Recycles energy from steam to heat incoming water
- Compatible with 595mm to 640mm benchgaps
- 1, 2 and 3min cycles - up to 1,080 plates per hour
- Compatible with 500mm racks
- Washtech hybrid controls
- Hands-free drainage system with drain pump
- 1.0HP wash pump
- Dual chemical pumps
- Heavy duty stainless steel wash manifold and scrap trays
- Stainless steel wash and drain filter

- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)
- 1x plumbing connection kit (water and chemical hoses)

SPECIFICATIONS

A - Cold Water

Temperature	<25°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------


C - Electrical	V	Hz	A/ph	Max kW
Three phase	400-415	50	15	9.00**

*Subject to adequate general ventilation. Full details and certification from SEED available on request.

**Single phase options possible although requires modification by a Technician and will increase recovery time between cycles. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH®

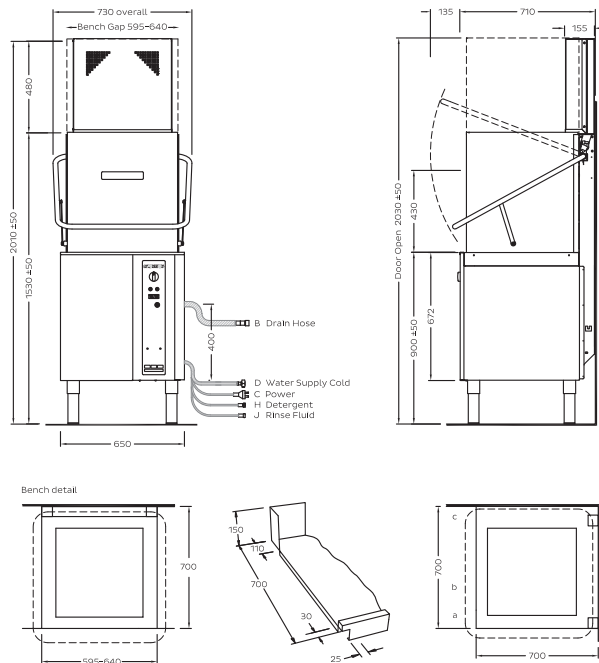

Dimensions

Width (mm)	730
Depth (mm)	710
Height (mm)	2010
Weight (kg)	118
Volume (m3)	

Machine

Width (mm)	730
Depth (mm)	710
Height (mm)	2010
Weight (kg)	118
Volume (m3)	

Packed

Width (mm)	760
Depth (mm)	820
Height (mm)	2015
Weight (kg)	142
Volume (m3)	1.10

Water Quality

pH	7
TDS (ppm)	1
Hardness	
Cl-	100
SO4	400
Fe	0.1
Cl2	0.1

Min

pH	7
TDS (ppm)	1

Max

pH	8
TDS (ppm)	135
Hardness	100
Cl-	100
SO4	400
Fe	0.1
Cl2	0.1

Corner installation: machine must face left for access to controls; allow 300mm front clearance for service access; and splashback return <150mm.

Inline installation: front panels can be adjusted to 605mm leaving upper 80mm sill only at 650mm; for sites requiring full cabinet <650mm, order WXP0046.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech XPC Series-4 / WXP0040 / Dec-25

an Ali Group Company



the spirit of excellence