

WASHTECH®

PROFESSIONAL WASH SYSTEMS

UL

Fully Insulated Premium Undercounter Glasswasher / Dishwasher - 500mm Rack

W 600mm x D 635mm x H 845mm

The UL is fitted with a break tank with rinse booster pump, with an option to convert to 3 phase electrical configuration for faster recovery on cold water supply. The thermostop function allows the machine to wash while rinse water is re-heating.

Standard Features

- Thermal & acoustic insulation with smooth action drop down door
- 2.6 litres per cycle hot water consumption
- Up to 1000 glasses per hour / 800 plates per hour
- Assured final rinse - 316 grade stainless steel rinse tank and rinse booster
- Reverse osmosis compatible for spot free results
- Electronic controls with enhanced functionality
- Multi-cycle options - 1,2 and 3 minute cycles with manual cycle mode, Ecopower, Soft Start and Self Cleaning cycle
- Service diagnostics for error recognition
- Enhanced filtration and active waste removal
- Dual chemical injectors
- Drain pump
- Independent stainless steel upper and lower wash & rinse arms with removable cleaning caps
- Recirculates wash water at nominal 200 litres per minute
- 2.5kW wash & 3/6kW rinse heating (3 phase required for 6kW)
- 350mm door clearance
- Suits 500mm international standard racks
- QuickConnect
 - Water supply hose
 - Dual chemical injector lines
 - Drain pump outlet hose
 - 15 amp plugset
- Includes adjustable feet & rear rollers for easy removal when cleaning
- No commissioning required
- Watermark certified
- On site 3 phase conversion if required

Includes:

- 1 x 600 70028 - 500mm dish rack
- 1 x 600 70029 - 500mm cup rack
- 1 x C660503 - cutlery container



The unit shall be a Washtech undercounter glasswasher and dishwasher with Watermark certification. The dishwasher shall be fully insulated with double panels to all sides, and have upper mounted electronic controls and keypad with one, two and three minute complete operating cycles. The unit shall be supplied with 500mm cup and dishracks and the wash compartment shall be 350mm tall to accept large plates. The unit shall be fitted with rotating upper and lower all stainless steel independent wash and rinse arms, all with removable end plugs for cleaning. Detergent and rinse fluid injectors, a rinse booster pump and a drain pump shall be fitted, and hot water consumption shall be 2.6 litres per operating cycle. The unit shall require 15amp single phase supply, and be suitable also for 15 amp 3 phase 5 wire supply if required. The unit shall be supplied in 100% recyclable shipping packaging.




WASHTECH®

PROFESSIONAL WASH SYSTEMS

UL

Fully Insulated Premium Undercounter Glasswasher / Dishwasher - 500mm Rack

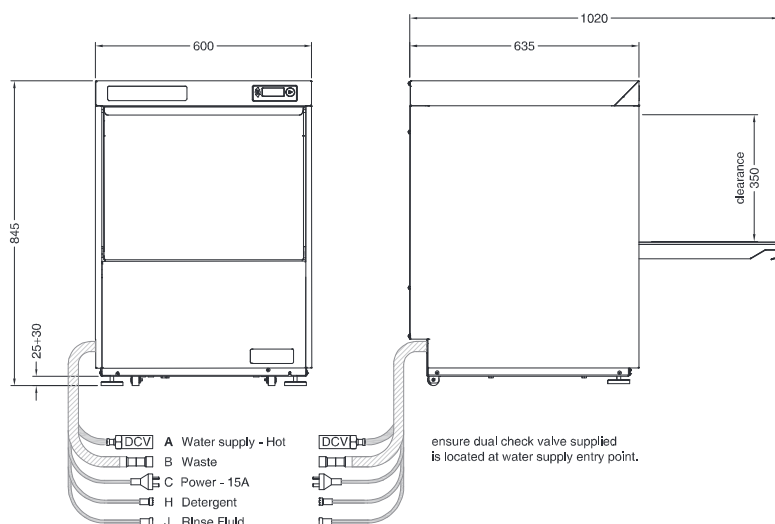

MOFFAT®

Australia
www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

A Hot Water

temperature
connection

65°C recommended
3/4" male;
hose supplied
100-350kPa
15 litres per min
potable & soft

pressure
flow
quality

B Waste

connection

hose supplied
for 38mm open
standpipe 750 high
or connection to
sink trap

C Electrical

single phase 240V 50Hz 15 amp plugset supplied
OR 3 phase 415V 50Hz 15 amp per phase

Dimensions

Width 600mm
Depth 635mm
Height 845mm
Weight 74kg

Packed Dimensions

Width 720mm
Depth 690mm
Height 970mm
Weight 92kg
Cubicmetres 0.48m³

Refer operator manual for complete
installation instructions

