



UL / UL-B

Fully Insulated Premium Undercounter Dishwasher/Glasswasher – 500mm Rack

W 600mm x D 635mm x H 845mm

The Washtech Premium Range represents the most technologically advanced dishwashers in the Washtech line up. They are built to deliver the best wash results alongside the latest enhancements such as advanced electronic controllers, soft close doors, advanced filtration full thermal, and acoustic insulation to provide an optimal operating environment around the machine. Our assured rinse system ensures consistently great rinsing every cycle, while the soft start functionality protects your glassware and crockery.

The Washtech UL is the direct upgrade of the ever popular UD. Perfect for bars, cafes and other locations where high performance is required. Available now in a black stainless outer panel version.

Standard Features

- · Quikstart 1, 2 and 3 minute cycles
- Washes up to 1,080 plates / 1,500 glasses per hour
- · QuikConnect Installation with everything you need including:
 - · Water supply hose
 - · Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - 15 amp plugset
 - · No commissioning required
- Reliable results through robust stainless steel wash and rinse arms with precision stainless jets
- Durable stainless steel construction
- · Moffat's Comprehensive 5-2-1 Warranty
- Low hot water consumption of 2.4 litres per cycle
- Assured final rinse ensures the correct temperature and pressures every time through 316 stainless break tank and rinse pump
- Soft start ensures great results through progressively pressurising the cycle to provide a consistent and even clean every time
- EcoPower reduces temperatures and energy consumption when machine is not being used
- Full thermal and acoustic insulation (via dual stainless steel panelling) to provide a cooler and quieter operating environment
- Enhanced filtration system that allows you to drain straight from the keypad, with no need to put your hand in the machine
- Soft close door enables smoother and quieter operation of the machine

Includes:

- 1x60070028 500mm dish rack
- 1x60070029 500mm cup rack
- 1x C660503 cutlery container

Optional extras include*:

- · Black stainless steel outer panels
- * Manufactured to order and subject to extended delivery time.






















UL / UL-B

Fully Insulated Premium Undercounter Dishwaser/Glasswasher – 500mm Rack

W 600mm x D 635mm x H 845mm

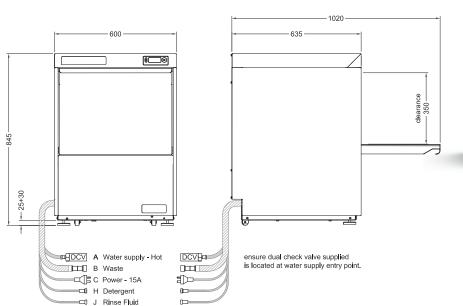





moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 bgarcia@moffat.com.au

ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Moffat / 1116

A Hot Water

Temperature 65°C
Connection 3/4" male hose supplied
Pressure 200-350kPa
Flow 15 litres per min
Quality Potable & soft
Backflow Prevention Dual Check Valve (DCV)
Consumption 2.4 litres per cycle

B Waste

Connection Hose supplied for 38mm open standpipe 750 high

or connection to sink trap

C Electrical

Single phase 240V 50Hz 15A plugset supplied
Three phase 415V 50Hz 15A/

Maximum Power Consumption

Single phase 3.4kW Three phase 9.0kW **Heating**

Wash 2.5kW

Rinse 3.0kW or 6.0kW

Dimensions

Width 600mm Depth 635mm Height 845mm Weight 74kg

Packed Dimensions

Width 720mm
Depth 690mm
Height 970mm
Weight 92kg
Cubicmetres 0.48m³

Water Quality Requirements

рΗ Hardness ppm Min 20 Max 100 8 SO₄ Fe Mn Cu CL, Max mg/l 100 400 0.1 0.05 0.5

Refer operator manual for installation instructions

an Ali Group Company

