

AL8x

PASSTHROUGH WAREWASHER

WASHTECH®

STANDARD FEATURES

60, 180 and 300 second cycles

Washtech Hybrid controls

Oversized wash chamber W700 x D540 x H650

2.0HP wash pump

Dual chemical pumps

Assured rinse including rinse pump

Hands-free drainage system with sump and drain pump

Two-stage stainless steel wash and drain filtration

Heavy-duty stainless-steel construction and manifold

Independent stainless-steel wash and rinse arms

1x 600 x 600mm dish rack (600 70042)


1x 600x 500mm base rack (600 70043)

1x cutlery container (C660508)

1x cutlery basket (C660503)

1x cup cover (K0452)

1x plumbing connection kit (water and chemical hoses)

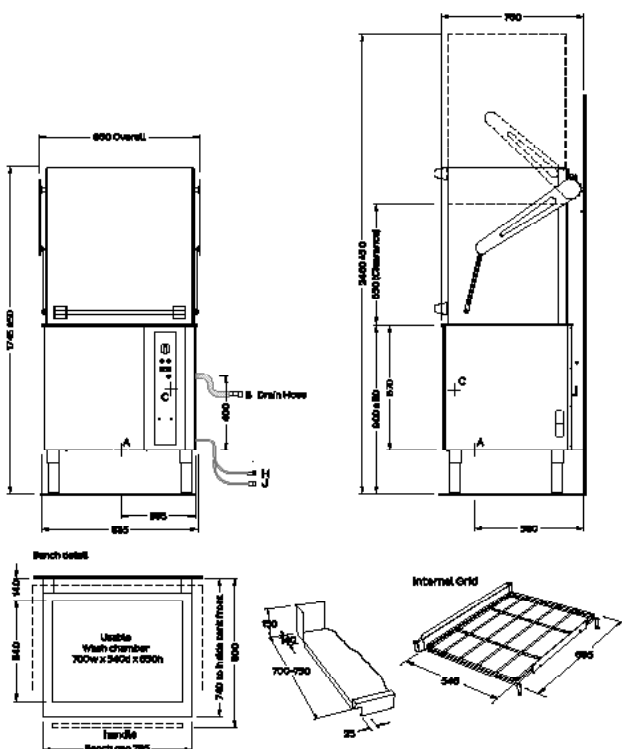

SPECIFICATIONS

A - Hot Water

A - Hot Water	Temperature 65°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa*
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.6L per cycle

B - Drainage

Drain pump flexi-hose 25mm

C - Electrical

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400 - 415	50	15	10.50
Three phase	400 - 415	50	25	18.00**

Dimensions

Dimensions	Machine	Packed
Width (mm)	860	1000
Depth (mm)	760	910
Height (mm)	1745	1650
Weight (kg)	155	180
Volume (m3)		1.5

Water Quality

Water Quality	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

*Suitable for connection to low flow water supplies.

**Higher power mode removes wash/rinse heating interlock and is recommended for sites with cold water supply.

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited

© Copyright Washtech Limited / Washtech AL8x Series-5 / WAL8x0040 / Feb-25

an Ali Group Company



the spirit of excellence