

CD200

240 rack per hour Conveyor Dishwasher
W 2700mm x D 765mm x H 1455mm

The Washtech CD200 is designed to efficiently optimise washroom performance, now with increased dishwashing capacity of 240 racks per hour and reduced water consumption of 180 litres per hour, alongside a broad range of customisable system accessories.

Since 1981 Washtech dishwashers have been constructed in New Zealand from heavy-duty stainless steel, and are engineered specifically for the unique Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your CD200 will not let you down.

Standard Features:

- Capacity of up to **240 racks per hour** (4,320 plate equivalents)
- Water consumption of just **180 litres per hour**
- Heavy duty stainless steel construction and wash manifold
- Full width, easily removable stainless steel wash filter trays for easy cleaning
- Removable upper and lower heavy duty stainless steel wash arm cassettes
- Powerful drive with safety clutch allows the machine to wash heavy items with ease
- Autostart minimises operating costs by only activating pumps and drive when a rack is present
- Rinse economiser only draws fresh water when racks are in the rinse zone
- 600mm pre-wash module
- 1200mm wash module with pre-rinse zone
- 600mm EcoRinse module with recirculating and final rinse stages
- Easily maintained electromechanical controls
- Will wash items up to 400mm high, and taller with suitable operator procedures
- In-house CAD design service for every site layout
- Watermark approved backflow prevention
- Comprehensive Moffat 5-2-1 warranty

Includes:

- 2 x 500mm dish rack (600 70028)
- 2 x 500mm cup rack (600 70029)
- 2 x cutlery container (C660503)
- 1 x cutlery basket (C660508)

Optional Accessories include:

- Dryer modules
- Straight and curved roller tables
- Pre-rinse troughs
- Setdown benches
- Custom scrap/sort stations
- Sideload tables
- Inlet and outlet corner pawl drives
- Heavy duty roller table limit switch



CD200



moffat.com.au
washtech.com.au

Moffat Pty Limited

VIC/TAS/SA

70 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Fax 03-518 3833
vsales@moffat.com.au

NSW

Telephone 02-8833 4111
nswsales@moffat.com.au

QLD


Telephone 07-3630 8600
qldsales@moffat.com.au

WA

Telephone 08-9202 6820
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Version: WCD200XXXX 2005

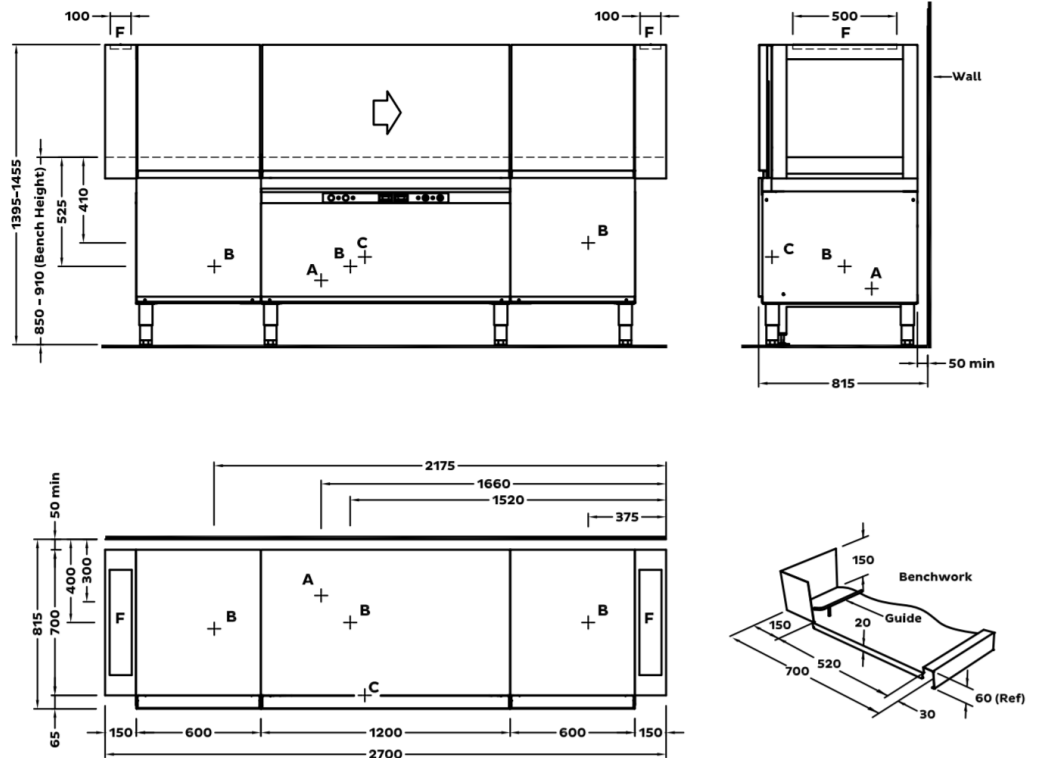

A - Hot Water

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention DCV
Consumption 180 litres per hour*

B - Waste

Connection 1.5" BSP male
Line 2.0" / 50mm minimum

C - Electrical

V	Hz	A/phase	Max kW
Three Phase 415	50	32	21.00

F - Extraction

Typical minimum: 250L/sec
Requirements will vary by site, consult with a ventilation engineer

Isolating switch must be within 1m of, and not directly behind the machine.

Dimensions

Machine	Packed
Width (mm)	2700
Depth (mm)	765
Height (mm)	1455
Weight (kg)	340
Volume (m ³)	5.57

Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

* Water consumption rates may vary based on site conditions.

Refer to operator manual for installation instructions.



an Ali Group Company

