

XG

High Efficiency Economy Undercounter Glasswasher - 365mm Rack

W 445mm x D 510mm x H 775mm

Compact Smart Watermark Certified Recirculating Glasswasher.

Standard Features

- Low hot water consumption 1.5 litres per cycle
- Up to 1000 glasses per hour
- Quickstart fast one minute cycle
- Classic electromechanical controls
- Dual chemical injectors
- Drain pump
- Lower rotating wash & rinse arm with precision moulded jets
- Recirculates wash water at nominal 100 litres per minute
- 2.5kW wash and 3kW rinse hearing
- 290mm door clearance
- Accepts all standard 365mm x 435mm glass racks
- Magnetic door safety switch
- Stainless steel construction
- Very compact - only 440mm wide
- Easy clean interior
- Easy install
 - Water supply hose
 - Dual chemical injector lines
 - Drain pump outlet hose
 - 15 amp plugset
- No commissioning required
- Watermark and Smart Watermark certified

Includes:

- 1 x K0401 - 365mm glass rack




The unit shall be a Washtech glasswasher with Watermark and SmartWatermark certification. The unit shall have a one minute complete operating cycle and shall accept 365mm x 435mm glass racks with 290mm door clearance for tall glasses. The unit shall be fitted with a wash system which recirculates wash water at a nominal rate of 100 litres per minute and water consumption of 1.5 litres per cycle. A detergent injector, a rinse fluid injector and a drain pump shall all be fitted and the unit shall be supplied in 100% recyclable shipping packaging. Electrical supply to be 15 amp single phase.



XG

High Efficiency Economy Undercounter Glasswasher - 365mm Rack

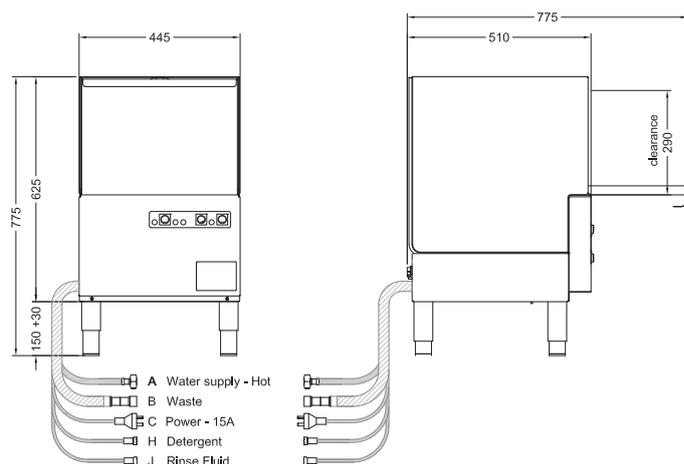

Australia
www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

A Hot Water		
temperature	65°C	
connection	3/4	
pressure	200-350kPa	
flow	20 litres per min	
quality	potable & soft	
B Waste		
connection	1.5 BSP	
hose supplied		
C Electrical		
Single phase 240V 50Hz	15 amp	
	plugset supplied	

Dimensions	
Width	445mm
Depth	510mm
Height	775mm
Weight	29kg

Packed Dimensions	
Width	520mm
Depth	590mm
Height	780mm
Weight	42kg
Cubicmetres	0.25m ³

Refer operator manual for complete installation instructions

