
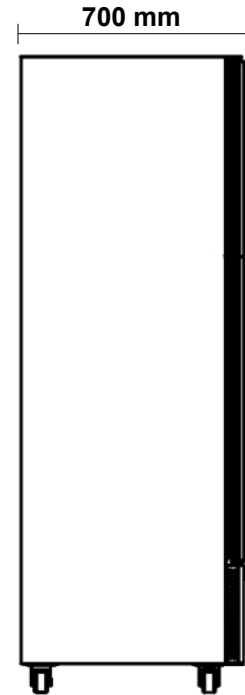


# SPECIFICATIONS

## CCB1000-WHT/WHT

### Bottom Mount Merchandiser - 2 Door

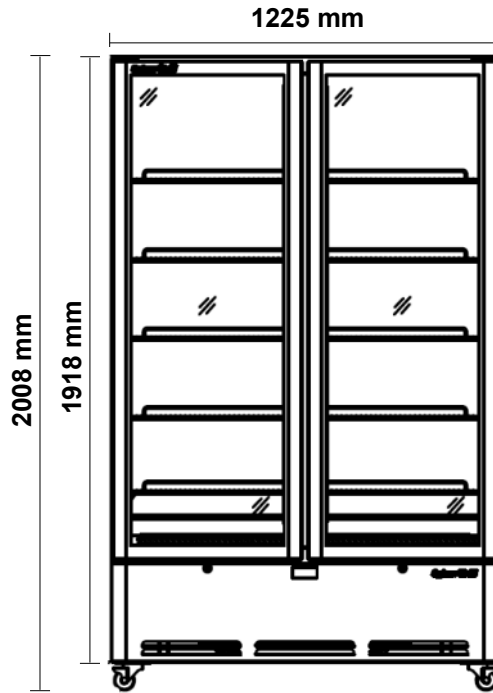

#### SPECIFICATIONS

<b>Refrigeration system</b>	Electronic controlled, self-contained, bottom mounted, refrigeration unit	
<b>Refrigerant</b>	R134a / 370g	
<b>Cabinet Classes</b>	3M1, 4M1, 5M1	
<b>Nominal capacity</b>	590 Watts @ -5°C SST	
<b>Energy consumption</b>	4.403 kWh/24h (Tested to ISO23953)	
<b>Cabinet internal volume</b>	1000 litres	
<b>Insulation</b>	50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation	
<b>Cabinet temperature range</b>	+1°C to +4°C up to 43°C ambient	
<b>Drainage</b>	Waste heat vaporiser located in service compartment (no plumbing required)	
<b>Electrical</b>	240 Volts a.c. 50 Hz, 2.8 Amps	
<b>Doors</b>	2 x Self-closing, LowE, double glazed (safety glass) swing door	
<b>Lighting</b>	Full length internal LED light (automatic & with manual switch)	
<b>Shelves</b>	10 x PVC coated wire shelves (supplied with 2 x SS drip trays)	
<b>Refrigeration</b>	Removable 'CyberZone' refrigeration cassette	
<b>Weight</b>	210kg	
<b>Lightbox</b>	Optional replacement LED top-mounted lightbox (200mm)	
<b>Cabinet dimensions</b>	<b>External</b>	<b>Internal</b>
<b>Width</b>	1225mm	1125mm
<b>Depth</b>	700mm	610mm
<b>Height</b>	1918mm*	1445mm

#### OPTIONS

- Lightbox (200mm)
- Solid Doors
- Legs (Std on castors)
- Extra Shelves
- SS exterior/interior
- Black exterior/interior
- Available in R290 Hydrocarbon refrigerant

\* Height excludes castors or legs