



Classica GT 2 Groups Volumetric.

Please supply the following before installation day

Water Requirements -

Dedicated stop Valve/tap with inline pressure reduction valve of 350kpa with at the end a 3/8(10mm) fitting. Please place this within 1 metre of the machine. Cold Water
Water filter required, unless supplied with installation.



Power Requirements -

15 Amp single phase within 1 metre of the machine usually below bench.

NB: Preferred to be operated by plug please supply 15 Amp single phase 3 pin switched socket.



Drain Requirements -

Open gravity drain of minimum 5cm in diameter within 1 metre of the machine.

Access required to the drain, to enable blockages to be cleared. We advise a trap in line to be installed by the plumber so to avoid bad odours from escaping.



Machine Dimensions -

Height: 595 mm

Width: 680 mm

Depth: 590 mm

Weight: 70 kg

Power: 3500W

Note: Please allow some space for ventilation around machine!



For Further information please contact:

VCM Vending Coffee Machines


Unit 11 / 93 Hector Street West

Osborne Park WA 6017

Ph: 08 9 244 1900

Fax: 08 9 244 1911

service@vcmpertth.com.au

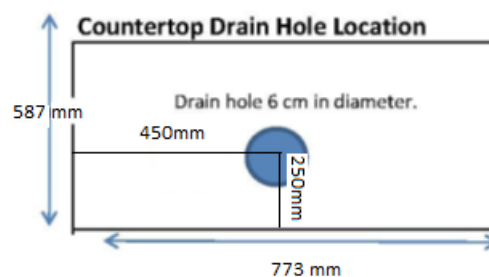

Please note that these requirements must be in place when the installer arrives.

Failure to have the site ready will result in additional service charges and may cause installation delays.