SOLID STAINLESS STEEL DOOR - HYGROMETRY




TOURNUS EQUIPEMENT

Product Advantages:

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with pressdrawn sliders and base.
- Door with removable seal opens 270°.
- · Carrying handles on sides and back.
- Wheels 125 mm with polyamide cover,
 2 with brakes.
- · Circumferential bumpers.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.



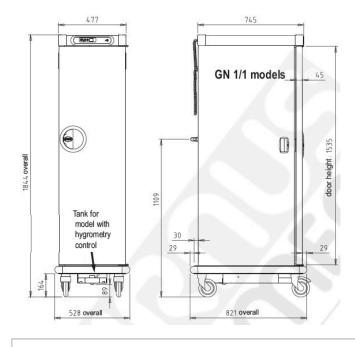

Hygrometry Control:

- Hygrometry controlled by 5 pre-set cycles in the elec. control thermostat.
- Removable rotomoulded tank, capacity 2 litres, accessible from the front.

Technical Data:	
Reference	507 386
Loading	20 GN1/1 containers h. 65 mm
Space between sliders 71 mm	
External dimensions	528 x 821 x 1844 mm
Internal dimensions	330 x 590 x 1460 mm
External volume	0.799 m3
Internal volume	0.284 m3
Weight when empty	98 kg
Connected load	1.2 kW - 240 1 phase AC
	1 x 10 A
Current (A)	5.4
Power consumption	0.57 kwh
Protection index	25
Standards	NF EN 60335-1
	NF EN 60335-2-49









