## specifications


## RF7.UPR.1.SD

ReFlex Series, 1 Door (Solid), Upright Fridge



Project:

Item No:

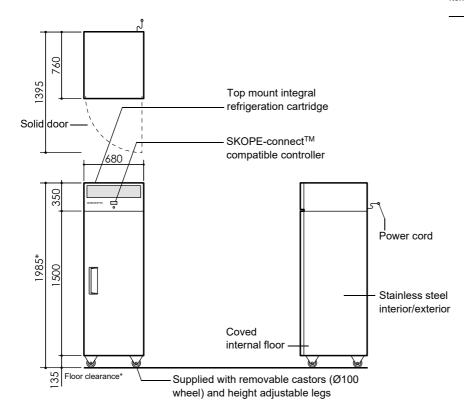

**CABINET** 

Model ID RF7.UPR.1.SD SKOPE ID RF7UPR1-SCTP-SD

Doors 1 × self-closing, lockable, solid swing door. RH
Internal door opening 1 × door openings: 1375mm high × 555mm wide

Shelves 5 × adjustable height shelves: 540mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior lighting 1 × 1200mm, 12W LED light (door activated)

Power cord Supplied with 2.3m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

**REFRIGERATION** 

Controller SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable refrigeration cartridge (part number

UTKCNI-0017)

Refrigerant R290 / 70g (natural refrigerant)

Nominal capacity 450 Watts

Heat rejection (Avg/peak) 100 Watts/110 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIME	NICI	$\sim$	10
JUVIE	171.7	יונ או	u.¬

	External	Internal
Height	1985mm*	1395mm
Width	680mm	560mm
Depth	760mm	600mm
Floor area	0.52m <sup>2</sup>	
Weight	115kg	
Internal volume	470 litres	

With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0588 Rev. 1.3 Aug. 2019



